

Index to 1983 NASA Tech Briefs

Volume 8, Numbers 1-4

DECEMBER 1986

N92-70024

(NASA-TM-89330) INDEX TO 1983 NASA TECH
BRIEFS, VOLUME 8, NUMBERS 1-4 (NASA) 133 p

Unclas

Z9/85 0048097



Electronic Components and Circuits



Electronic Systems



Physical Sciences



Materials



Computer Programs



Mechanics



Machinery



Fabrication Technology



Mathematics and Information Sciences



Life Sciences

7N-85-TM

NMF-NO 1575

April: ISS. ACT. ONLY

SAP \$10.00

48097

P-133

This document was prepared by the NASA Scientific and Technical Information Facility operated for the National Aeronautics and Space Administration by RMS Associates. It is available from the NASA Scientific and Technical Information Facility, P.O. Box 8757, Baltimore, Maryland 21240, at \$10.00 per copy. Make checks payable to "RMS Associates."

INTRODUCTION

Tech Briefs are short announcements of new technology derived from the research and development activities of the National Aeronautics and Space Administration. These briefs emphasize information considered likely to be transferrable across industrial, regional, or disciplinary lines and are issued to encourage commercial application.

This *Index to NASA Tech Briefs* contains abstracts and four indexes — subject, personal author, originating Center, and Tech Brief Number — for 1983 Tech Briefs.

Availability of NASA Tech Briefs

Distribution of *NASA Tech Briefs*, a bi-monthly free publication, is limited to engineers in U.S. Industry and to other domestic technology transfer agents.

Requests for individual Tech Briefs or for copies of the bi-monthly publication should be addressed to the Manager, Technology Transfer Office, P.O. Box 8757, Baltimore/Washington International Airport, Maryland 21240.

If you are seeking any information on NASA's Technology Utilization Program, its documents and services, please call (301) 859-5300, Ext. 241 or 243.

The January 1982 edition of the *NASA Thesaurus* (NASA SP-7051) is used as the authority for the indexing vocabulary that appears in the subject index. The *NASA Thesaurus* should be consulted in examining the current indexing vocabulary, including associated cross-reference structure. Only the subject terms that have been selected to describe the documents abstracted in this issue appear in the subject index. Copies of the *NASA Thesaurus* may be obtained from the National Technical Information Service at \$35.00 for Volume 1 and \$20.00 for Volume 2.

Originating Center Prefixes

ARC	Ames Research Center
GSC	Goddard Space Flight Center
HQN	NASA Headquarters
KSC	Kennedy Space Center
LAR	Langley Research Center
LEW	Lewis Research Center
MFS	Marshall Space Flight Center
MSC	Johnson Space Center (formerly Manned Spacecraft Center)
NPO	Jet Propulsion Laboratory/NASA Pasadena Office

TABLE OF CONTENTS

Abstract Section

Category 01	Electronic Components and Circuits	1
02	Electronic Systems	6
03	Physical Sciences	11
04	Materials	18
05	Life Sciences	26
06	Mechanics	27
07	Machinery	41
08	Fabrication Technology	49
09	Mathematics and Information Sciences	60

Indexes

Subject	I-1
Personal Author	I-37
Originating Center/Tech Brief Number	I-59
Tech Briefs/Originating Center Number	I-63

TYPICAL ABSTRACT ENTRY

TECH BRIEF NUMBER
↓
B83-10006
TITLE → IMPROVED CONNECTOR SHELL FOR CABLE SHIELDS
INOVATORS → A. L. PRISK (CALTECH) and J. W. ROTTA JR. (CALTECH)
Aug. 1983 ← DATE
ORIGINATING CENTER NUMBER → NPO-15584 Vol. 7, No. 3, P. 246
REFERENCE IN NASA TECH BRIEF
ABSTRACT
Cable connector shell improves electrostatic and electromagnetic shielding by electrically connecting cable braid around entire circumference. Connector cable braid is slipped over ferrule and sleeve is slipped over braid, clamping it tightly to shell. Connector shell completely shields cable conductors.



Index to 1983 NASA Tech Briefs

December 1986

Abstract Section

01 ELECTRONIC COMPONENTS AND CIRCUITS

B83-10001 DIGITAL PHASE-SHIFT STANDARD

J. A. CRAMP (Bionetics Corp.)

May 1983

KSC-11250

Vol. 7, No. 3, P. 241

Digital phase-shift standard used in combination with oscillator to calibrate other phase standards and phase-angle voltmeters. Phase-shifter circuit provides two square-wave outputs, A and B, with phase difference between them selectable in 30 degrees increments. Circuit is used with input signals as low as 1 volt rms, in almost any waveform.

B83-10002 PRINTED CIRCUIT CONVERTS RF ENERGY TO DC POWER

J. TRINER and W. BROWN (Raytheon Co.)

Aug. 1983 See Also NASA CR-156866 (N81-274011/NSP)

LEW-13913

Vol. 7, No. 3, P. 242

Ultra-light-weight, large area, antenna/rectifier has 85 percent conversion efficiency. System consists of large number of repetitive circuits called 'rectenna elements.' Each element produces 2 W of power, comprises half-wave dipole, input filter, and Schottky barrier diode. Two-wire microwave transmission lines act as dc power collecting buses.

B83-10003 TWO-WIRE TO FOUR-WIRE AUDIO CONVERTER

G. L. TALLEY JR. and B. L. SEALE

Aug. 1983

KSC-11256

Vol. 7, No. 3, P. 243

Simple circuit provides interface between normally incompatible voicecommunication lines. Circuit maintains 40 dB of isolation between input and output halves of four-wire line permitting two-wire line to be connected. Balancing potentiometer, Rg, adjusts gain of IC2 to null feed through from input to output. Adjustment is done on workbench just after assembly.

B83-10004 MEASURING EXCESS NOISE IN SDL'S

S. J. KATZBERG, H. R. KOWITZ, C. W. ROWLAND, T. A. SHULL, S. L. RUGGLES (Kentron International, Inc.), and L. F. MATTHEWS

Aug. 1983

LAR-12936

Vol. 7, No. 3, P. 244

New instrument gives quantitative information on 'excess noise' in semiconductor-diode laser (SDL's). By proper

selection of detector, instrument tests any SDL from visible wavelengths through thermal infrared. Lasers determine excess noise in SKL source by measuring photocurrent generated in photodetector exposed first to reference laser then to SKL under test.

B83-10005 SOLID-STATE DC CIRCUIT BREAKER

P. HARVEY (American Science and Engineering, Inc.)

Aug. 1983

MFS-25172

Vol. 7, No. 3, P. 245

Circuit breaker with no moving parts protects direct-current (dc) loads. Current which circuit breaker opens (trip current) is adjustable and so is time delay before breaker trips. Forward voltage drop rises from 0.6 to 1.2 V as current rises to trip point. Breaker has two terminals, like fuse, therefore replaces fuse in dc circuit. Powered by circuit it protects and reset by either turning off power source or disconnecting load.

B83-10006 IMPROVED CONNECTOR SHELL FOR CABLE SHIELDS

A. L. PRISK (CALTECH) and J. W. ROTTA JR. (CALTECH)

Aug. 1983

NPO-15584

Vol. 7, No. 3, P. 246

Cable connector shell improves electrostatic and electromagnetic shielding by electrically connecting cable braid around entire circumference. Connector cable braid is slipped over ferrule and sleeve is slipped over braid, clamping it tightly to shell. Connector shell completely shields cable conductors.

B83-10007 ADD-ON SHIELDING FOR UNSHIELDED WIRE

J. C. KOENIG (CALTECH), J. W. BILLITTI (CALTECH), and J. M. TALLON (CALTECH)

Aug. 1983

NPO-15107

Vol. 7, No. 3, p. 247

Fabrication sequence used to produce compact shields slipped into place from free ends of wires already soldered into connectors at other ends. Single shields are formed into harnesses by connecting grounding jumpers. Technique is especially useful for small diameter wire attached to microminiature connectors.

B83-10008 X-RAY DETECTOR FOR 1 TO 30 KEV

G. ALCORN, J. JACKSON JR., P. GRANT, and F. MARSHALL

Aug. 1983

GSC-12682

Vol. 7, No. 3, P. 248

Array of silicon X-ray detecting diodes measures photon energy and provides image of X-ray pattern. Regardless of thickness of new X-ray detector, depletion region extends through it. Impinging X-rays generate electrons in quantities proportional to X-ray energy. X-ray detector is mated

01 ELECTRONIC COMPONENTS AND CIRCUITS

to chargecoupled-device array for image generation and processing. Useful in industrial part inspection, pulsed-plasma research and medical application.

B83-10009

LEVEL SENSOR FOR CRYOGENIC FLUIDS

N. E. SIMMONS (Rockwell International Corp.) and R. A. SCHROFF (Rockwell International Corp.)

Aug. 1983

MSC-20302

Vol. 7, No. 3, p. 249

Hot wire sensor combined with voltage-comparator circuit monitors liquid level in cryogenic-fluid storage tanks. Sensor circuit adaptable to different liquids and sensors. Constant-current source drives current through sensing probe and fixed resistor. Voltage comparator circuits interpret voltage drops to tell whether probe is immersed in liquid and is current in probe.

B83-10010

DETERMINING SOLAR-CELL OPERATING TEMPERATURE

J. S. GRIFFITH (University of New York at Binghamton), M. S. RATHOD (CALTECH), and J. S. PASLASKI (CALTECH)

Aug. 1983

NPO-15449

Vol. 7, No. 3, P. 250

Laboratory test measures effect of windspeed and wind direction. Series of tests shows solar-photovoltaic cell temperature extremely sensitive to windspeed, moderately sensitive to wind direction, and rather insensitive to ambient temperature.

B83-10017

FOCAL-PLANE-ARRAY OPTICAL PROXIMITY SENSORS

A. R. JOHNSTON (CALTECH)

Aug. 1983

NPO-15155

Vol. 7, No. 3, P. 259

Objects detected at beam axis intersections. Group of light sources or detectors is mounted in box at focal plane of lens. Box can therefore illuminate or view several axes, each corresponding to source or detector of group. Proximity sensing system developed to trigger braking system of automatically controlled car.

B83-10125

DIGITAL SINGLE-PHASE POWER-FACTOR CONTROLLER

R. W. DABNEY

Oct. 1983

MFS-25861

Vol. 7, No. 4, P. 369

Digital circuit has faster response to load changes. Digital power-factor controller senses changing motor-load torques by sampling open-circuit voltage across gate-controlled silicon switch. Circuit responds more rapidly to hanging loads than analog power-factor controllers because no low-pass filter is in feedback loop.

B83-10126

HIDING SOLAR-ARRAY BUS BARS

W. F. HUFNAGEL (Solarex Corp.)

Oct. 1983

NPO-15755

Vol. 7, No. 4, P. 370

End terminals mounted under cells, maximizing usable illuminated area. Reconfigured solar panel bus bars placed under cells, reducing portion of module area not occupied by active silicon. Underside of last cell in string of cells serves as contact for positive bus. Negative tab of last cell in string is wrapped around from top of cell. Tabs are connected to output boards mounted under cells.

B83-10127

HIGH POWER SWITCHING TRANSISTOR

P. L. HOWER (Westinghouse Electric Corp.), Y. C. KAO (Westinghouse Electric Corp.), and D. C. CARNAHAN (Westinghouse Electric Corp.)

Oct. 1983 See Also NASA CR-165372 (N81-28353/NSP)

and NASA CR-165547 (N82-18506/NSP)

LEW-13728

Vol. 7, No. 4, P. 371

Improved switching transistors handle 400-A peak currents and up to 1,200 V. Using large diameter silicon wafers with twice effective area as D60T, form basis for D7 family of power switching transistors. Package includes npn wafer, emitter preform, and base-contact insert. Applications are: 25 to 50-kilowatt high-frequency dc/dc inverters, VSCF converters, and motor controllers for electrical vehicles.

B83-10128

MEASURING TENSION IN TRANSISTOR SUSPENSIONS

W. P. HUBBARD (CALTECH)

Oct. 1983

NPO-15677

Vol. 7, No. 4, P. 372

Vibration analysis is nondestructive and noninvasive. Transistor isolated from heat (or cold) of surroundings by filament suspension. Filaments made of polyester are (0.005 in) 0.127 mm in diameter. Transistor lead wires are wrapped around certain filaments. Applicable for testing filament mounts too delicate for testing by tension probes.

B83-10129

DETECTING SOLAR-CELL FAILURES

T. J. MALONEY (AIA Research Corporation)

Oct. 1983

NPO-15741

Vol. 7, No. 4, P. 373

Circuit identified malfunctioning photovoltaic array. Cell-failure detection circuit compares output of photovoltaic array to control cell. If any module fails, activates light-emitting diode. Circuit could also sound alarm.

B83-10130

DEVELOPING STANDARDS FOR PHOTOVOLTAIC DEVICES

A. R. HOFFMAN (CALTECH), R. G. ROSS JR. (CALTECH), and S. H. GASNER (CALTECH)

Oct. 1983

NPO-15734

Vol. 7, No. 4, P. 374

Ground rules outlined for evaluating photovoltaic technology. Document addresses number of performance attributes: electrical, thermal, mechanical, structural, safety, reliability, durability, installation, operation, maintenance, building and site. Each criterion includes user need or expectation for element and describes method of test.

B83-10131

ELECTRONIC-POWER-TRANSFORMER DESIGN GUIDE

G. E. SCHWARZE, J. C. LAGADINOS (MagCap Engineering, Inc.), and J. F. AHEARN (MagCap Engineering, Inc.)

Oct. 1983 See Also NASA CR-134992 (N78-29353/NSP)

LEW-13208

Vol. 7, No. 4, P. 374

Compilation of information on design procedures, electrical properties, and fabrication. Guide provides information on design procedures; magnetic and insulating material electrical properties; impregnating, encapsulating and processing techniques.

B83-10247

BAND-PASS AMPLIFIER WITHOUT DISCRETE REACTANCE ELEMENTS

L. KLEINBERG

Apr. 1984

GSC-12788

Vol. 8, No. 1, P. 03

Inherent or 'natural' device capacitance exploited. Band-Pass Circuit has input impedance of equivalent circuit at frequencies much greater than operational-amplifier rolloff frequency. Apparent inductance and capacitance arise from combined effects of feedback and reactive component of amplifier gain in frequency range.

B83-10248

PHASE DETECTOR FOR POWER-FACTOR CONTROLLER

F. J. NOLA

Apr. 1984

MFS-25854**Vol. 8, No. 1, P. 04**

Positive feedback assures reliable switching. Three Phase Power Factor Controller includes three phase detectors, each produces rectangular waves of duration approximately equal to lag time between line voltage and motor current.

B83-10249**POWER-FACTOR CONTROLLER WITH FAST LOAD RESPONSE**

F. J. NOLA

Apr. 1984

MFS-25852**Vol. 8, No. 1, P. 05**

Sudden changes in induced emf sensed. In refinement of soft starting three phase power-factor controller, additional components enable circuit to respond quickly to sudden increase in motor load. Rapid-load-response addition senses induced motor emf to detect sudden load increase and generates command signal to increase applied power in response.

B83-10250**SHIELDED ALUMINUM FLAT-CONDUCTOR CABLE**

S. FARINA (Flexible Circuits, Inc.)

Innovator Not Given (Lockheed Missiles & Space Co., Inc. Apr. 1984)

MFS-25899**Vol. 8, No. 1, P. 07**

Thin wiring harness stores compactly. Flat aluminum conductors glued between layers of polyimide. Aluminum shield surrounds insulated conductors. Outer layer polyimide. Aluminum shield reduces flexibility of cable and cable withstand only limited number of repetitions of sharp bending at same spot.

B83-10251**CONICAL ELECTRICAL CONNECTORS ALINE EASILY**

K. H. CLARK

1984

MFS-25211**Vol. 8, No. 1, P. 08**

Rotational alignment not critical in design useful for remote manipulators. Plug and socket pushed together, plug rings deflect spring segments of corresponding socket ring. Particularly suitable for remote manipulators and making connections in 'blind' locations.

B83-10252**DIRECTIONAL COUPLER WITH INCREASED DIRECTIVITY**

H. M. PICKETT (CALTECH) and A. E. CHIOU (CALTECH)

Apr. 1984

NPO-15892**Vol. 8, No. 1, P. 9**

Diffraction loss reduced by curving one reflector. In improved diplexer, adjustable reflector has toroidal curvature to reduce diffraction loss through open cavity ends. Primarily used in local oscillator diplexers, new design increases signal to noise ratios and therefore ranges of millimeter and submillimeter heterodyne receivers.

B83-10253**USING A PFET TO COMMUTATE AN SCR**

D. B. EDWARDS (CALTECH) and W. E. RIPPLE (CALTECH)

Apr. 1984

NPO-15282**Vol. 8, No. 1, P. 10**

Accidental turn-on prevented. PFET diverts load current around SCR to prevent false SCR triggering from current and voltage switching transients. New circuit used in all types of single phase and polyphase inverters and in buck-boost, and flyback regulators.

B83-10254**DIGITAL SOLDERING-IRON TESTER**

R. N. BUGGLE (Honeywell, Inc.) and W. H. METKA JR. (Honeywell, Inc.)

Apr. 1984

MFS-25863**Vol. 8, No. 1, P. 12**

Instrument reads tip temperature and contact potential in seconds. Tinned soldering tip touched to temperature sensitive button for 4 seconds and to voltage probe for 1 to 3 seconds. Tip temperature and voltage appear on digital displays. Instrument quickly gives assurance conditions are correct for reliable soldering.

B83-10255**ERROR-COMPENSATED INTEGRATE AND HOLD**

M. MATLIN

Apr. 1984

ARC-11303**Vol. 8, No. 1, P. 12**

Differencing circuit cancels error caused by switching transistors capacitance. In integrate and hold circuit using JFET switch, gate-to-source capacitance causes error in output voltage. Differential connection cancels out error. Applications in systems where very low voltages sampled or many integrate-and-hold cycles before circuit is reset.

B83-10256**PAIRWISE COMPARISON OF VOLTAGE SETS**

C. M. VERBER (Battelle Columbus Laboratories) and R. P. KENAN (Battelle Columbus Laboratories)

Apr. 1984

LAR-12929**Vol. 8, No. 1, P. 13**

Optical preprocessor compares 16 incoming signals with reference voltages. Integrated optical subtraction to take 'vector difference' of two sets of analog voltages. Applications include satellite onboard processing of pictorial data so data not useful discarded; device recognizes presence of accessible cloud cover and signals halt to data transmission.

B83-10257**STABILIZING CRYSTAL OSCILLATORS WITH MELTING METALS**

J. B. STEPHENS (Caltech) and C. G. MILLER (Caltech)

Apr. 1984

NPO-15641; NPO-15642; NPO-15643 Vol. 8, No. 1, P. 14

Heat of fusion provides extended period of constant temperature and frequency. Crystal surrounded by metal in spherical container. As outside temperature rises to melting point of metal, metal starts to liquefy; but temperature stays at melting point until no solid metal remains. Potential terrestrial applications include low-power environmental telemetering transmitters and instrumentation transmitters for industrial processes.

B83-10258**SCM HANDBOOKS FOR DC-TO-DC CONVERTERS**

F. LEE (Virginia Polytechnic Institute and State University), M. MOHMOUD (Virginia Polytechnic Institute and State University), and Y. YU (TRW Defense and Space Systems Group)

Apr. 1984 SEE ALSO NASA CR-165172 (N81-10301/NSP) and NASA CR-165173 (N8111314/NSP)

LEW-13886**Vol. 8, No. 1, P. 15**

Two documents aid in design of control modules for dc-to-dc converters. Features of SCM include: Adaptive stability, power component stress limiting, implementation of various control laws, unified design approach. Analysis and guidelines contained in handbooks enable engineer to design SCM circuit and confidently predict resulting overall performance.

B83-10259**SOLID-STATE CROSSBAR SWITCH**

T. O. ANDERSON (CALTECH)

Apr. 1984

NPO-15066**Vol. 8, No. 1, P. 16**

Combines analog and digital circuits for multiline/multiport switching. Bidirectional solid-state crossbar switch provides interfacing and switching for 16 X24 coordinate ports for 16 parallel signal lines. Intended for rapid manual-controlled or computer controlled reconfiguration of distributed computing systems.

01 ELECTRONIC COMPONENTS AND CIRCUITS

B83-10260

DETECTING DEFECTIVE SOLDER BONDS

R. PAULSON (Lockheed Missiles & Space Co., Inc.), J. BARNEY (Lockheed Missiles & Space Co., Inc.), and H. J. DECKER

Apr. 1984

MFS-25507

Vol. 8, No. 1, P. 16

Method is noncontact and nondestructive. Technique detects solder bonds in solar array of other large circuit board, using thermal-imaging camera. Board placed between heat lamp and camera. Poor joints indicated by 'cold' spots on the infrared image.

B83-12261

BLOWING DUST AWAY WITH ELECTROSTATIC WIND

M. G. UTTER (University of Arizona)

Apr. 1984

HQN-10936

Vol. 8, No. 1, P. 16

Ionized air molecules drive away contaminants. Electrostatic wind prevents dust buildup and subsequent electrical breakdown in powerlines, transformers, switchgears, Van de Graaff generators, electrostatic precipitators, and other high-voltage equipment. Makes periodic cleaning or airblasting unnecessary.

B83-10262

IMPROVED COIL FOR HYDROGEN DISSOCIATORS

R. VESSOT (Smithsonian Institution)

Apr. 1984

MFS-25638

Vol. 8, No. 1, P. 16

Flat coil has rigid printed circuit substrate. New coil structure minimizes RF electric field near glass walls of plasma vessel; therefore reduces direct electron bombardment of glass. Design lends itself well to high production and standardized dimensions.

B83-10263

THE EFFECT OF COSMIC RAYS ON MSI DEVICES

D. K. NICHOLS (CALTECH), W. E. PRICE (CALTECH), and J. P. WOODS (MIT)

Apr. 1984

NPO-15779

Vol. 8, No. 1, P. 16

Low-power devices susceptible to cosmic-ray particles. Five MSI device technologies, including TTL, low power TTL, Schottky, CMOS, and low-power Schottky, subjected to 120-MeV krypton-ion beam from cyclotron and monitored for single-event upset. Results find terrestrial application for radiation hardening of electronic devices and systems.

B83-10264

COOLING WAVEGUIDE FLANGES IN MICROWAVE TRANSMITTERS

B. C. CHEN (CALTECH) and R. W. HARTOP

Apr. 1984

NPO-15401

Vol. 8, No. 1, P. 16

Flange appendage circulates coolant for conductive heat removal. Flange appendage bore accommodates coolant tube. O-ring surrounds bore; when adjacent waveguide sections are bolted together, continuous conduit is formed for coolant. Pressure release groove in modified flange prevents coolant from entering waveguide should O-ring seal fail.

B83-10265

UNCOOLED IR DETECTOR

P. J. SHLICHTA (CALTECH)

Apr. 1984

NPO-14832

Vol. 8, No. 1, P. 17

Detector combines liquid crystal film with light-sensitive solid-state array. Liquid-crystal film acts as IR detector when maintained just below temperature of transition from opacity to transparency. When IR radiation is absorbed by film, resultant heating changes visiblelight transmission, modulating uniform visible light beam as it passes through film.

B83-10267

IMPROVED TWO-PHASE SWITCHING REGULATOR

W. E. RIPPEL (CALTECH)

Apr. 1984

NPO-15172

Vol. 8, No. 1, P. 17

Coupled-inductor polyphase regulator has better efficiency and lower inductor losses. Improved two-phase switching regulator employs negative coupling between inductors to achieve better power-to-weight ratio while reducing peak switching currents and inductor losses. Improvement of about 35 percent using new technique.

B83-10268

TI/PD/CU CONTACTS FOR SEMICONDUCTOR DEVICES

R. B. CAMPBELL (Westinghouse Electric Corp.) and A. ROHATGI (Westinghouse Electric Corp.)

Apr. 1984

NPO-15043

Vol. 8, No. 1, P. 17

Copper systems equivalent in performance to silver or gold systems. Titanium layer and palladium layer deposited on semiconductor device by electron beam evaporation. Desired pattern etched using photoresist. Thin layer of copper plated on contact pattern from cyanide solution. Copper layer then built up to 4 to 8 microns by electroplating from acid solution.

B83-10269

IMPROVED HIGH-CURRENT DRIVE CIRCUIT

S. W. COLE (CALTECH)

Apr. 1984

NPO-14938

Vol. 8, No. 1, P. 17

Uses VMOS field-effect power transistor. High-current drive circuit employs n-channel enhancement-mode VMOS field-effect power transistor to eliminate problem of oscillation at high power encountered in conventional circuits with bipolar transistors. Drive voltage required is typically 1 to 3 V for load current of 10 A.

B83-10270

PROGRAMABLE POWER CONDITIONER

J. R. LANIER, R. E. KAPUSTKA, and J. R. GRAVES

Apr. 1984

MFS-25531

Vol. 8, No. 1, P. 18

Accepts range of inputs and produces range of outputs. Versatile power conditioner programed to handle power from wide range of sources such as solar arrays, fuel cells, and electrochemical batteries. Conditioner consists of two parts. Power stage is switching regulator. Controller stage uses microprocessor to generate analog control signal for power stage.

B83-10271

ANTENNA FOR IMAGING SEA ICE

F. T. BARATH (CALTECH) and R. L. JORDAN (CALTECH)

Apr. 1984

NPO-15352

Vol. 8, No. 1 P. 18

Antenna for imaging of polar regions has terrestrial applications. Antenna consists of four horizontally-polarized 19.0 by 0.6-m planar waveguide arrays and appropriate feed networks mounted on single aluminum supporting structure. Antenna suitable for high quality imaging of sea ice in polar regions above 60 degrees latitude.

B83-10497

INFRARED-RESPONSIVE MONOLITHIC MOS CIRCUIT

Nov. 1984

GSC-12782

Vol. 8, No. 2, P. 165

Lead chalcogenide photoresistors integrated with FET amplifiers. Circuit combines voltage divider containing lead chalcogenide photoresistor with FET source follower. Source and drain of FET p-doped regions in underlying n-type silicon wafer. All other structures formed at or deposited above original surface plane of wafer.

B83-10498

LOW-NOISE SUBMILLIMETER-WAVE DIODE

01 ELECTRONIC COMPONENTS AND CIRCUITS

R. J. MATTAUCH (University of Virginia)

Nov. 1984

NPO-15935

Vol. 8, No. 2, P. 166

Low noise achieved without usual high resistance. Barrier of p-type material placed between metal anode and heavily-doped gallium arsenide. Ntype epitaxial layer eliminated. Barrier prevents quantum tunneling of electrons between semiconductor and metal. Higher breakdown structure provided.

B83-10499

SIMPLIFIED HIGH-POWER INVERTER

D. B. EDWARDS (CALTECH) and W. E. RIPPEL (CALTECH)

Nov. 1984

NPO-15961

Vol. 8, No. 2, P. 167

Solid-state inverter simplified by use of single gate-turnoff device (GTO) to commutate multiple silicon controlled rectifiers (SCR's). By eliminating conventional commutation circuitry, GTO reduces cost, size and weight. GTO commutation applicable to inverters of greater than 1-kilowatt capacity. Applications include emergency power, load leveling, drives for traction and stationary polyphase motors, and photovoltaic-power conditioning.

B83-10500

ENERGY-SAVING INVERTER

W. E. RIPPEL (CALTECH) and D. B. EDWARDS (CALTECH)

Nov. 1984

NPO-15291

Vol. 8, No. 2, P. 168

Commutation by field-effect transistor allows more efficient operation. High voltage field-effect transistor (FET) controls silicon controlled rectifiers (SCR's). Circuit requires only one capacitor and one inductor in commutation circuit: simpler, more efficient, and more economical than conventional inverters. Adaptable to dc-to-dc converters.

B83-10501

SCHOTTKY-BARRIER PHOTOCELL WITH INTERMEDIATE METAL LAYER

G. E. ALCORN, C. Z. LEINKRAM, and O. OKUNOLA

Nov. 1984

GSC-12816

Vol. 8, No. 2, P. 169

Device output and durability increased. Photosensitive GaAs Schottkybarrier device modified by addition of intermediate layer of refractory or alkaline earth metal Photovoltaic cells and photosensors made with new design put out higher short-circuit currents and better able to withstand rigors of handling and connection to other circuit components.

B83-10502

FEEDTHROUGH SEAL FOR HIGH-PRESSURE VESSEL

R. WILLIAMS, O. MULLINS (Lockheed Engineering and Management Services Co., Inc.), D. SMITH (Lockheed Engineering and Management Services Co., Inc.), and G. TEASLEY (Lockheed Engineering and Management Services Co., Inc.)

Nov. 1984 See Also NASA TM-8251

MSC-20625

Vol. 8, No. 2, P. 170

Combination of ceramic and plastic withstands many depressurizations. Stack of washers surrounds leadthrough electrode. Under pressure washers expand to fill leadthrough hole in high-pressure vessel. Seal thus formed withstands 20 or more pressurization/depressurization cycles. Seal composed of neoprene, polytetrafluoroethylene, nylon and high-purity, high-density commercial alumina ceramic.

B83-10503

STRIPLINE ANTENNA BEAM-FORMING NETWORK

P. W. CRAMER (CALTECH)

Nov. 1984

NPO-15743

Vol. 8, No. 2, P. 171

Stripline antenna beam-forming network includes 87 beam ports and 136 feed-element ports and contained on only two microstrip boards. Both uplink and downlink strips supported on same boards. Originally used for communica-

tions coverage of continental United States for Land Mobile Satellite System, structure of interest to antenna designers in other applications.

B83-10504

FINDING OPEN FAULTS IN CMOS CIRCUITS

R. CHANDRAMOULI (CALTECH)

Nov. 1984

NPO-15838

Vol. 8, No. 2, P. 171

Algorithm specifies sequence of input test signals and interpretation of resulting output signals for identifying stuck-open faults in complementary metal-oxide semiconductor (CMOS) integrated logic circuits. Incorporated in software for online production testing of CMOS circuits.

B83-10505

FLIP-FLOP DIGITAL MODULATOR

R. F. ENO (Rockwell International Corp.)

Nov. 1984

MSC-20334

Vol. 8, No. 2, P. 172

Clock switched on and off in response to data signal. Flip-flop modulator generates square-wave carrier frequency that is half clock frequency and turns carrier on and off. Final demodulator output logical inverse of data input.

B83-10506

SCREENING PLASTIC-ENCAPSULATED SOLID-STATE DEVICES

L. BULDHAUPT (The Boeing Aerospace Co.)

Nov. 1984 See Also NASA CR-161946 (N82-16343/NSP) and NASA CR-161947 (N82-16344/NSP)

MFS-25802

Vol. 8, No. 2, P. 173

Suitability of plastic-encapsulated solid-state electronic devices for use in spacecraft discussed. Conclusion of preliminary study was plasticencapsulated parts sufficiently reliable to be considered for use in lowcost equipment used at moderate temperature and low humidity. Useful to engineers as guides to testing or use of plastic encapsulated semiconductors in severe terrestrial environments.

B83-10507

RADIATION-HARDNESS DATA FOR SEMICONDUCTOR DEVICES

W. E. PRICE (CALTECH), D. K. NICHOLS (CALTECH), S. F. BROWN (CALTECH), M. K. GAUTHIER (CALTECH), and K. E. MARTIN (CALTECH)

Nov. 1984

NPO-15787

Vol. 8, No. 2, P. 174

Document presents data on and analysis of radiation hardness of various semiconductor devices. Data specifies total-dose radiation tolerance of devices. Volume 1 of report covers diodes, bipolar transistors, field effect transistors, silicon controlled rectifiers and optical devices. Volume 2 covers integrated circuits. Volume 3 provides detailed analysis of data in volumes 1 and 2.

B83-10508

OPTICAL TESTING OF INTEGRATED CIRCUITS

J. ERICKSON (Hughes Aircraft Co.)

Nov. 1984

MFS-25498

Vol. 8, No. 2, P. 174

Optical spot-raster scanner produces weighted photoresponse image (PI) of operating CMOS IC. Digital analysis of PI's, which correlates differences in PI's with electrical behavior of IC, shows promise both as 100-percent screening method for use in IC manufacture and as diagnostic tool in IC development.

B83-10509

DEMODULATOR FOR AM AND SSB-SC SIGNALS

C. P. HEARN and E. S. BRADSHAW

Nov. 1984

LAR-12716

Vol. 8, No. 2, P. 174

Compatible linear demodulator (CLD) detects either amplitude modulation (AM) or single-sideband suppressed-carrier (SSB-SC) modulation. Carrier recovery homodyne

01 ELECTRONIC COMPONENTS AND CIRCUITS

product detector designed for voice communication but easily scaled to other frequencies.

B83-10510 **CONTROLLING AN INVERTER-DRIVEN THREE-PHASE MOTOR**

C. DOLLAND (Airesearch Manufacturing Co.)
Nov. 1984

MFS-25215 Vol. 8, No. 2, P. 175
Control system for three-phase permanent-magnet motor driven by linecommutated inverter uses signals generated by integrating back emf of each phase of motor. High-pass filter network eliminates low-frequency components from control loop while maintaining desired power factor.

B83-10511 **SHIELDING ELECTRIC CONNECTORS FROM LIGHTNING** W. B. PIERCE (CALTECH) and W. G. COLLINS (CALTECH) Nov. 1984

NPO-15688 Vol. 8, No. 2, P. 175
Metallic shield for plastic-body electric power connectors, with provision for attaching cable shielding, prevents lightning-induced overvoltages from damaging sensitive electronic equipment.

B83-10512 **REMOTELY-OPERATED TRAFFIC CONTROL LIGHT** J. S. REEDY

Nov. 1984
ARC-11406 Vol. 8, No. 2, P. 175
Traffic warning light for school crossing, construction zones, and other hazardous areas activated by remote control. Apparatus consists of small radio transmitter, pole-mounted strobe light with attached power supply and radio receiver.

B83-10513 **SERVO LEAD COMPENSATION** E. BUCHANAN (Rockwell International Corp.) Nov. 1984

MFS-19614 Vol. 8, No. 2, P. 175
Circuit for continuously varying lead compensation in servosystem operative even when integrating amplifier goes into saturation.

B83-10514 **DIGITAL CONTROL OF ANALOG DETECTOR** J. BROWN (Rockwell International Corp.) Nov. 1984

MFS-19608 Vol. 8, No. 2, P. 175
Reference level required to set switching point of analog comparator at desired level determined and set by computer controlled circuit.

B83-10515 **MINIATURE TEMPERATURE-CONTROL CIRCUIT** R. H. COUCH

Nov. 1984
LAR-12900 Vol. 8, No. 2, P. 175
Operates on any power supply voltage from 6 to 28 volts. Miniature thermostate circuit controls electric heating element to maintain constant temperature in oven or other thermal environment.

B83-10516 **POWER-MEASUREMENT ERRORS DUE TO INSTRUMENT LAG** D. P. ATHANS (CALTECH)

Nov. 1984
NPO-15029 Vol. 8, No. 2, P. 176
Short-risetime pulses contain frequency components above flat-response region of typical instrumentation amplifiers.

B83-10517 **MULTIPLE-BAND-GAP SOLAR-CELL CONCEPT** A. A. NUSSBERGER (Rockwell International Corp.) Nov. 1984

MFS-25724 Vol. 8, No. 2, P. 176
Multiple band gap photovoltaic structures convert greater portion of insolation to electricity than present solar cells.

B83-10518 **CONTINUITY/ISOLATION CHECKER** J. O. LONBORG

Nov. 1984
NPO-15632 Vol. 8, No. 2, P. 176
Buzzer indicates very high or very low resistance between probes. Instrument checks for either continuity or isolation between two points in electrical circuit.

B83-10519 **HIGH-COMMON-MODE-REJECTION DIFFERENTIAL AMPLIFIER** F. E. LUKENS

Nov. 1984
MFS-25868 Vol. 8, No. 2, P. 176
High-common-mode-rejection differential amplifier amplifies low-level signals in presence of high frequency noise. Amplifier used in power system requiring current monitoring on high side of high-voltage powerline.

B83-10520 **PAINT-THICKNESS CHECKER** C. NELSON (Beech Aircraft Corp.) Nov. 1984

KSC-11270 Vol. 8, No. 2, P. 176
Eddy-current flaw detector with cathode-ray tube (CRT) used to compare layer thickness of conductive paint on metallic substrates.

02 ELECTRONIC SYSTEMS

B83-10011 **FAST ELECTRONIC SOLAR CELL TESTER** J. W. LATHROP (Clemson University) and C. R. SAYLOR (Clemson University) Aug. 1983

NPO-15676 Vol. 7, No. 3, P. 253
Microcomputer controlled system gather current and voltage data. System consists of light source, microcomputer, programmable dc power supply, analog/digital interface, and data storage display equipment. Applies series of test loads to cell via programmable dc power supply to obtain I/V characteristic curve and key cell-performance parameter. Apparatus and programming technique are applicable to devices such as batteries and sensors.

B83-10012 **EFFICIENT DISTRIBUTION OF FREQUENCY-STANDARD SIGNALS**

R. F. MEYER (CALTECH), R. L. SYDNOR (CALTECH), and J. W. MACCONNELL (CALTECH)
Aug. 1983
NPO-15392 Vol. 7, No. 3, P. 255
Low power system distributes precise frequency standard signal to network of remote stations. Reference frequency at phase angle modulates transmitter at master transmitter/receiver circuit and recovers at remote circuit. Two circuits continuously transmit on microwave or optical signals 100 MHz apart to effect synchronization of reference frequency and phase.

B83-10013**CODING FOR SINGLE-LINE TRANSMISSION**

L. G. MADISON (Martin Marietta Corp.)

Aug. 1983

KSC-11220**Vol. 7, No. 3, P. 256**

Digital transmission code combines data and clock signals into single waveform. MADCODE needs four standard integrated circuits in generator and converter plus five small discrete components. MADCODE allows simple coding and decoding for transmission of digital signals over single line.

B83-10014**ROUNDING TECHNIQUE FOR HIGH-SPEED DIGITAL SIGNAL PROCESSING**

E. R. WECHSLER (CALTECH)

Aug. 1983

NPO-15307**Vol. 7, No. 3, P. 257**

Arithmetic technique facilitates high-speed rounding of 2's complement binary data. Conventional rounding of 2's complement numbers presents problems in high-speed digital circuits. Proposed technique consists of truncating K + 1 bits then attaching bit in least significant position. Mean output error is zero, eliminating introducing voltage offset at input.

B83-10015**RECEIVER FOR ANTENNA ARRAYS**

M. H. BROCKMAN (CALTECH) and M. F. EASTERLING (CALTECH)

Aug. 1983

NPO-15089**Vol. 7, No. 3, P. 257**

Diversity reception system combines narrow-band signals from several antennas to yield amplified demodulated signal. System was developed for spacecraft command signals, which typically have bandwidths of few hundred hertz.

B83-10016**SEARCHING FOR CLEAR-AIR TURBULENCE**

B. L. GARY (CALTECH)

Aug. 1983

NPO-15351**Vol. 7, No. 3, P. 258**

System for determining potential location and severity of clear-air turbulence based on passive microwave sensor. Horn antenna for prototype clear-air-turbulence warning system rotatable through plus or minus 45 degrees. Permits safer more comfortable flights for commercial airplanes and enables safer inflight refueling for military airplanes.

B83-10018**IMPROVING CONTROL OF REMOTE MANIPULATORS**

A. K. BEJCZY (CALTECH)

Aug. 1983

NPO-15049**Vol. 7, No. 3, P. 260**

Advanced theoretical and experimental developments in field of remote manipulators discussed in conference preprint. Report synthesizes number of sensing and control techniques.

B83-10132**MICROCOMPUTER MULTIPLEXES ALPHANUMERIC LABELS ON CRT'S**

T. COOPER (Narco Scientific)

Oct. 1983

MSC-20079**Vol. 7, No. 4, P. 377**

External, low-power alphanumeric label generator eliminates costly video circuitry. Microprocessor-based system for multiplexing alphanumeric and analog data stores both program and data. Uses inexpensive circuits, consumes minimal current, is programmable by user, adapts to many CRT monitors. System generates 5-by-7 dot-matrix characters. System speed is adequate for medical monitoring purposes.

B83-10133**NRZ DATA ASYMMETRY CORRECTOR AND CONVOLUTIONAL ENCODER**

H. J. PFIFFNER (Hughes Aircraft Co.)

Oct. 1983

MSC-20187**Vol. 7, No. 4, P. 379**

Circuit compensates for timing, amplitude and symmetry perturbations. Data asymmetry corrector and convolutional encoder regenerate data and clock signals in spite of signal variations such as data or clock asymmetry, phase errors, and amplitude variations, then encode data for transmission.

B83-10134**LINKING 'SMART' MODULES BY A SINGLE CHANNEL**

W. H. KOHL (CALTECH)

Oct. 1983

NPO-15342**Vol. 7, No. 4, P. 379**

System architecture brings order to potentially chaotic situation. New configuration allows many 'smart' modules (each containing memory and microprocessor) to be linked by common data channel. Architecture allows each module to carry on operations at own data rate within block of time, while communications between modules occur in strict synchronism.

B83-10135**RADAR FOR MAPPING SEA ICE**

F. T. BARATH (Caltech) and R. L. JORDAN (Caltech)

Oct. 1983

NPO-15350**Vol. 7, No. 4, P. 381**

X-band system has 100-m2 resolution. Wide swath imaging radar of synthetic aperture type transmits signal to ground station for subsequent processing into imagery. Concept meets functional requirements for continuously mapping sea ice in north and south polar regions.

B83-10136**VLSI UNIT FOR TWO-DIMENSIONAL CONVOLUTIONS**

K. Y. LIU (Caltech)

Oct. 1983

NPO-15224**Vol. 7, No. 4, P. 382**

Universal logic structure allows same VLSI chip to be used for variety of computational functions required for two dimensional convolutions. Fast polynomial transform technique is extended into tree computational structure composed of two units: fast polynomial transform (FPT) unit and Chinese remainder theorem (CRT) computational unit.

B83-10137**CIRCUITRY FOR ANGLE MEASUREMENTS**

J. R. CURRIE and R. R. KISSEL

Oct. 1983

MFS-25825**Vol. 7, No. 4, P. 383**

Angle resolver pulsed and read under microprocessor control. Pulse generator excites resolver windings with dual slope pulse. System sequentially reads sine and cosine windings. Microprocessor determines angle through which resolver shaft turned from reference angle. Suitable applications include rate tables, antenna direction controllers, and machine tools.

B83-10138**MEASURING POWER FLOW IN ELECTRIC VEHICLES**

J. GRIFFIN, DANIELC. (CALTECH) and G. A. WIKER

(CALTECH)

Oct. 1983

NPO-15514**Vol. 7, No. 4, P. 384**

Instrument accommodates fast rise and fall times of waveforms characteristic of modern, efficient power controllers. Power meter multiplies analog signals proportional to voltage and current, and converts resulting signal to frequency. Two mechanical counters provided: one for charging, one for discharging.

02 ELECTRONIC SYSTEMS

B83-10139

PORTABLE DATA LOGGER FOR PHOTOVOLTAIC PANELS

S. W. COLE (CALTECH)

Oct. 1983

NPO-15158

Vol. 7, No. 4, P. 385

Instrument measures rapidly changing knee of V-I curve with extra care. Portable data logger runs on own batteries. Includes microcomputer, which controls voltage-, current-measurement increment, and solid state memory, which stores data until transferred to EPROM module. Data logger is light, compact and easily carried to remote field locations.

B83-10272

LIGHTNING-TRANSIENT RECORDER

R. L. GRUMM (CALTECH)

Apr. 1984

NPO-15895

Vol. 8, No. 1, P. 21

Battery-powered system operates for more than one year. Recorder digitizes and records up to 146 current samples at selected intervals during lightning stroke. System continues to store time tags of lightning strokes even if transient current memory is full.

B83-10273

VIRTUAL-CENTER ANTENNA-ARRAYING SYSTEM

L. J. DEUTSCH (CALTECH), J. W. LAYLAND (CALTECH),

R. G. LIPES (CALTECH), and R. L. MILLER (CALTECH)

Apr. 1984

NPO-15874

Vol. 8, No. 1, P. 22

Separate signals averaged to produce reference frequency and phase. System develops reference carrier from separate received signals. Phase of signal at each receiver determined by comparison with reference phase. Useful in applications requiring accurate phase estimates: reception of weak telemetry signals, transmitter or reflector locating, nondestructive testing of structures, or geophysical exploration.

B83-10274

PHASED-ANTENNA-ARRAY CONICAL SCANNING

J. R. LESH (CALTECH)

Apr. 1984

NPO-15899

Vol. 8, No. 1, P. 23

Antenna pointing faster than mechanical scanning. Three antenna phased array connected to receiving signal-processing system through two phase-shifting networks. Two networks simultaneously steer phased array in two slightly-different beam directions; one for scanning, one for tracking. Technique has many uses in military and civilian radar, principally in tracking aircraft, balloonborne weather instruments, and other moving signal sources or reflectors.

B83-10275

BINARY CORRELATOR FOR ELECTROMAGNETIC SIGNAL PATTERNS

J. B. GARRISON (Johns Hopkins University) and R. E. JENKINS (Johns Hopkins University)

Apr. 1984

GSC-12714

Vol. 8, No. 1, P. 24

Modulation patterns recognized with extensive calculations. Set of shift registers contains patterns of 1's and 0's representing presence or absence of received signal in designated time/frequency bins. Pattern in shift registers correlated with pattern of expected signal by shifting each cell to right according to expected pattern and summing shift-register outputs in analog summing network. Useful in applications requiring identification of smaller pattern of 1-bit data within larger matrix of such data.

B83-10276

RADAR CUTS SUBSOIL SURVEY COSTS

R. JOHNSON (U.S. Department of Agriculture) and R. GLACCUM (Technos, Inc.)

Apr. 1984

KSC-11227

Vol. 8, No. 1, P. 25

Soil features located with minimum time and labor. Ground-penetrating radar (GPR) system supplements manual and mechanical methods in performing subsurface soil survey. Mobile system obtains graphic profile of soil discontinuities and interfaces as function of depth. One or two test borings necessary to substantiate soil profile. GPR proves useful as reconnaissance tool.

B83-10277

'FUEL GAGE' FOR ELECTRIC VEHICLES

J. J. ROWLETTE (CALTECH)

Apr. 1984

NPO-15759

Vol. 8, No. 1, P. 26

Gas-emission and time-integrated-current measurements indicate battery charge state. Tests indicate possibility of monitoring state of charge of lead/acid batteries at any stage in charging cycle by measuring charging current and either gas evolution or electrode potential. Data then processed by microcomputer. Uses include cell voltage, cell pressure, cell temperature and rate of gas recombination on catalyst.

B83-10278

MEASURING SOFTWARE-EXECUTION TIME

C. PINERA (International Business Machines Corp.)

Apr. 1984

KSC-11267

Vol. 8, No. 1, P. 27

Test circuit times routines even during multiprogram operation. Circuit generates pulse started by signal at beginning address of program under test and ended by signal at ending address. Pulse duration measured with logic analyzer to determine execution time.

B83-10279

TELEMETRY SPEEDS FOREST-FIRE CONTROL

J. C. ARVESEN and J. W. CHERBONNEAUX

Apr. 1984

ARC-11438

Vol. 8, No. 1, P. 28

Airborne system rapidly delivers hard copy to firefighters. Sensors in airplane send data to ground station for image processing. Imagery immediately transferred to U.S. Geologic Survey (USGS) maps by photo interpreter. Maps transmitted by telecopies directly to fire-control camps. Receipt by fire camp less than 10 minutes. Information aids in decisions involving deployment of firefighters and equipment, flood control, monitoring oilspills, observing thermal currents, and pollutions monitoring.

B83-10280

DUAL-RATE TRANSMISSION REDUCES WEATHER EFFECTS

E. C. POSNER (CALTECH)

Apr. 1984

NPO-15807

Vol. 8, No. 1, P. 29

Scheme ensures maximum data received on average. Dual-rate scheme for maximizing data returned during spacecraft mission, adaptable, as is or with modifications, to high-frequency terrestrial data transmission. Data rate fixed in advance at minimum value guarantees reasonable prospect of success during bad weather. Dualrate strategy yields net data rate 2.5 times best achievable with single transmission rate.

B83-10281

CHARGE EFFICIENCY TESTS OF LEAD/ACID BATTERIES

J. J. ROWLETTE (CALTECH)

Apr. 1984

NPO-15869

Vol. 8, No. 1, P. 29

Current, voltage, and gas evolution measured during charge/discharge cycles. Series of standardized tests for evaluating charging efficiency of lead/acid storage batteries described in report. Purpose of tests to provide information for design of battery charger that allows maximum recharge efficiency for electric-vehicle batteries

consistent with other operating parameters, such as range, water loss, and cycle life.

**B83-10282
EXTENDING THE MEMORY OF MICROCOMPUTERS**

G. A. WIKER (CALTECH)

Apr. 1984

NPO-15295

Vol. 8, No. 1, P. 30

Memory increased while retaining real-time capabilities. Extra memory capacity added to microprocessor without increasing memory address length and special transfer instructions by dedicating block of space in main memory to hold addresses of locations in extra memory.

**B83-10283
RADIO-FREQUENCY AND WIDEBAND MODULATION
ARRAYING**

M. H. BROCKMAN (CALTECH)

Apr. 1984

NPO-15030

Vol. 8, No. 1, P. 30

Summing network receives coherent signals from all receivers in array. Method sums narrow-band radio-frequency (RF) carrier powers and wide-band spectrum powers of array of separate antenna/receiver systems designed for phase-locked-loop or suppressed-carrier operation.

**B83-10284
IMPROVED COAL-THICKNESS MEASUREMENT**

T. A. BARR

Apr. 1984

MFS-23721

Vol. 8, No. 1, P. 30

Summed signals and dielectric-filled antenna improve measurement. Improved FM radar for measuring thickness of coal seam eliminates spectrum splitting and reduces magnitude of echo from front coal surface.

**B83-10285
PULSE RESPONSE YIELDS BATTERY CHARGE STATE**

C. P. CHAPMAN (CALTECH) and T. A. BARBER (CALTECH)

Apr. 1984

NPO-14882

Vol. 8, No. 1, P. 31

Response to input pulse characterizes state of charge of battery. Instrument electronically measures input and response of forcing-function pulse that periodically modulates charge or discharge current.

**B83-10286
AUTOMATIC CONTROL OF MULTIMEDIA SHOWS**

L. D. HOLLEY and J. P. STRODE

Apr. 1984

KSC-11080

Vol. 8, No. 1, P. 31

Audiovisual program synchronized digitally. Controller synchronizes over 60 events to two 16-millimeter movies regardless of speed variations in movie projectors.

**B83-10287
DIGITAL SAR PROCESSOR**

C. WU (CALTECH) and K. Y. LIU (CALTECH)

Apr. 1984

NPO-15519

Vol. 8, No. 1, P. 31

Produces real-time, single-look, high-resolution imagery. Digital synthetic-aperture-radar (SAR) processor achieves rate of 4 million samples per second. System combines frequency-domain and time-domain processing for two-dimensional azimuth correlation.

**B83-10288
ELECTRIC-POWER SYSTEM SIMULATOR**

R. W. CALDWELL (CALTECH), R. L. GRUMM (CALTECH), and B. L. BIEDEBACH (CALTECH)

Apr. 1984

NPO-15515

Vol. 8, No. 1, P. 31

Shows different combinations of generation, storage, and load components: display, video monitor with keyboard input to microprocessor, and video monitor for display of

load curves and power generation. Planning tool for electric utilities, regulatory agencies, and laymen in understanding basics of electric-power systems operation.

**B83-10289
CONNECTING SEPARATE COMPUTERS TO A COMMON
BUS**

A. K. AGRAWAN (CALTECH), P. G. MULLEN (CALTECH), and V. V. VADAKAN (CALTECH)

Apr. 1984

NPO-15433

Vol. 8, No. 1, P. 31

Network bus adapter (NBA) handles protocols for computer-to-computer communications. NBA does all protocol handling and communications with bus for its host computer, that processor of different speeds sends data to each other continuously at maximum speed. Any host can communicate with any other, or several or with all.

**B83-10290
FREQUENCY-DIVERSITY RECEPTION FOR PHASE MODULATION**

M. H. BROCKMAN (CALTECH)

Apr. 1984

NPO-15040

Vol. 8, No. 1, P. 32

Signal-to-noise ratio improved. System receives phase modulation transmitted simultaneously on different carrier frequencies. Used for carriers received through different antennas or through same antenna.

**B83-10291
ELIMINATING DOPPLER EFFECTS IN SYNTHETIC-
APERTURE RADAR OPTICAL PROCESSORS**

N. J. CONSTANTIDES (CALTECH) and T. J. BICKNELL (CALTECH)

Apr. 1984

NPO-14998

Vol. 8, No. 1, P. 32

Pair of photodetectors generates correction signals. Instrument detects Doppler shifts in radar and corrects processing parameters so ambiguities caused by shifts not manifested as double or overlapping images.

**B83-10292
ELECTRONICALLY-SCANNED FOURIER-TRANSFORM
SPECTROMETER**

J. B. BRECKINRIDGE (CALTECH) and F. G. OCALLAGHAN (CALTECH)

Apr. 1984

NPO-15844

Vol. 8, No. 1, P. 32

Instrument efficient, lightweight, and stable. Fourier-transform spectrometer configuration uses electronic, instead of mechanical, scanning. Configuration insensitive to vibration-induced sampling errors introduced into mechanically scanned systems.

**B83-10521
SELF-CHECKING MEMORY INTERFACE**

M. W. SIEVERS (CALTECH) and D. A. RENNELS (CALTECH)

Nov. 1984

NPO-15889

Vol. 8, No. 2, P. 179

Memory-interface integrated circuit not only detects errors in data from other circuits but also detects errors within itself. Memory-interface chip encodes 16-bit words with Hamming code for single-error correction or double-error detection. Chip used in fault-tolerant computers under development by NASA.

**B83-10522
SIDE-BAND-AIDED RECEIVER ARRAYS**

S. A. BUTMAN (CALTECH), L. J. DEUTSCH (CALTECH), and R. A. WINKELSTEIN (CALTECH)

Nov. 1984

NPO-15873

Vol. 8, No. 2, P. 180

Sideband-aided receiver arrays (SARA's) offer way of extracting greater energy per bit in radio data signals. 'Slave' receivers obtain modulation information from 'master'

02 ELECTRONIC SYSTEMS

receiver. Developed for reception of telemetry from vehicles in deep space, SARA concept applicable to commercial data-signal reception whenever two or more antennas are combined.

B83-10523 DETECTING DEFORMATIONS IN PHASED-ARRAY ANTENNAS

F. K. LI (CALTECH) and D. N. HELD (CALTECH)

Nov. 1984

NPO-15390

Vol. 8, No. 2, P. 181

Doppler technique detects deformation of large phased array radar antenna. Antenna electrically split into subarrays; individual phases measured when examination of antenna stability and provides information for correcting deformation.

B83-10524 AUTOMATIC PHASING FOR ACTIVE ANTENNA ELEMENTS

C. WU (CALTECH)

Nov. 1984

NPO-15920

Vol. 8, No. 2, P. 182

Automatic phasing system periodically interrupts antenna operation for calibration intervals and measures phase and amplitude response at each active antenna element. Using these measurements, system adjusts phase shift and possibly gain of active elements during operating intervals to give desired antenna-gain pattern.

B83-10525 INTERSTITIAL DIGITAL-IMAGE-POINT GENERATOR

T. R. EDWARDS

Nov. 1984

MFS-25871

Vol. 8, No. 2, P. 183

Resolution of digital imagery increased by calculating estimated values of intensity at coordinate points between original intensity-data points. Calculator implements algorithm that generates such interstitial points using four-by-four array of convolute integer coefficients. Coefficients multiplied by intensities at 16 original image points nearest each interstice to obtain weighted average intensity at each interstice.

B83-10526 UNMANNED INSTRUMENT PLATFORM FOR UNDERSEA EXPLORATION

G. PAINE (CALTECH), G. R. HANSEN (CALTECH), R. W. GULIZIA (CALTECH), and P. PALUZZI (CALTECH)

Nov. 1984

NPO-15878

Vol. 8, No. 2, P. 184

Instruments accommodated on moving underwater platform. Towable underwater platform 3.2 meters long, 1.2 meters wide, 1.4 meters high and has mass of about 1,250 kilogram. Platform remotely operated and unmanned. Serves as test bed for development of ocean-measuring instruments and sonars at depths to 20,000 feet.

B83-10527 ELIMINATING 'HOTSPOTS' IN DIGITAL IMAGE PROCESSING

P. M. SALOMON (CALTECH)

Nov. 1984

NPO-15684

Vol. 8, No. 2, P. 185

Signals from defective picture elements rejected. Image processing program for use with charge-coupled device (CCD) or other mosaic imager augmented with algorithm that compensates for common type of electronic defect. Algorithm prevents false interpretation of 'hotspots'. Used for robotics, image enhancement, image analysis and digital television.

B83-10528 DETECTION OF FLOATING INPUTS IN LOGIC CIRCUITS

B. CASH (Martin Marietta Corp.) and M. G. THORNTON (Martin Marietta Corp.)

Nov. 1984

LAR-13073

Vol. 8, No. 2, P. 185

Simple modification of oscilloscope probe allows easy detection of floating inputs or tristate outputs in digital-IC's. Oscilloscope probe easily modified with 1/4 W resistor and switch for detecting floating inputs in CMOS logic circuits.

B83-10529

DISPLAYING FORCE AND TORQUE OF A MANIPULATOR
A. K. BEJCZY (CALTECH), R. S. DOTSON (CALTECH), and H. C. PRIMUS (CALTECH)

Nov. 1984

NPO-15942

Vol. 8, No. 2, P. 186

Display combines bar charts, vector diagrams, and numerical values to inform operator of forces and torques exerted by end effector of manipulator. On voice or keyboard command, eight-channel strip-chart recorder traces force and torque components and claw position of raw measurements from eight strain gage sensors in end effector. Especially helpful when operator's view of end effector is obscured.

B83-10530

DITIGAL-IMAGE ENHANCEMENT

R. WOODS (University of Tennessee) and R. GONZALEZ (University of Tennessee)

Nov. 1984

MFS-25679

Vol. 8, No. 2, P. 187

Programmable system enhances digitally monocular and stereographic images at video rates. Provides automatic and interactive enhancement modes based on histogram modification and intensity-mapping techniques.

B83-10531

INSTRUMENTATION AND CONTROL FOR FOSSIL-ENERGY PROCESSES

A. MARK JR. (CALTECH)

Nov. 1984

NPO-15581

Vol. 8, No. 2, P. 187

Instrumentation and control requirements for fossil-energy processes discussed in working document. Published to foster advancement of instrumentation and control technology by making equipment suppliers and others aware of specifications, needs, and potential markets.

B83-10532

STATUS PANEL FOR VIDEO CASSETTE RECORDERS

G. L. TALLEY JR. (Information Systems Directorate) and D. R. HERBISON (Information Systems Directorate)

Nov. 1984

KSC-11254

Vol. 8, No. 2, P. 187

Central array of light-emitting diodes displays status of 30 video cassette recorders (VCR's) monitoring integrated testing of Space Shuttle. Remote status panel linked to VCR's by one 37-conductor cable. Transistor/ transistor logic chips in interface circuit allow LED array to function without drawing power from VCR control circuits.

B83-10533

CENTRAL CONTROL OF LOCAL OSCILLATOR FREQUENCIES

S. F. SMITH (University of Tennessee)

Nov. 1984

GSC-12804

Vol. 8, No. 2, P. 187

Central unit automatically controls frequencies of group of independent crystal-controlled low-power oscillators. Unit checks its own frequency against accurate frequency reference, such as station WWV and corrects its own timing circuit as necessary.

B83-10534

DEALLOCATING DEFECTIVE SPACE ON WINCHESTER DISKS

W. KING JR. (IBM Corp.)

Nov. 1984

KSC-11287

Vol. 8, No. 2, P. 188

Method given for locating and deallocating defective

sectors or tracks in Winchester-disk system partitioned into two regions, one for each of two operating systems (OS). First is real-time (on-line) OS, second is diagnostic (off-line) OS.

**B83-10535
DISPLAY FOR MINING-MACHINE OPERATORS**

P. PAULSON (Adjunct Technologies, Inc.)

Nov. 1984

MFS-25955 Vol. 8, No. 2, P. 188

Electronic display unit provides operator of longwall shearer with information needed to control machine. Unit samples sensors on shearer. Using sensor signals, executes mathematical calculations, performs decisionmaking routines and displays results to operator. Unit also logs data for later analysis.

**B83-10536
DETERMINING THE NONLINEARITY OF MICROWAVE RECEIVERS**

C. T. STELZRIED (CALTECH) and J. E. OHLSON (CALTECH)

Nov. 1984

NPO-15355 Vol. 8, No. 2, P. 188

Nonlinearity of microwave receiver measured and automatically corrected for by noise-adding radiometer built into microwave receiving circuit. Radiometer includes noise-adding diode, turned on and off by computer controlled processor.

**B83-10537
ESTIMATING EFFECTS OF FLICKER NOISE IN CLOCK SIGNALS**

S. C. WU (CALTECH)

Nov. 1984

NPO-15525 Vol. 8, No. 2, P. 188

Two techniques mathematically estimate effects of flicker noise in pulse trains used as clock signals.

**B83-10538
HARDWARE FAULT SIMULATOR GENERATES TEST VECTORS FOR COMPLEX IC'S**

C. C. TIMOC (CALTECH), L. M. HESS (CALTECH), and F. R. STOTT (CALTECH)

Nov. 1984

NPO-15362 Vol. 8, No. 2, P. 188

Report describes technique using fault simulator implemented entirely in hardware to generate and optimize test vectors for microprocessor. Hardware fault simulator approach reduces test time, while maintaining high reliability in detecting faults.

03 PHYSICAL SCIENCES

**B83-10019
FABRICATING GRATING COUPLERS ON OPTICAL FIBERS**

C. R. CHUBB (McDonnell Douglas Corp.), J. K. POWERS (McDonnell Douglas Corp.), and D. A. BRYAN (McDonnell Douglas Corp.)

Aug. 1983

MSC-20286 Vol. 7, No. 3, P. 263

Microscopic corrugations form on fiber surfaces. Grating couplers couple signals into and out of single-mode optical waveguides without requiring precise alignment of components, although in-service efficiency has yet to be verified.

**B83-10020
IMPROVED CATTLE HAULER**

E. J. SALTZMAN

Aug. 1983

FRC-11058

Vol. 7, No. 3, P. 265

Better aerodynamics and ventilation increases fuel efficiency and decreases shipping losses. Trailer is ventilated and cooled by inlet ports in front of rig and outlet ports in middle and rear. Rounded cab and fairing reduce drag by creating an attached airflow.

**B83-10021
CHARGED PARTICLE FLUX SENSOR**

D. A. GREGORY and C. D. STOCKS

Aug. 1983

MFS-25461

Vol. 7, No. 3, P. 265

Improved version of Faraday cup increases accuracy of measurements of flux density of charged particles incident along axis through collection aperture. Geometry of cone-and-sensing cup combination assures most particles are trapped.

**B83-10022
LENSELESS SCANNING TELESCOPE**

H. B. EDWARDS

Aug. 1983

LAH-12648

Vol. 7, No. 3, P. 266

Dual-aperture device minimizes aliasing. Radiometer scans at right angles to line of flight, giving complete coverage from horizon to horizon. Configurations include use of detector as inner aperture or use of concentrating lens in or behind inner aperture to image outer aperture on smaller detector.

**B83-10023
PRECISE MEASUREMENT OF EFFECTIVE FOCAL LENGTH**

T. D. WISE (Hughes Aircraft Co.) and J. B. YOUNG (Hughes Aircraft Co.)

Aug. 1983

GSC-12745

Vol. 7, No. 3, P. 267

Computerized instrument measures effective focal lengths to 0.01 percent accuracy. Laser interferometers measure mirror angle and stage coordinate y in instrument for accurate measurement of focal properties of optical systems. Operates under computer control to measure effective focal length, focal surface shape, modulation transfer function, and astigmatism.

**B83-10024
COOLING BY PARA-TO-ORTHO-HYDROGEN CONVERSION**

A. SHERMAN and T. NAST (Lockheed Corp.)

Aug. 1983

GSC-12770

Vol. 7, No. 3, P. 268

Catalyst speeds conversion, increasing capacity of solid hydrogen cooling system. In radial-flow catalytic converter, para-hydrogen is converted to equilibrium mixture of para-hydrogen and ortho-hydrogen as it passes through porous cylinder of catalyst. Addition of catalyst increases capacity of hydrogen sublimation cooling systems for radiation detectors.

**B83-10025
SUBMILLISECOND OPTICAL KNIFE-EDGE TESTING**

P. THURLOW (Hughes Aircraft Co.)

Aug. 1983

GSC-12740

Vol. 7, No. 3, P. 269

Fast computer-controlled sampling of optical knife-edge response (KER) signal increases accuracy of optical system aberration measurement. Submicrosecond-response detectors in optical focal plane convert optical signals to electrical signals converted to digital data, sampled and feed into computer for storage and subsequent analysis. Optical data are virtually free of effects of index-of-refraction gradients.

03 PHYSICAL SCIENCES

B83-10026

DETERMINING THE POINT OF ZERO ZETA POTENTIAL IN SOLID SAMPLES

C. E. BYVIK and B. REICHMAN (Christopher Newport College)

Aug. 1983

LAR-12893

Vol. 7, No. 3, P. 270

Technique for measuring pzzp in solid samples incorporates sample in photochemical cell and measures temperature dependence of flatband potential. Pzzp is obtained from slope of best straight line through measured points. Tests agree well with expected values. In technique sample does not have to be in powder form.

B83-10027

VIEWER MAKES RADIOACTIVITY 'VISIBLE'

L. I. YIN

Aug. 1983

GSC-12640

Vol. 7, No. 3, P. 271

Battery operated viewer demonstrates feasibility of generating three-dimensional visible light simulations of objects that emit X-ray or gamma rays. Ray paths are traced for two pinhole positions to show location of reconstructed image. Images formed by pinholes are converted to intensified visible-light images. Applications range from radioactivity contamination surveys to monitoring radioisotope absorption in tumors.

B83-10028

BEAM SPLITTER INTRODUCES LITTLE ABERRATION

N. L. EVANS JR. (CALTECH)

Aug. 1983

NPO-15580

Vol. 7, No. 3, P. 272

Placing beam splitter inside existing lens minimizes aberrations. Six channel beam splitter has optical paths of lengths equal to distances traveled by rays. Lens element cemented to each of exit faces of beam splitter is optically concentric with element cemented to entrance face and with center of curvature of monocentric optical system. Beam splitter makes it possible to form separate image in each wavelength channel of interest.

B83-10029

OPTICAL-FIBER-TO-CHANNEL-WAVEGUIDE COUPLER

G. O. RAMER (Hughes Aircraft Co.)

Aug. 1983

NPO-15555

Vol. 7, No. 3, P. 273

Holding device made by etching V-shaped grooves in silicon in coupler close tolerances are achieved for high-efficiency coupling between optical fibers with core diameter of 5 μ m and 110 μ m in cross section. Fibers are held in V-shaped grooves on silicon chips.

B83-10030

CONTROLLING INDUSTRIAL NOISE

Innovator Not Given (The Bionetics Corp.)

Aug. 1983 See Also NASA SP-5108 (N82-11858/NSP)

LAR-13001

Vol. 7, No. 3, P. 273

Handbook gives basic comprehensive information on noise in industrial environments. Intended to aid engineers in understanding measuring and controlling noise whether or not they have experiences in acoustics.

B83-10140

ACOUSTIC EMISSIONS REVEAL COMBUSTION CONDITIONS

D. N. R. RAMOHALLI (Caltech) and P. K. SESHAN (Caltech)

Oct. 1983

NPO-15699

Vol. 7, No. 4, P. 369

Turbulent-flame acoustic emissions change with air/fuel ratio variations. Acoustic emissions sensed and processed to detect inefficient operation; control system responds by adjusting fuel/air mixture for greater efficiency. Useful for diagnosis of combustion processes and fuel/air control.

B83-10141

ELECTRON BEAM COULD PROBE RECOMBINATION CENTERS

O. VONROOS (CALTECH)

Oct. 1983

NPO-15285

Vol. 7, No. 4, P. 390

Electron beam probe technique estimate electron/hole capture cross sections in semiconductors with wide band gaps. Amplitude-modulated electron beam induces short-circuit current collected by ohmic contacts. Phase shift between this current and electron-beam current measured as function of frequency. Results of measurements used to ascertain recombination rates and energy levels.

B83-10142

SELF-MODULATED LASER RANGEFINDER

J. B. ABSHIRE

Oct. 1983

GSC-12761

Vol. 7, No. 4, P. 391

Longitudinal resonance modes exploited. Self-modulated-laser ranging system exploits presence of signals differing in frequency by longitudinal mode separation frequency fm. Two square-law photodetectors have outputs modulated by fm, and phase difference between two outputs is related to target distance. Laser transmitter/receiver measures distances as well as displacements of distant objects (such as vibrating buildings).

B83-10143

PYRHELIOMETER WITH IMPROVED ACCURACY

R. S. ESTEY (CALTECH) and M. F. HANNA (CALTECH)

Oct. 1983

NPO-15398

Vol. 7, No. 4, P. 393

Instrument maintains components at constant temperature and allows tenfold improvement in instrumental accuracy. Two units make up improved pyreheliometer. Radiometer absorbs radiant energy and generates electrical signal. Control unit, which incorporates improvements, provides amplifiers, controls, and calibration circuits. Instrument 10 times more accurate than previous sion.

B83-10144

ESTIMATING WAVEGUIDE FEED DIRECTIVITY AND SPACING

Y. RAHMAT-SAMII (CALTECH), P. W. CRAMER (CALTECH), K. E. WOO (CALTECH), and S. W. LEE (CALTECH)

Oct. 1983

NPO-15603

Vol. 7, No. 4, P. 393

Approximate curves simplify initial steps of antenna design. Maximum achievable directivity exponents plotted as functions of element spacing in wavelengths for equilateral triangular array of rectangular waveguides. Directivities and exponents calculated for circular waveguides, pyramidal horns, and other standard feeds. Designer quickly estimates element spacing necessary to achieve required directivity or directivity achievable.

B83-10145

NORMAL-INCIDENCE SOFT-X-RAY MIRROR

J. H. UNDERWOOD (CALTECH) and T. W. BARBEE JR. (Stanford)

Oct. 1983

NPO-15828

Vol. 7, No. 4, P. 394

Multilayered interference structure has about 6 percent reflectivity. Normal-incidence X-Ray Mirror, bent into spherical surface of radius 1.1mm used to image electroformed-nickel grid onto photographic film sensitive to soft X-rays. Grid set at distance of 1,067 mm from mirror, illuminated by simple Coolidge-type X-ray tube with carbon anode operated from 1.5KV supply. Film set at distance of 1,186 mm from mirror with resultant magnification of 1.11.

B83-10146

MULTISPECTRAL DUAL-APERTURE SCHMIDT OBJECTIVE

P. O. MINOTT

Oct. 1983

GSC-12756**Vol. 7, No. 4, P. 395**

Off-axis focal planes make room for beam splitters. System includes two off-axis primary spherical reflectors, each concentric with refractive corrector at aperture. Off-axis design assures large aperture required for adequate spatial resolution. Separate images have precise registration, used for multispectral resource mapping or remote sensing.

B83-10147

GRATING DEMULTIPLEXERS FOR OPTICAL SIGNALS
E. MAROM (Hughes Aircraft Co.) and O. G. RAMER (Hughes Aircraft Co.)

Oct. 1983

LAR-12748 AND LAR-12749**Vol. 7, No. 4, P. 397**

Two systems proposed to increase wavelength resolution. Two paraboloidal reflectors and grating separate light into component colors. First paraboloid forms input light into nearly planar waves. Reflected from planar grating at various angles depending on wavelength. Second paraboloid focuses separate wavelengths to separate lines.

B83-10148

FUSE PROTECTS PARABOLIC-DISH SOLAR COLLECTOR

M. K. SELCUK (Caltech)

Oct. 1983

NPO-15662**Vol. 7, No. 4, P. 397**

Sliding barrel and shutter protect against overheating. Downward movement of shutter initiated by melting of fuse wire that suspends it. Shutter lowered or raised under operator's control by depressuring or pressurizing hydraulic cylinder.

B83-10149

COST EFFECTIVENESS OF HYBRID SOLAR POWER-PLANTS

L. C. WEN (Caltech) and H. L. STEELE (Caltech)

Oct. 1983

NPO-15735**Vol. 7, No. 4, P. 398**

Report discusses cost effectiveness of high-temperature thermal storage system for representative parabolic dish solar powerplant. Economic viability of thermal storage system assessed; cost and performance projections made; cost of electricity generated by solar power plant also calculated.

B83-10150

SOLAR-POND RESOURCES IN THE UNITED STATES

M. G. HURICK (Caltech)

Oct. 1983

NPO-15681**Vol. 7, No. 4, P. 398**

Report describes survey of U.S. salt and brine deposits providing essential information for developers considering use of solar ponds for heat and electricity production. Sites classified as areas of ponds about 1 km², or larger, accommodated in which salt, clay, and water are available.

B83-10293

COMPACT CONCENTRATORS FOR SOLAR CELLS

V. S. WHANG (TRW, Inc.)

Apr. 1984

MFS-25511**Vol. 8, No. 1, P. 35**

Each cell in array has own concentrator. A Cassegrain Reflector combination of paraboloidal and hyperboloidal mirrors-used with conical reflector at each element of array. Three components direct light to small solar cell. No cooling fins, fans, pumps, or heat pipes needed, not even in vacuum.

B83-10294

TESTING LARGE SOLAR MIRRORS

M. J. ARGOUD (CALTECH), W. L. WALKER (CALTECH), R. S. LELAND (CALTECH), L. V. BUTLER (CALTECH), and E. W. DENNISON (CALTECH)

Apr. 1984

NPO-15404**Vol. 8, No. 1, P. 36**

Mirror figure evaluated in terms of imaging properties. Equipment includes scanner for measuring irradiance distribution in solar image produced by gore and camera equipped with special apertures for determining magnitude and location of figure errors on gores.

B83-10295

TWO-STAGE OFF-AXIS CYLINDRICAL SOLAR CONCENTRATOR

R. WINSTON (University of Chicago), J. J. OGALLAGHER (University of Chicago), W. T. WELFORD (University of London), and D. E. ROCKEY (CALTECH)

Apr. 1984

NPO-15484**Vol. 8, No. 1, P. 37**

Concentrator uses off-axis geometry to achieve efficient uniform illumination of photovoltaic cells. Primary reflector is parabolic cylinder and therefore readily adaptable to rolling up for transport and unrolling for deployment. Foldable cylindrical structure has potential for both terrestrial and space applications.

B83-10296

CONTACTLESS MEASUREMENT OF PHYSICAL PROPERTIES

D. D. ELLEMAN (CALTECH), T. G. WANG (CALTECH), E. H. TRINH (CALTECH), and A. CROONQUIST (CALTECH)

Apr. 1984

NPO-15839**Vol. 8, No. 1, P. 38**

Surface tension and other properties determined from measurement of resonant frequency. Surface tension and other physical properties of molten and liquid samples excited at resonance measured by observing photographic or TV image and noting resonant frequency and rate of change. Technique used in normal gravity and low gravity in either vacuum or gaseous environment, where sample is positioned by electrostatic, acoustic, or magnetic forces.

B83-10297

DRYING MILK WITH BOILER EXHAUST

M. R. BROUSSARD (CALTECH)

Apr. 1984

NPO-15923**Vol. 8, No. 1, P. 39**

Considerable energy saved in powdered-milk industry. Only special requirement boiler fired with natural gas or other clean fuel. Boiler flue gas fed to spray drier where it directly contacts product to be dried. Additional heat supplied by auxiliary combustor when boiler output is low. Approach adaptable to existing plants with minimal investment because most already equipped with natural-gas-fired boilers.

B83-10298

HYDROGEN MASERS AS TIME AND FREQUENCY STANDARDS

S. C. WARD (CALTECH)

Apr. 1984

NPO-15858**Vol. 8, No. 1, P. 39**

Track each other with 100 times more precision than cesium standards. Geographically separated hydrogen masers tracked each other for more than year to within few parts in 10 to the 15th power. Frequency offset of hydrogen-maser output from hyperfine line frequency is function of ambient magnetic field, cavity mistuning, thermal motion of atoms in cavity and collisions of atoms with walls of the cavity. If maser remains at one location some of small offsets in frequency will remain constant throughout life of maser.

B83-10299

FLUID/VAPOR SEPARATOR FOR VARIABLE FLOW RATES

J. M. LEE (UCLA), C. CHUANG (UCLA), T. H. FREDERKING (UCLA), G. S. BROWN (UCLA), Y. KAMIOKA (UCLA), and J. VORREITER

Apr. 1984

ARC-11401**Vol. 8, No. 1, P. 40**

Shutter varies gas throughput of porous plug. Variable

03 PHYSICAL SCIENCES

area exposed on porous plug allows to pass varying rates of vapor flow while blocking flow of liquid helium II from cryogenic bath. Applications in refining operations, industrial chemistry, and steam-powered equipment.

B83-10300 COMPUTATION OF BRAGG REFLECTION FOR LAYERED MICROSTRUCTURES

J. W. UNDERWOOD (CALTECH) and T. W. BARBEE (CALTECH)
Apr. 1984

NPO-15880

Vol. 8, No. 1, P. 41

Bragg diffractors analyzed for use in X-ray mirrors and other applications. SLM tailored to specific applications by varying layer thicknesses and number of layers to control reflectivity diffraction width, and wavelength resolution. Applications as glancing incidence mirrors or filters for wavelengths of few to few hundred angstroms.

B83-10301 HOLOGRAPHIC TWYMAN-GREEN INTERFEROMETER C. W. CHEN (CALTECH), J. C. WYANT (CALTECH), and J. B. BRECKINRIDGE (CALTECH)

Apr. 1984

NPO-15754

Vol. 8, No. 1, P. 42

Off-axis Fresnel zone plate used to obtain fringe visibility close to unity. Holographic Twyman-Green Interferometer (HTG) employs off-axis Fresnel zone plate (OFZP) as beam splitter and beam diverger in place of two separate elements that perform those functions in conventional Twyman-Green interferometer.

B83-10302 IMPROVED ELECTROSTATIC OPTICAL SYSTEM

B. F. LEWIS (CALTECH)

Apr. 1984

NPO-15774

Vol. 8, No. 1, P. 43

Device suitable for molecular epitaxial formation of semiconductor components. Improved electrostatic lens system uses cylindrical mirror as central element between two tubular lenses. Abberations introduced by mirror tend to cancel those introduced by tubular lenses. Result is order-of-magnitude improvement in chromatic or spherical compensation.

B83-10303 LEAST-SQUARES PREDICTION OF SOLAR ACTIVITY R. L. HOLLAND, C. RHODES, and H. C. EULER JR.

Apr. 1984 See Also NASA TM-8242 (N82-27221/NSP)

MFS-25870

Vol. 8, No. 1, P. 44

Studies of statistical methods for predicting future solar activity described in report containing extensive graphical and tabular presentations of analyses. Lagrangian-least-squares method, which gives best predictions presented in detail. FORTRAN source code for method given.

B83-10304 SOLAR HEATING AND COOLING DEVELOPMENT PROGRAM

R. AAEN (Honeywell Technology Strategy Center) and A. GOSSLER (Honeywell Technology Strategy Center)

Apr. 1984

MFS-27015

Vol. 8, No. 1, P. 44

Heating is practical now, but cooling needs more development. Report describes program for design and development of solar heating and cooling systems having high performance, low cost and modular application. Describes main technical features of each of systems. Presents summary of performance and costs.

B83-10305 DESIGNING FLAT-PLATE PHOTOVOLTAIC ARRAYS R. G. ROSS JR. (CALTECH)

Apr. 1984

NPO-15729

Vol. 8, No. 1, P. 45

Report presents overview of state of art in design

techniques for flat-plate solar photovoltaic modules and arrays. Paper discusses design requirements, design analyses, and test methods identified and developed for this technology over past several years in effort to reduce cost and improve utility and reliability for broad spectrum of terrestrial applications.

B83-10306 MULTIPLE-WAVELENGTH METAL/HALIDE LASER

N. M. NERHEIM (CALTECH)

Apr. 1984

NPO-15256

Vol. 8, No. 1, P. 45

Single device produces multiple lasing lines. Laser capable of producing many lasing lines has several reservoirs of halide lasant mixed with chlorides of copper, manganese and iron. Convection-control technique possible to rapidly change from one metal halide to another at maximum energy.

B83-10307 SCANNING XECL LASER

J. B. LAUDENSLAGER (CALTECH), T. J. PACALA (CALTECH), and I. S. MCDERMID (CALTECH)

Apr. 1984

NPO-15692

Vol. 8, No. 1, P. 45

Applications of narrow-bandwidth laser include remote sensing and high-resolution spectroscopy. Scanning XeCl oscillator/ring-laser amplifier produces narrow spectral bandwidth (less than 0.003nm) over tuning range of 307.5 to 308.5 nm. Ring configuration has following advantages: oscillator decoupled from amplifier, output unidirectional, output beam uniform and inexpensive optics allow variable output coupling and cavity length.

B83-10308 SIMPLIFIED LASER TUNING

I. S. MCDERMID (CALTECH) and T. J. PACALA (CALTECH)

Apr. 1984

NPO-15690

Vol. 8, No. 1, P. 45

Tuning arrangement employs single grating and two planar mirrors. Arrangement of front-surface mirrors and single holographic grating significantly reduces spectral bandwidth and simplified tuning of laser output. Laser used to induce fluorescence in measuring concentrations of trace species, such as OH radical, in atmosphere.

B83-10309 OBTAINING PULSES FROM A CW LASER

J. S. MARGOLIS (CALTECH)

Apr. 1984

NPO-15111

Vol. 8, No. 1, P. 46

Two acousto-optic modulators operate in tandem. System generates pulses from output of continuous wave laser. Duration and repetition rate of pulses controlled.

B83-10310 CONTROLLING METAL-HALIDE VAPOR DENSITY IN LASERS

T. J. PIVIROTTO (CALTECH)

Apr. 1984

NPO-15021

Vol. 8, No. 1, P. 46

Streams of buffer gas convect and dilute metal-halide vapor. Technique uses flow of buffer gas through reservoir, which contains heated metal halide, to convect vapors into discharge tube. Second stream of buffer gas dilutes vapor. Final vapor density in laser tube controlled and changed by adjusting either one or both of buffer gas flow rates.

B83-10311 FLUORINE MIXER/VAPORIZER FOR CHEMICAL LASERS A. GIANDOMENICO (CALTECH)

Apr. 1984

NPO-15552

Vol. 8, No. 1, P. 46

A mixer/vaporized chamber gasifies liquid fluorine before

It is injected into lasing cavity of hydrogen fluoride/deuterium fluoride laser. Fluorine vaporized by flow of helium.

**B83-10312
IMPROVED LASER VELOCIMETER**

L. O. HEFLINGER (TRW, Inc.)

Apr. 1984

MFS-25465

Vol. 8, No. 1, P. 46

Self-aligning laser velocimeter uses simple lenses and Doppler frequency shift by scattering disk to monitor fluid motion in three dimensions.

**B83-10313
SOLAR-COLLECTOR RADIOMETER**

J. M. KENDALL SR. (CALTECH)

Apr. 1984

NPO-14986

Vol. 8, No. 1, P. 46

Water-cooled Kendall radiometer measures output of solar energy concentrators. Unit measures irradiance up to 30,000 solar constants with 1 percent accuracy and responds to wavelengths from ultraviolet to far infrared.

**B83-10314
CERAMIC SOLAR RECEIVER**

C. ROBERTSON JR. (General Electric Co.)

Apr. 1984

NPO-15769

Vol. 8, No. 1, P. 46

Solar receiver uses ceramic honeycomb matrix to absorb heat from Sun and transfer it to working fluid at temperatures of 1,095 degrees and 1,650 degrees C. Drives gas turbine engine or provides heat for industrial processes.

**B83-10315
BRICKS AND CANS FOR THERMAL STORAGE**

H. SAHA (Alabama A & M University)

Apr. 1984

MFS-25625

Vol. 8, No. 1, P. 47

Water-filled cans and bricks provide efficient thermal storage for solar space and hot-water heating. Tests indicate thermal storage mediums suitable in both passive and active solar heating systems.

**B83-10316
TWO-FLUID SOLAR POND**

F. L. LANSING (CALTECH)

Apr. 1984

NPO-15419

Vol. 8, No. 1, P. 47

Plastic covered solar pond uses two immiscible liquids of different densities to collect and store solar energy.

**B83-10317
EFFECTS OF OUTDOOR SOILING ON PHOTOVOLTAIC MODULES**

A. R. HOFFMAN (CALTECH) and C. R. MAAG JR. (CALTECH)

Apr. 1984

NPO-15186

Vol. 8, No. 1, P. 47

Airborne contaminants degrade module performances. Report describes experiments to understand effects of airborne contaminants on sensitive surfaces of photovoltaic modules.

**B83-10318
EFFECT OF TEMPERATURE ON FIBER-OPTIC DELAY**

L. A. BERGMAN (CALTECH), S. T. ENG (CALTECH), A. R. JOHNSTON (CALTECH), and G. F. LUTES (CALTECH)

Apr. 1984

NPO-15148

Vol. 8, No. 1, P. 47

Fiber/jacket interactions affect performance. Attenuation and phase measurements made to assess effect of temperature on signal delay and attenuation in two fiber-optic cable samples.

**B83-10319
STABILIZING FIBER-OPTIC TRANSMISSION LINES**

G. F. LUTES (CALTECH) and K. Y. LAU (CALTECH)

Apr. 1984

NPO-15036

Vol. 8, No. 1, P. 47

Voltage-controlled optical phase shifter is key. Optical phase shifter stabilizes propagation delay of fiber-optic transmission line by compensating for temperature and pressure effects. Applicable to phased array antenna systems and very-long-baseline interferometer distribution systems.

**B83-10320
IONIC REFRIGERATOR**

R. RICHTER (CALTECH)

Apr. 1984

NPO-15288

Vol. 8, No. 1, P. 48

With no moving parts, proposed refrigerator has long life. Thermal energy of refrigeration process transported by hydrogen ions that go through three phase changes in absorbing heat and three phase changes in dissipating heat.

**B83-10321
ESTIMATING THE SOLUBILITY OF GASES IN BATTERY ELECTROLYTES**

D. D. LAWSON (CALTECH) and H. A. FRANK (CALTECH)

Apr. 1984

NPO-15610

Vol. 8, No. 1, P. 48

Estimates in excellent agreement with experimental values. Simple method proposed for estimating solubility of gases in electrolytes of lithium batteries using expressions for energy of vaporization and for molar volume.

**B83-10322
EVAPORATION TOWER WITH PRILL NOZZLES**

E. R. DU FRESNE (CALTECH)

Apr. 1984

NPO-15609

Vol. 8, No. 1, P. 48

Tower more efficient than conventional evaporation equipment. Liquids such as milk and fruit juice concentrated by passing them through tiny nozzle to form droplets, then allowing droplets to fall through evacuated tower with cooled walls.

**B83-10323
ACCELERATED SOLAR-UV TEST CHAMBER**

A. GUPTA (CALTECH) and E. G. LAUE (CALTECH)

Apr. 1984

NPO-15063

Vol. 8, No. 1, P. 48

Medium-pressure mercury-vapor lamps provide high ratio of ultraviolet to total power. Chamber for evaluating solar-ultraviolet (UV) radiation damage permits accelerated testing without overheating test specimens.

**B83-10324
IMAGING BUBBLE FORMATION IN A DROP TUBE**

R. HELIZON (CALTECH) and M. C. LEE (CALTECH)

Apr. 1984

NPO-15114

Vol. 8, No. 1, P. 48

Entire process under control of computer. Computer-controlled image-acquisition system tracks object, such as water bubble, as it moves in drop tube. Ultimately, such tracking system used to observe fusion-pellet concentration in drop furnace.

**B83-10325
MICROWAVE RADIATION DETECTOR**

J. R. LESH (CALTECH)

Apr. 1984

NPO-15932

Vol. 8, No. 1, P. 48

Direct photon detector responds to microwave frequencies. Method based on trapped-ion frequency-generation standards proposed to detect radio-frequency (RF) radiation at 40.5 GHz. Technique used for direct detection (RF) communication, radar, and radio astronomy.

**B83-10539
IMPROVED GAMMA-AND X-RAY PINHOLE CAMERA**

L. I. YIN

03 PHYSICAL SCIENCES

Nov. 1984

GSC-12851

Vol. 8, No. 2, P. 191

Electronic additions increase image quality. Digital image-processing equipment electronically performs functions of S1 and D2 improving resolution and adding capability for image storage and further processing. System useful in nuclear medicine or radioisotope imaging, tomography and nuclear industry.

B83-10540

ION ACCELERATOR MERGES SEVERAL BEAMS

G. ASTON (CALTECH)

Nov. 1984

NPO-15547

Vol. 8, No. 2, P. 192

Intense ion beam formed by merging multiple ion beamlets into one concentrated beam. Beamlet holes in graphite screen and focusing grids arranged in hexagonal pattern. Merged beam passes through single hole in each of aluminum accelerator and decelerator grids. Ion extraction efficiency, beam intensity, and focusing improved.

B83-10541

NEUTRON PROBE OF BUILDING-WALL COMPOSITION

J. I. TROMBKA and L. G. EVANS (Computer Sciences Corp.)

Nov. 1984

GSC-12808

Vol. 8, No. 2, P. 193

Walls of historic buildings charted by neutron radiography. Neutron source and Gamma-Ray Detector aligned with each other yield map of composition of wall. Points spaced for minimal overlap based on mean free path of gamma rays emitted from wall materials. Map indicates nature and extent of changes in building materials so proper treatment is applied.

B83-10542

COLLECTING LIGHT FROM POINT IMAGES

W. C. GOSS (CALTECH), E. F. TUBBS (CALTECH), and J. G. COHEN (CALTECH)

Nov. 1984

NPO-15887

Vol. 8, No. 2, P. 194

Light from sources at varying positions brought to fixed opening. In telescope field divided into 10 strips, 10 pairs of optical fibers moved laterally and longitudinally to any required position in their assigned strips. Fixed ends of fibers arrayed in line at spectrograph entrance slit. Concept developed to enhance efficiency of spectrographs on astronomical telescopes.

B83-10543

IMAGING FLUID FLOW

W. K. WITHEROW

Nov. 1984

MFS-25897

Vol. 8, No. 2, P. 195

Electro-optical system allows simultaneous viewing of schlieren, shadowgraph and interferometric images of volume of fluid under test. In imaging system cube beam splitters replaced by plate-type beam splitters or pellicle beam splitters.

B83-10544

VISUAL ALINEMENT TECHNIQUE FOR INFRARED LIDAR

R. T. MENZIES (CALTECH) and U. P. OPPENHEIM (CALTECH)

Nov. 1984

NPO-15826

Vol. 8, No. 2, P. 196

Visible He/Ne laser beam substituted for invisible CO2 beam during alignment. System accomplished visually by using low-power He/Ne laser previously adjusted to visible beam parallel to invisible infrared CO2 laser beam. Method used to align adjacent telescopes in other optical systems.

B83-10545

AIRFLOW ASSISTS SOLAR RECEIVER

W. R. REVERE (CALTECH) and E. A. LAUMANN (CALTECH)

Nov. 1984

NPO-15784

Vol. 8, No. 2, P. 196

Heat loss by convection reduced. Simplified solar receiver concept involves inwardly directed flow of cooling air and 'air door' to reduce loss by convection. Receiver is constructed from inexpensive materials.

B83-10546

SUN TRACKER OPERATES A YEAR BETWEEN CALIBRATIONS

C. M. BERDAHL (CALTECH)

Nov. 1984

NPO-15810

Vol. 8, No. 2, P. 197

Low-cost modification of Sun tracker automatically compensates equation of time and seasonal variations in declination of Sun. Output of Scotch Yoke drive mechanism adjusted through proper sizing of crank, yoke and other components and through choice of gear ratios to approximate seasonal north and south motion of Sun. Used for industrial solar-energy monitoring and in remote meteorological stations.

B83-10547

ACOUSTIC IMAGING OF COMBUSTION NOISE

K. N. RAMOHALLI (CALTECH) and P. K. SESHAN (CALTECH)

Dec. 1984

NPO-15698

Vol. 8, No. 2, P. 198

Ellipsoidal acoustic mirror used to measure sound emitted at discrete points in burning turbulent jets. Mirror deemphasizes sources close to target source and excludes sources far from target. At acoustic frequency of 20 kHz, mirror resolves sound from region 1.25 cm wide. Currently used by NASA for research on jet flames. Produces clearly identifiable and measurable variation of acoustic spectral intensities along length of flame. Utilized in variety of monitoring or control systems involving flames or other reacting flows.

B83-10548

ION ENGINE WITH SOLID-ELECTROLYTE ION GENERATOR

R. RICHTER (CALTECH)

Nov. 1984

NPO-15809

Vol. 8, No. 2, P. 199

Working fluid utilized efficiently. Working fluid positive ions conducted through solid electrolyte to outside, then accelerated in external electric field. While in solid-electrolyte material, ions do not recombine with electrons: transported to surface with high ionization efficiency. Provides new way to generate beam of ions for implantation in semiconductors or other applications.

B83-10549

AIR-CONDITIONING FOR ELECTRIC VEHICLES

Z. POPINSKI (CALTECH)

Nov. 1984

NPO-15183

Vol. 8, No. 2, P. 199

Combination of ammonia-absorption refrigerator, roof-mounted solar collectors, and 200 degrees C service electric-vehicle motor provides evaporative space-heating/space cooling system for electric-powered and hybrid fuel/electric vehicles.

B83-10550

CONTROLLING TV-CAMERA F-STOP REMOTELY

G. L. TALLEY JR., D. R. HERBISON, and G. F. ROUTH

Nov. 1984

KSC-11269

Vol. 8, No. 2, P. 200

Lens opening of television camera controlled manually from remote location by simple and inexpensive data link without modifications to camera lens system. Allows closeup views of wide-brightness-range events otherwise hazardous for human operator.

B83-10551

HIGH-RESOLUTION X-RAY TELESCOPE

J. M. DAVIS (American Science & Engineering, Inc.), R. C. CHASE (American Science & Engineering, Inc.), and J. H. UNDERWOOD (CALTECH)
Nov. 1984

NPO-15971 Vol. 8, No. 2, P. 200

X-ray telescope for mapping celestial X-ray sources from locations in space uses secondary mirror to magnify images formed by primary mirror. Secondary mirror with hyperboloid/hyperboloid surface located at focal plane of primary mirror.

**B83-10552
IMPROVED INFRARED MULTISPECTRAL SCANNER**

C. G. STANICH (Daedalus Enterprises, Inc.) and F. G. OSTERWISCH (Daedalus Enterprises, Inc.)
Nov. 1984

NPO-16143 Vol. 8, No. 2, P. 200

Spectrometer scan head redesigned to accommodate larger spectrometer and two blackbody reference sources while remaining within space limitations of its aircraft mounting.

**B83-10553
LENSELESS IMAGE SCANNER**

R. A. SCHINDLER (CALTECH)

Nov. 1984

NPO-16004 Vol. 8, No. 2, P. 200

Image scanner uses moving and stationary parallel slits to produce pictures of visible, infrared, X-ray microwave, or acoustic sources. No lenses or mirrors required. Single detector views all parts of image simultaneously rather than raster making relatively-short exposure times possible. Potential applications of system include medical x-ray imaging.

**B83-10554
OPTICAL MEASUREMENT OF PARTICLE SIZE AND VELOCITY**

J. L. SMITH

Nov. 1984

MFS-27036 Vol. 8, No. 2, P. 200

Dual-beam laser-Doppler anemometers simultaneously determine velocity and size distribution of particles in flowing fluid.

**B83-10555
IMPROVED HOLLOW CATHODE**

G. ASTON (CALTECH)

Nov. 1984

NPO-15560 Vol. 8, No. 2, P. 200

Improved hollow cathode for neutral-beam injector ion sources rapidly started by dielectric breakdown of ignitor plug located at one end of open ended tube. Used in low-current ion implantation, milling, sputtering, and bombardment for surface treatment.

**B83-10556
CATALOG OF SPECTRAL LINES**

R. L. POYNTER (CALTECH) and H. M. PICKETT (CALTECH)
Nov. 1984

NPO-15181 Vol. 8, No. 2, P. 201

Report describes computer accessible catalog of calculated and experimental spectral lines in frequency range between zero and 300 GHz for selected molecules, including chlorine oxide, bromine oxide, phosphine and oxygen.

**B83-10557
LASER-BEAM SEPARATOR**

I. S. MCDERMID (CALTECH)

Nov. 1984

NPO-15723 Vol. 8, No. 2, P. 201

Train of prisms and optical stop separate fundamental beam of laser from second and higher order harmonics of beam produced in certain crystals and by stimulated Raman scattering in gases and liquids.

**B83-10558
MEASURING DELAY IN LASERS**

L. A. BERGMAN (CALTECH) and E. T. SVERRE (CALTECH)
Nov. 1984

NPO-15242 Vol. 8, No. 2, P. 201

Technique measures delay, i.e., response time of modulated diode laser as function of temperature by comparing excitation signal to laser output signal with vector voltmeter.

**B83-10559
LASER DIODE SCHLIEREN PHOTOGRAPHY**

J. M. FRANKE and A. W. BURNER JR.

Nov. 1984

LAR-12897 Vol. 8, No. 2, P. 201

Laser diodes preferable to conventional lasers or incandescent lamps for Schlieren flow analysis because they are smaller, more rugged, less costly and have lower power requirements.

**B83-10560
IMPROVED HEAT-ENGINE SOLAR-ENERGY SYSTEM**

D. C. MILLER (CALTECH)

Nov. 1984

NPO-15762 Vol. 8, No. 2, P. 201

Heat engine solar-energy system improved by installing overcapacity heat exchanger and buffer loop between engine fluid and solar heated fluid.

**B83-10561
PREDICTING SOLAR DEFICITS**

R. G. ROSS JR. (CALTECH) and C. C. GONZALEZ (CALTECH)

Nov. 1984

NPO-15667 Vol. 8, No. 2, P. 201

Statistical method uses available long term solar irradiance data at selected sites in United States to predict probable deviations from long term monthly averages. Technique useful in sizing solar collectors and backup storage systems to cover solar deficits.

**B83-10562
MODELING OF SOLAR CONCENTRATORS**

D. E. ROCKEY (CALTECH)

Nov. 1984

NPO-15034 Vol. 8, No. 2, P. 201

Algorithm developed for predicting power output, uniformity of intensity and operating temperature of concentrator-enhanced photovoltaic solar cell arrays. Optimum values for parameters such as reflector geometry found prior to constructing scale models for testing.

**B83-10563
SALTLESS SOLAR PONDS**

E. I. LIN (CALTECH)

Nov. 1984

NPO-15808 Vol. 8, No. 2, P. 202

Problems associated with heat storage in solar ponds eliminated by transparent insulating cover at surface of pond. Cover makes unnecessary salt gradient that suppresses natural convection within pond to promote thermal storage.

**B83-10564
PARABOLIC SOLAR COLLECTORS**

V. C. TRUSCELLO (CALTECH)

Nov. 1984

NPO-15674 Vol. 8, No. 2, P. 202

Paper presents tutorial overview of point focusing parabolic reflectors for solar-energy collectors. Optical and thermal characteristics of collectors discussed in detail.

**B83-10565
HIGH-TEMPERATURE HELICAL-TUBE SOLAR RECEIVER**

C. ROBERTSON JR. (General Electric Co.) and L. MCCREIGHT (General Electric Co.)

03 PHYSICAL SCIENCES

Nov. 1984

NPO-15768

Vol. 8, No. 2, P. 202

Solar-thermal receiver used with circular parabolic concentrator to supply about 58 kW thermal power to Brayton engine or industrial process. Solar radiation focused into open end of cylindrical ceramic thermal inertial sleeve 8 in. in diameter that reradiates energy to helical heat exchanger tube surrounding sleeve.

B83-10566

CONCENTRATOR-ENHANCED SOLAR ARRAY

B. J. MORSE (Hughes Aircraft Co.)

Nov. 1984

NPO-15628

Vol. 8, No. 2, P. 202

Deployable solar array for satellites uses slanted low-mass planar mirrors as walls of trough to triple light falling on GaAs solar cells forming bottom of trough. Power-to-mass ratio of new design 42 percent higher than planar array of same power output.

B83-10567

EFFICIENCY OF REFLECTION GRATINGS

C. W. CHEN (University of Arizona) and J. C. WYANT (University of Arizona)

Nov. 1984

NPO-15852

Vol. 8, No. 2, P. 202

Dichromated gelatin plates evaluated as optical elements for phase-volume holography.

04 MATERIALS

B83-10031

AROMATIC POLYIMIDES WITH GROUP VI LINKAGES

T. L. ST. CLAIR, H. D. BURKS, and R. M. ELY

Aug. 1983 See Also NASA TR-84494(N82-27493/NSP)

LAR-12980

Vol. 7, No. 3, P. 277

New polymer system combines thermal and solvent resistant properties of aromatic polyimides with processability of PPX polymers. PPX polymers include polyphenylene oxide, polyphenylene sulfide, and polyphenylene sulfone classes. Generally more processable by hot melt or thermoplastic techniques than aromatic polyimides. PPX systems more susceptible to attack by solvents and have lower glass transition temperatures than PI group.

B83-10032

FUEL-CELL REACTANT-GAS PURIFIER

H. MCBRYAR and T. OLLILA (General Electric Co.)

Aug. 1983

MSC-20103

Vol. 7, No. 3, P. 278

Catalytic purifier removes oxygen from hydrogen feedlines just upstream of fuel-cell stack. Purifier consists of layer of platinum sandwiched between two sheets of porous polytetrafluoroethylene (PTFE). Platinum and PTFE elements stacked and ready for pressing. Purifier cut to size, pleated and inserted into convenient length of metal tubing. Purifier is 90 percent efficient in removing oxygen from gas stream containing 2 percent oxygen in hydrogen.

B83-10033

RECYCLING LITHIUM CARBONATE/LITHIUM HYDROXIDE WASTE

J. FLOWERS (Flowers Chemical Laboratories) and J. FLOWERS (Flowers Chemical Laboratories)

Aug. 1983

KSC-11261

Vol. 7, No. 3, P. 279

Hazardous waste disposal problem eliminated by regeneration. $\text{Li}_2\text{CO}_3/\text{LiOH}$ recycling process relies on low

solubility of alkali carbonates in corresponding hydroxides. Li_2CO_3 precipitate calcined to Li_2O , then rehydrated LiOH . Regeneration eliminates need to dispose caustic waste and uses less energy than simple calcination of entire waste mass.

B83-10034

DESULFURIZING COAL BY CHLORINOLYSIS AND HYDROGENATION

J. J. KALVINSKAS (CALTECH) and N. K. ROHATGI (CALTECH)

Aug. 1983

NPO-15304

Vol. 7, No. 3, P. 280

85 percent of organic and pyritic sulfur in coal removed by combination of chlorinolysis and hydrogenation. Coal is fed to hydrogenator after chlorination. Coal flows against hydrogen current increasing mixing and reducing hydrogen consumption. Excess hydrogen is recovered from gaseous reaction products. Product coal contained 62.5 percent less total sulfur than same coal after chlorination.

B83-10035

STRONGER CARBON FIBERS FOR REINFORCED PLASTICS

D. E. CAGLIOSTRO and N. R. LERNER

Aug. 1983

ARC-11261

Vol. 7, No. 3, P. 280

Process makes fibers 70 percent stronger at lower carbonization temperature. Stronger carbon fibers result from benzoic acid pretreatment and addition of acetylene to nitrogen carbonizing atmosphere. New process also makes carbon fibers of higher electrical resistance -- an important safety consideration.

B83-10036

GELLED ANTI-ICING AGENTS

O. F. MARKLES (Rockwell International Corp.) and H. H. SPERBER (Rockwell International Corp.)

Aug. 1983

MSC-20088

Vol. 7, No. 3, P. 281

Pectin added to antifreeze/water mixture. Formulations include water with dimethyl sulfoxide (DMSO) as deicer and pectin as gel former. Without gelling agent, deicer runs off vertical surfaces. Without pectin solution will completely evaporate in far less time. Agents developed have wide potential for ice prevention on runways, highways, bridges and sidewalks.

B83-10037

PRESERVING COLOR IN DEVELOPED PHOTOGRAPHIC FILM

R. B. HOOVER and C. M. RHODES

Aug. 1983

MFS-23250

Vol. 7, No. 3, P. 282

Controlled-atmosphere vault retards fading and deterioration of developed high speed film. Vault with externally controlled valve regulates flow of nitrogen gas from internally mounted tank. Gas purges ambient air from vault through purge valve and maintains vault pressure slightly above ambient.

B83-10038

PROCESS FOR MOLDING NONREINFORCED (NEAT) RESINS

G. E. DICKERSON

Aug. 1983

LAR-12981

Vol. 7, No. 3, P. 283

Void free moldings obtained for neat, condensation, thermosetting resins. Thermally and mechanically treat resin prior to molding to reduce amount of volatiles. With volatiles reduced molding temperature and pressure are applied in way to drive out remaining volatiles during molding.

B83-10039

MEASURING DIFFUSION AND RECOMBINATION IN POLYCRYSTALLINE SILICON

J. D. ZOOK (Honeywell, Inc.)
Aug. 1983

NPO-15601 Vol. 7, No. 3, P. 284

Light-beam-induced currents yield information about solar cell material. Apparatus measures short-circuit current generated when spot of concentrated light is scanned across grains and grain boundaries in material under test. Technique used to evaluate SOC samples for diffusion and recombination effects of cell processing and chemical and structural defects.

B83-10040
MEASURING DIFFUSION AND RECOMBINATION POLY-CRYSTALLINE SILICON

G. E. POLLOCK, F. WOELLER, and D. R. KOJIRO
Aug. 1983

ARC-11431 Vol. 7, No. 3, P. 284

Modified silica spheres enhance chromatographic separation. Commercially available silica spheres are modified by reacting them with molecules containing isocyanate and isothiocyanate groups. Applications of surface derivatized spheres that result from reaction include analysis of samples produced by atmospheric or soil probes.

B83-10041
FIRE-RESISTANT COMPOSITES

D. A. KOURTIDES and J. A. PARKER

Aug. 1983

ARC-11331 Vol. 7, No. 3, P. 285

Resin blend produces high-char-yield, low-smoke composites. Diglycidyl Ether of Bis-(4-Hydroxyphenyl)-Fluorene is prepared by reacting epichlorohydrin and sodium hydroxide with 9,9-bis(hydroxyphenyl) fluorene. End of reaction determined by gas or liquid chromatography, mass spectroscopy or infrared techniques. Used to manufacture printed circuit boards and panels for buildings, ships and aircraft.

B83-10042
STANDARDS FOR EPOXIES USED IN MICROELECTRONICS

S. V. CARUSO (Rockwell International Corp.), J. LICARI (Rockwell International Corp.), B. L. WEIGAND (Rockwell International Corp.), and C. SOYKIN (Rockwell International Corp.)

Aug. 1983

MFS-25810 Vol. 7, No. 3, P. 286

Improved qualification standards and test procedures for epoxy adhesives used in assembly of high-reliability hybrid microcircuits listed in new report. Objective of standards to resolve problems in areas of outgassing, bond shear strength, corrosivity, volume resistivity, ionic impurities, electrical stability, and frequency of qualification testing.

B83-10043
MODIFIED ANTIFREEZE LIQUIDS FOR USE ON SURFACES

R. O. LYNN

Aug. 1983

MFS-25741 Vol. 7, No. 3, P. 286

Report presents results of evaluation of two antifreeze liquids, dimethyl sulfoxide and ethylene glycol and five viscosity modifiers: gelatin, gum tragacanth, starch, agarose powder and citrus pectin. Purpose of evaluation to find best way of dealing with frost formation on Space Shuttle.

B83-10044
SOLIDIFYING BI/MNBI AT LOW GRAVITY

J. DRAUCH (Grumman Aerospace Corp.), R. LANGE (Grumman Aerospace Corp.), R. A. PIRICH (Grumman Aerospace Corp.), and W. POIT JR. (Grumman Aerospace Corp.)

Aug. 1983

MFS-25736 Vol. 7, No. 3, P. 286

Directional solidification of Bi/MnBi magnetic alloy under low gravity enhances magnetic properties. Magnetic properties of low-gravity Bi/MnBi alloy make attractive

material for use in motors and other small electrical and electronic components.

B83-10151
SOLVENT-RESISTANT POLYSULFONES

P. M. HERGENROTHER

Oct. 1983

LAR-12931 Vol. 7, No. 4, P. 401

Polysulfones terminated with trimethylsilylethynyl, ethynyl, and phenylethynyl groups increased solvent resistance. Upon application of heat, with or without catalyst, end groups react to provide cross linking and chain extension. Result: temperature of polymer increased, more importantly, solvent resistance greatly improved. Solutions used conveniently for preparation of films, coatings, membranes, prepreg, and adhesive tapes.

B83-10152
MEASURING EPOXY-CURING KINETICS

M. CIZMECIOGLU (Caltech)

Oct. 1983

NPO-15710 Vol. 7, No. 4, P. 402

Key reaction parameters estimated from single run. Single DSC Curve used to construct linearized plot from which kinetic reaction parameters are obtained: vertical axis intercept proportional to activation energy, while slope equals reaction order. DSC methods show promise for rapid screening and estimation of cure kinetic parameters of epoxy resins.

B83-10153
SUPERCRITICAL-MULTIPLE-SOLVENT EXTRACTION FROM COAL

W. CORCORAN (Caltech), W. FONG (Caltech), P. PICHAI-HANARONG (Caltech), P. CHAN (Caltech), and D. LAWSON (Caltech)

Oct. 1983

NPO-15767 Vol. 7, No. 4, P. 403

Large and small molecules dissolve different constituents. Experimental apparatus used to test supercritical extraction of hydrogen rich compounds from coal in various organic solvents. In decreasing order of importance, relevant process parameters were found to be temperature, solvent type, pressure, and residence time.

B83-10154
CALCIUM FREE ASBESTOS FOR FUEL CELLS

B. A. SNITZER (United Technologies Corp.)

Oct. 1983

MSC-20207 Vol. 7, No. 4, P. 404

Organic-acid salt removes unwanted calcium without weakening asbestos. Asbestos mixed with disodium ethylene diamine tetraacetic acid (disodium EDTA) in water and agitated for 2 hours. After disodium EDTA solution is drained away, asbestos contains only 0.02 to 0.1 percent calcium. Fiber structure of asbestos unaffected.

B83-10155
GENERATING SIF4 FROM H2SIF6

K. C. HANSEN (Lamar University) and C. L. YAWS (Lamar University)

Oct. 1983

NPO-15721 Vol. 7, No. 4, P. 404

Sodium and barium fluorosilicates precipitated and thermally decomposed into silicon tetrafluoride. Barium fluorosilicate thermally decomposes at lower temperatures in shorter times, to give same percentage yield of silicon tetrafluoride gas, than sodium fluorosilicate. Salt byproducts of decompositions recycled to precipitate fluorosilicates from hexafluorosilicic acid, the primary reactant.

B83-10156
IMPROVED O2/H2 GAS MIXTURE SENSOR

L. C. MOULTHROP (General Electric Co.)

Oct. 1983

MSC-20408 Vol. 7, No. 4, P. 406

04 MATERIALS

Monitor of mixture concentrations uses catalyzed and uncatalyzed temperature probe. Sensor includes Pt-catalyzed temperature probe mounted in line with similar uncatalyzed temperature probe. Use of common temperature probes and standard, flareless, high-pressure tubefittings resulted in design conducive to installation in almost any system. Suitable for use in regenerative fuel cells, life-support systems, and other closed systems.

B83-10157

DIRECTIONAL SOLIDIFICATION OF MONOTECTIC ALLOYS

A. HELLAWELL (Michigan Technological University)

Oct. 1983

MFS-25767

Vol. 7, No. 4, P. 408

Cooling at certain rates produced fibrous composite structures. Alloy samples melted in alumina or graphite crucibles under argon and then chillcast into 33-mm-diameter rods or sucked directly into 3-mm-bore alumina or silica tubes. Alloying not automatic with immiscible components of different densities and widely different melting points.

B83-10158

PREDICTING SINTERED-METAL RESISTIVITY FROM POROSITY

R. F. FEDORS (CALTECH)

Oct. 1983

NPO-15587

Vol. 7, No. 4, P. 407

Formula with one adjustable parameter relates electrical resistivity of sintered metal plate to porosity of plate. Sintered plate formed by heating compressed metal powder- without melting until particles adhere. Sintered nickel plates of high porosity used as substrates for electrodes in nickel/cadmium batteries.

B83-10159

DIRECTIONAL SOLIDIFICATION OF MONOTECTIC ALLOYS

A. HELLAWELL (Michigan Technological University)

Oct. 1983

MFS-25767

Vol. 7, No. 4, P. 408

Cooling at certain rates produced fibrous composite structures. Alloy samples melted in alumina or graphite crucibles under argon and then chillcast into 33-mm-diameter rods or sucked directly into 3-mm-bore alumina or silica tubes. Alloying not automatic with immiscible components of different densities and widely different melting points.

B83-10160

STRESS CORROSION CRACKING OF CERTAIN ALUMINUM ALLOYS

K. R. HASSE (Kaiser Aluminum & Chemical Corporation) and R. C. DORWARD (Kaiser Aluminum & Chemical Corporation)

Oct. 1983

MFS-25773

Vol. 7, No. 4, P. 409

SC resistance of new high-strength alloys tested. Research report describes progress in continuing investigation of stress corrosion (SC) cracking of some aluminum alloys. Objective of program is comparing SC behavior of newer high-strength alloys with established SC-resistant alloy.

B83-10161

CRACKS IN GLASS POLYMERS INDUCED BY SOLVENT ABSORPTION

R. F. FEDORS (CALTECH)

Oct. 1983

NPO-15072

Vol. 7, No. 4, P. 409

Combination of soluble particles and absorbed solvents cause polymer cracking. New failure mechanism in glassy polymers identified. Cracking caused by presence of particles insoluble in polymer matrix but soluble in solvent.

Experiments performed and equations describe cracking phenomenon set forth in concise report.

B83-10162

FREEZE/THAW PROPERTIES OF CELLULAR GLASS

P. O. FRICKLAND (CALTECH), E. L. CLELAND (CALTECH), and T. HASEGAWA (CALTECH)

Oct. 1983

NPO-15854

Vol. 7, No. 4, P. 409

Without moisture, temperature cycles do no harm. Experiments described in new report indicate inherent material variability greater deterrent to application of material than freeze/thaw effects.

B83-10163

RANDOM LIFE CURVES FOR COMMON ENGINEERING MATERIALS

T. HU (Rockwell International Corp.)

Oct. 1983

MSC-20433

Vol. 7, No. 4, P. 410

Program incorporates non-Rayleigh effects in evaluating structure life. RMS2 computer program converts constant amplitude fatigue allowables to random-loading allowables, with influence of peak distribution and mean stress considered. RMS2 written in FORTRAN IV.

B83-10326

ONE-STEP COAL LIQUEFACTION

S. A. QADER (CALTECH)

Apr. 1984

NPO-15891

Vol. 8, No. 1, P. 51

Steam injection improves yield and quality of product. Single step process for liquefying coal increases liquid yield and reduces hydrogen consumption. Principal difference between this and earlier processes includes injection of steam into reactor. Steam lowers viscosity of liquid product, so further upgrading unnecessary.

B83-10327

MOLTEN SLAG WOULD BOOST COAL CONVERSION

J. F. FERRALL (CALTECH)

Apr. 1984

NPO-15711

Vol. 8, No. 1, P. 52

Reactor increases residence time of uncovered char. Near-100-percent carbon conversion achievable in reactor incorporating molten slag bath. Slag maintains unconverted carbon impinging on surface at high temperatures for longer period of time, enhancing conversion.

B83-10328

SILICONE CERENKOV-RADIATOR MATERIAL

V. BALASUBRAHMANYAN, J. F. ORMES, and R. E. STREITMATTER

Apr. 1984

GSC-12805

Vol. 8, No. 1, P. 52

Dyes enhance visible output. Three fluorescent dyes combine to increase output of silicone material that normally has low yield of visible Cerenkov radiation by converting large amount of available ultraviolet photons into visible light.

B83-10329

DETECTING METHANE LEAKS

W. B. GRANT (CALTECH) and E. D. HINKLEY (CALTECH)

Apr. 1984

NPO-15790

Vol. 8, No. 1, P. 53

Remote sensor uses laser radiation backscattered from natural targets. He/Ne Laser System for remote scanning of Methane leaks employs topographic target to scatter light to receiver near laser transmitter. Apparatus powered by 1.5kW generator transported to field sites and pointed at suspected methane leaks. Used for remote detection of natural-gas leaks and locating methane emissions in landfill sites.

B83-10330**POLYCARBOSILAZANE-RESIN POLYMERIZATION PROCESS**B. PENN, E. LEDBETTER III, and J. CLEMONS
Apr. 1984**MFS-25758****Vol. 8, No. 1, P. 54**

Process suitable for production of silicon nitride/silicon carbide fibers. High-tensile-strength silicon carbide/silicon nitride fibers prepared by pyrolyzing fibers drawn from melt of polycarbosilazane resin. Such fibers show promise as replacements for carbon fibers in high-strength composites for automotive, aerospace, and other applications where high electrical conductivity of carbon fibers makes them unsuitable.

B83-10331**SIXNYCZ FIBERS FOR SAFER COMPOSITES**F. LEDBETTER III, B. PENN, and J. CLEMONS
Apr. 1984**MFS-25721****Vol. 8, No. 1, P. 55**

Silicon nitride/silicon carbide fibers prepared by pyrolysis of polycarbosilazanes proposed substitute for carbon fibers. Silicon nitride/silicon carbide fibers tested pyrolyzed from polycarbosilazanes prepared from tris(N-methylamino) methylsilane. Polycarbosilazane resin drawn into fiber from melt, treated and pyrolyzed. Pyrolyzed fibers are shiny black. Tests show new fibers have physical properties comparable to graphite but with lower conductivity.

B83-10332**SILICON NITRIDE ANTIREFLECTION COATINGS FOR PHOTOVOLTAIC CELLS**C. JOHNSON, T. WYDEVEN, and K. DONOHOE (Tegal Corp.)
Apr. 1984**ARC-11447****Vol. 8, No. 1, P. 55**

Chemical-vapor deposition adapted to yield graded index of refraction. Silicon nitride deposited in layers, refractive index of which decreases with distance away from cell/coating interface. Changing index of refraction allows adjustment of spectral transmittance for wavelengths which cell is most effective at converting light to electric current. Average conversion efficiency of solar cells increased from 8.84 percent to 12.63 percent.

B83-10333**IMPROVING TRACE-ION SENSITIVITY**R. N. BUGGLE (Honeywell, Inc.)
Apr. 1984**MFS-25766****Vol. 8, No. 1, P. 56**

Background noise reduced by some special precautions. Blanket of argon flows over solution so no chance for contamination from air to creep in. Conventional pump replaced with one made of polytetrafluoroethylene component and all metal couplings eliminated from flow lines. Used to improve quality control in integrated circuit fabrication, lens fabrication, and vacuum-tube assembly.

B83-10334**DISCHARGE EXTRACTS OXYGEN FROM CO₂**R. S. LUCE (Lockheed Missiles & Space Co.)
Apr. 1984**ARC-11305****Vol. 8, No. 1, P. 57**

Process under development supplies oxygen for life support in hazardous environments. Prototype CO₂ reactor vessel produces oxygen from carbon dioxide at expense of about 100 watt-hours of electricity per liter of gas reduced. Design changes to improve efficiency include narrowing gap between walls to operate at lower voltages and increasing area of one electrode while decreasing area of other to reduce capacitance.

B83-10335**PERFLUOROALKYLENE-ETHER TRIAZINE ELASTOMERS**R. W. ROSSER, T. S. CHEN (San Jose State University),
and C. CHENG (San Jose State University)

Apr. 1984

ARC-11402**Vol. 8, No. 1, P. 58**

New process yields product that resists heat and action of oxygen and water. Ring closing step, which gives elastomer its stability, imidoamidine dinitrile reacts with perfluoroether acid, yielding prepolymer. Prepolymer then treated with ammonia and cured by heating to form polymer. Elastomers are highly resistant to heat, oxidation, and hydrolysis.

B83-10336**ELASTOMER-MODIFIED POLYIMIDES**G. M. FOHLEN, J. PARKER, and I. K. VARMA
Apr. 1984**ARC-11400****Vol. 8, No. 1, P. 58**

New resins yield laminates with improved mechanical properties. Ingredients of Modified Polymer include bisimide of formula 1 and amine-terminated elastomer. Cure effected by heating to temperature suited to particular ingredients used, generally in range of 200 degrees to 300 degrees C. Solution of solvent and reactants used for fabricating fiber-reinforced structures or as adhesive.

B83-10337**PREDICTING MOISTURE ABSORPTION IN COMPOSITE MATERIALS**J. R. HAINES (McDonnell Douglas Corp.)
Apr. 1984**MSC-20109****Vol. 8, No. 1, P. 60**

Heat transport programs adaptable for absorption analysis. Lightweight sandwich panel specimen used for comparison of water absorption measurements with program predictions. In program model, moisture -- like heat in heat-transport problem moves through variety of materials and structures along complex paths.

B83-10338**IMPROVED POLYIMIDE INTUMESCENT COATING**I. O. SALYER (University of Dayton) and L. B. FOX (University of Dayton)
Apr. 1984**ARC-11369****Vol. 8, No. 1, P. 60**

New polyimide intumescent coating uses titanium dioxide and glass microballons as nucleating agents to improve foaming characteristics of commercially-available polyimide precursor resin. Used for coating interior surfaces in commercial aircraft.

B83-10339**EVALUATION OF STRUCTURAL CELLULAR GLASS**M. A. ADAMS (CALTECH) and J. G. ZWISSLER (CALTECH)
Apr. 1984**NPO-15680****Vol. 8, No. 1, P. 61**

Preliminary design information presented. First report discusses state of structural-cellular-glass programs as of June 1979. Second report gives further details of program to develop improved cellular glasses and to characterize properties of glasses and commercially available materials.

B83-10340**MICROFISSURING IN NICKEL-BASED-ALLOY WELDS**R. G. THOMPSON (Clemson University)
Apr. 1984**MFS-25815****Vol. 8, No. 1, P. 61**

Cracking mechanisms proposed. Investigation of physical metallurgy of near-solidus intergranular cracking or microfissuring in Inconel 718 alloy welds described in report. Investigation sought to identify cause of microfissuring and quantify its behavior.

B83-10341**IMPROVED THERMOSETTING IMIDE RESINS**G. M. FOHLEN, J. A. PARKER, and I. K. VARMA (NRC)
Apr. 1984**ARC-11368****Vol. 8, No. 1, P. 62**

04 MATERIALS

Modified resins have lower curing temperature. Imide monomers are chemically modified to lower cure temperature by 90 degrees, without compromising flame resistance of cured resins made from them.

B83-10342 **STRESS-CORROSION CRACKING IN MARTENSITIC PH STAINLESS STEELS**

T. HUMPHRIES and E. NELSON

Apr. 1984

MFS-25400

Vol. 8, No. 1, P. 62

Precipitation-hardening alloys evaluated in marine environment tests. Report describes marine-environment stress-corrosion cracking (SCC) tests of three martensitic precipitation hardening (PH) stainless-steel alloys.

B83-10343 **NITROGEN SUPPLY USES HYDRAZINE**

D. B. HEPPNER (Life Systems, Inc.)

Apr. 1984

ARC-11464

Vol. 8, No. 1, P. 62

Liquid hydrazine dissociated and residual gas removed to produce almost pure nitrogen. Nitrogen-generation module catalytically dissociates liquid hydrazine then dissociates and separates product gases to yield almost pure nitrogen.

B83-10344 **WALNUT HULLS CLEAN ALUMINUM**

W. R. COLBERG, G. H. GORDON, and C. H. JACKSON

Apr. 1984

MFS-27012

Vol. 8, No. 1, P. 63

Hulls inflict minimal substrate damage. Walnut hulls found to be best abrasive for cleaning aluminum surfaces prior to painting. Samples blasted with walnut hulls showed no compressive stress of surface.

B83-10345 **LOW-PRESSURE ALCOHOL DISTILLATION**

D. O. FRAZIER, F. W. ZUR BURG, and J. C. CODY

Apr. 1984

MFS-25516

Vol. 8, No. 1, P. 63

Heat requirements lowered for process. Temperature requirements lowered enough to make solar heat absorbed by flat-plate collectors feasible energy source. Alcohol produced without adding other solvents, eliminating need for dehydration or hydrocarbon stripping as final step.

B83-10346 **DIESEL PARTICULATE DESTRUCTION**

L. C. YANG (CALTECH)

Apr. 1984

NPO-15426

Vol. 8, No. 1, P. 63

Pulsed electrical discharge eliminates particulates in diesel exhaust. Particulates in diesel exhaust gas destroyed by passing them through agglomerator and series of high voltage-biased grids.

B83-10347 **DISSOLVING BUBBLES IN GLASS**

M. C. WEINBERG (CALTECH), P. I. ORONATO (GTE Corp.), and D. R. UHLMANN (MIT)

Apr. 1984

NPO-15105

Vol. 8, No. 1, P. 63

Analytical expression used to calculate time it takes for stationary bubbles of oxygen and carbon dioxide to dissolve from glass melt. Technique based on analytical expression for bubble radius as function time, with consequences of surface tension included.

B83-10348 **PACKAGING NUCLEAR AND CHEMICAL WASTE FOR DISPOSAL**

T. G. WANG (CALTECH)

Apr. 1984

NPO-15454

Vol. 8, No. 1, P. 63

In proposed method, nuclear and chemical waste quickly encapsulated in hollow silicon spheres by forming, filling and sealing sphere. Process entirely automated.

B83-10349 **EXTRACTING OIL FROM TAR SANDS**

L. B. FORD (CALTECH) and D. DALY (CALTECH)

Apr. 1984

NPO-15760

Vol. 8, No. 1, P. 63

Recovery of oil from tar sands possible by batch process, using steam produced by solar heater. In extraction process, solar heater provides steam for heating solvent boiler. Boiling solvent removes oil from tar sands in Soxhlet extractor.

B83-10350 **MONITORING LIGNIN CONTENT IN PAPER PROCESSING**

H. G. BOETTGER (CALTECH)

Apr. 1984

NPO-15796

Vol. 8, No. 1, P. 64

Feedstock and finished pulp analyzed and controlled automatically. System acquires samples from feed hopper, digester, and blow tank. Sample homogenized, washed, and dried while conveyed to flash pyrolyzer. In pyrolyzer material converted into basic constituent, mostly compounds of molecular weight less than 200.

B83-10351 **CERAMICS FOR SOLAR RECEIVERS**

A. A. KUDIRKA (CALTECH)

Apr. 1984

NPO-15763

Vol. 8, No. 1, P. 64

Materials for high-temperature use reviewed. Report discusses characteristics of ceramics and assesses potential of candidate materials in solar receivers. Design requirements presented, including those for receiver with fluid exit temperatures up to 1,425 degrees C.

B83-10352 **SIALON ELECTRODES AND INSULATORS FOR MHD DEVICE**

W. M. PHILLIPS (CALTECH)

Apr. 1984

NPO-14945

Vol. 8, No. 1, P. 64

Rectangular magnetohydrodynamic (MHD) channel structure for electrical power generation designed using pure sialon ceramic for insulating portion of structure and metal-bearing sialon cermet for conducting portion.

B83-10353 **REMOVING IMAGES FROM MICROFILM**

L. L. TAYLOR (CALTECH)

Apr. 1984

NPO-15146

Vol. 8, No. 1, P. 64

Film softened, scraped, and then dried. Unwanted images removed from microfilm for softening base film with hot water, scraping film and drying with isopropyl alcohol. Method simple and no visible damage to film.

B83-10354 **GLASS FOR SOLAR CONCENTRATORS**

F. L. BOUQUET (CALTECH)

Apr. 1984

NPO-14923

Vol. 8, No. 1, P. 64

Report identifies four commercially available glasses as promising reflectors for solar concentrators. Have properties of high reflectance (80 to 96 percent), lower cost than first-surface silver metalization, and resistance to environmental forces.

B83-10355 **REDUCING SOOT IN DIESEL EXHAUST**

J. BELLAN (CALTECH)

Apr. 1984

NPO-15715

Vol. 8, No. 1, P. 64

Electrically charged fuel improves oxidation. Fuel injection system reduces amount of soot formed in diesel engines. Spray injector electrically charges fuel droplets as they enter cylinder. Charged droplets repel each other, creating, dilute fuel mist easily penetrated by oxygen in cylinder.

B83-10356

THREE-ZONE CATALYST RESISTS SULFUR POISONING
G. E. VOECKS (CALTECH), M. F. STEPHANOPOULOS (CALTECH), and J. HOUSEMAN (CALTECH)
Apr. 1984

NPO-14827

Vol. 8, No. 1, P. 65

Three-zone catalyst bed uses different types of nickel catalysts to convert sulfur-containing hydrocarbon fuels to hydrogen and carbon monoxide. Zones designed to achieve conversion with minimal residue of unconverted hydrocarbon, no soot and minimal sulfur contamination.

B83-10357

COMBINED SILANE PYROLYSIS AND SILICON-PARTICLE MELT

H. LEVIN (CALTECH)

Apr. 1984

NPO-15510

Vol. 8, No. 1, P. 65

Melter directly coupled to pyrolyzer eliminates difficulties of transport. Proposed coupling of free-space silane pyrolyzer and melter without intervening steps produce molten silicon with no problems of fine-particle movement, storage, contamination in transport, or oxide formation.

B83-10358

EPOXY GROUT WITH SILICA THICKENER

C. E. MCCLUNG (Monsanto Research Corp.)

Apr. 1984

NPO-15202

Vol. 8, No. 1, P. 65

Grout cures quickly, even in presence of hydraulic oil. Grout is mixture of aggregate particles, finely-divided silica, epoxy resin, and triethylenetetramine curing agent, with mixture containing about 85 percent silica and aggregate particle sand 15 percent resin and curing agent. Silica is thickening agent and keeps grout from sagging.

B83-10359

MEASURING TRACE HYDROCARBONS IN SILANES

L. A. LESSER (Union Carbide Corp.)

Apr. 1984

NPO-15273

Vol. 8, No. 1, P. 65

Technique rapid and uses standard analytical equipment. Silane gas containing traces of hydrocarbons injected into carrier gas of moist nitrogen having about 0.2 percent water vapor. Carrier, water and silane pass through short column packed with powdered sodium hydroxide which combines moisture and silane to form nonvolatile sodium silicate. Carrier gas free of silane but containing nonreactive hydrocarbons, pass to silica-gel column where chromatographic separation takes place. Hydrocarbons measured by FID.

B83-10360

PLATED METAL POWDERS FOR ELECTRODE PASTES

D. B. BICKLER (CALTECH)

Apr. 1984

NPO-15161

Vol. 8, No. 1, P. 65

Metal grains to be sintered precoated with frit metal. Coated metal powders used to make ink-like electrode pastes for printing and sintering electrode-fabrication process. Grains of base metal coated with lowmelting-point, lead or tin-- by electroless deposition.

B83-10361

RHENIUM PREVENTS CORROSION

M. A. APPEL (CALTECH)

Apr. 1984

NPO-15011

Vol. 8, No. 1, P. 66

Rhenium layer inside carbon-composite thrust chamber

prevents corrosion when liquid fluorine/hydrazine rocket engine is fired. Liner also eliminates erosion of solid propellant carbon nozzles.

B83-10362

HYDROGEN PRODUCTION FROM HEAVY FUELS

G. E. VOECKS (CALTECH) and M. F. STEPHANOPOULOS (CALTECH)

Apr. 1984

NPO-14826

Vol. 8, No. 1, P. 66

Better heat transfer properties avoid sulfur poisoning of catalyst. Monolithic supported catalyst allows initiation of steam reforming to take place more rapidly at inlet section of reactor.

B83-10363

MAKING THERMOPLASTICS FLAME-RESISTANT

W. A. MUELLER (CALTECH), J. D. INGHAM (CALTECH), and W. W. REILLY (CALTECH)

Apr. 1984

NPO-14857

Vol. 8, No. 1, P. 66

Inorganic hydrate-salt filler coated with elastomer containing acidic groups imparts flame and smoke retardancy to thermoplastics while preventing degradation of impact resistance that results from high filler loadings in thermoplastic.

B83-10364

RADIATION IMPROVES MATERIALS BONDING

F. L. BOUQUET (CALTECH)

Apr. 1984

NPO-14995

Vol. 8, No. 1, P. 66

Bonds with fluorocarbons made with surface preparation. Irradiating rubber-based adhesives produce strong adhesive bond with fluorocarbons without extensive surface preparation.

B83-10365

DEWATERING PEAT WITH ACTIVATED CARBON

N. K. ROHATGI (CALTECH)

Apr. 1984

NPO-15113

Vol. 8, No. 1, P. 66

Proposed process produces enough gas and carbon to sustain itself. In proposed process peat slurry is dewatered to approximately 40 percent moisture content by mixing slurry with activated carbon and filtering with solid/liquid separation techniques.

B83-10366

IMPROVED GAS SEAL FOR ELECTROLYTIC CELLS

R. RICHTER (CALTECH)

Apr. 1984

NPO-15163

Vol. 8, No. 1, P. 66

Breakage by differential thermal expansion reduced. Cells for hot electrolysis of gases improved by design that reduces vulnerability of gas seals to breakage at operating temperature of about 1000 degrees C.

B83-10568

RECOVERING ZINC FROM DISCARDED TIRES

E. R. DU FRESNE (CALTECH)

Nov. 1984

NPO-16046

Vol. 8, No. 2, P. 205

Zinc sulfate monohydrate sold at profit. Shredded tire material steeped in three sulfuric acid baths to extract zinc. Final product removed by evaporating part of solution until product crystallizes out. Recovered as zinc sulfate monohydrate and sold as fertilizer or for general use.

B83-10569

PACKED ALUMINA ABSORBS HYPERGOLIC VAPORS

J. J. THOMAS (Florida Institute of Technology) and D. M. MAURO (Florida Institute of Technology)

Nov. 1984

KSC-11278

Vol. 8, No. 2, P. 206

Beds of activated alumina effective as filters to remove

04 MATERIALS

hypergolic vapors from gas streams. Beds absorb such substances as nitrogen oxides and hydrazines and may also absorb acetylene, ethylene, hydrogen sulfide, benzene, butadiene, butene, styrene, toluene, and xylene. Bed has no moving parts such as pumps, blowers and mixers. Reliable and energy-conservative. Bed readily adapted to any size from small portable units for use where little vapor release is expected to large stationary units for extensive transfer operations.

B83-10570 CONTAINERLESS SOLIDIFICATION OF AMORPHOUS METALS

M. C. LEE (CALTECH) and W. L. JOHNSON (CALTECH)
Nov. 1984

NPO-15776 Vol. 8, No. 2, P. 207

Method produces large amorphous alloys. Spheres of amorphous metal alloys formed and collected after molten samples coated and cooled in drop tube. Coated spheres cooled acoustically and cryogenically. Amorphous specimens 5mm in diameter or larger possible.

B83-10571 CHARRING, NONMELTING EPOXY FOAMS

C. B. DELANO (Acurex Corp.)

Nov. 1984

MFS-25911

Vol. 8, No. 2, P. 208

Addition of vanadium compounds prevents melting. For safety, structural plastic foam should turn into rigid char when it burns, without melting. Addition of small amounts of vanadium compounds to some epoxy resins promotes char formation.

B83-10572 OXIDATION-RESISTANT SLURRY COATING FOR CARBON-BASED MATERIALS

J. L. SMIALEK

Nov. 1984

LEW-13951

Vol. 8, No. 2, P. 208

New process uses paint sprayer and vacuum furnace to produce silicon carbide outer layer. In cross section of silicon and silicon carbide reaction zone, top layer of silicon adheres to silicon carbide layer. Crystals prominent on melted top surface of slurry coating. Process especially useful in coating repair.

B83-10573 TWO-LAYER GLASS THERMAL-CONTROL COATING

D. A. STEWART, H. E. GOLDSTEIN, and D. B. LEISER (Stanford University)

Nov. 1984

ARC-11164

Vol. 8, No. 2, P. 209

Optical properties endure high temperatures. Coating has outer scattering layer and inner high emissivity layer. Absorptivity/emissivity ratio less than 0.4. Coating withstands repeated exposure to temperatures in excess of 2,000 degrees F. Coating has industrial uses in solar-energy equipment, high temperature chemical processing systems, laboratory equipment and high temperature instrumentation.

B83-10574 CONTINUOUS MONITORING OF MELT COMPOSITION

R. E. FRAZER (CALTECH) and T. W. ANDREWS (CALTECH)

Nov. 1984

NPO-15896

Vol. 8, No. 2, P. 210

Compositions of glasses and alloys analyzed and corrected in real time. Spectral analysis and temperature measurement performed simultaneously on molten material in container, such as open-hearth furnace, crucible or tank of continuous furnace. Speed of analysis makes it possible to quickly measure concentration of volatile elements depleted by prolonged heating.

B83-10575 LOW-DENSITY HIGH-STRENGTH FOAMED MATERIALS

T. WANG (CALTECH), D. ELLEMAN (CALTECH), and J. M. KENDALL JR. (CALTECH)
Nov. 1984

NPO-15411

Vol. 8, No. 2, P. 211

Molten bubbles of metal or plastic coalesce into strong, lightweight materials that look like solidified foam. Bubbles formed in compartment that receives molten material and compressed gas that fills bubbles. Compartment has matrix of nozzles. Leaving nozzles, bubbles fall into acoustic chamber and coalesce; then drop through funnel and are cast into desired shape by extrusion or molding. Materials used for construction, extruded into molds, sawed, nailed, and generally handled as wood.

B83-10576 ESTIMATING THE LIFETIMES OF NICKEL/CADMIUM CELLS

R. F. FEDORS (CALTECH), S. D. HONG (CALTECH), A. GUPTA (CALTECH), and M. CIZMECIOGLU (CALTECH)
Nov. 1984

NPO-15145

Vol. 8, No. 2, P. 212

Equation based on model of flaw growth. Model assumes cell fails by growth of preexisting flaws. Flaws described by three important quantities: total number of flaws, distribution of flaw sizes and rate of flaw growth. When flaw reaches critical size failure occurs. Flaw concept, in addition to providing ready explanation for reduced lifetime, predicts two important characteristics: statistical variability of lifetime data and dependence of lifetime on volume of sample.

B83-10577 FIRE-RESISTANT TFE EXTRUSIONS

A. T. SHEPPARD (Martin Marietta Corp.)

Nov. 1984

MFS-25917

Vol. 8, No. 2, P. 212

Fire resistance of extruded tetrafluoroethylene (TFE) polymers improved by substitution of chlorinated hydrocarbon as wetting agent. Replacement of naphtha with perchloroethylene yields polymer that extrudes well and generates fewer pinholes. Product less susceptible to fire during manufacturing and in service.

B83-10578 IN SITU CROSS-LINKING OF POLYVINYL ALCOHOL FILMS

W. H. PHILIPP, L. C. SHU, and C. E. MAY

Nov. 1984 See Also NASA-TP-1407 (N79-21128/NSP)

LEW-13135

Vol. 8, No. 2, P. 213

Films or impregnated matrices readily made from aqueous polyvinyl alcohol solution. Controlled thickness films made by casting precise quantities of aqueous polymer solution on smooth surface, allowing water to evaporate and then removing film. Composite separators formed in similar fashion by impregnating cloth matrix with polyvinyl alcohol solution and drying composite. Insoluble thin hydrophilic membranes made from aqueous systems, and use of undesirable organic solvents not required.

B83-10579 BINDER FOR CARBON-FIBER COATING

W. L. DOWLER (CALTECH), K. N. RAMOHALLI (CALTECH), S. P. S. YEN (CALTECH), W. A. MUELLER (CALTECH), and J. HARPER (CALTECH)

Nov. 1984

NPO-14988

Vol. 8, No. 2, P. 214

Insoluble, even coating formed by soaking in polyacrylic acid. Carbon fiber material prepared by soaking in solution of 20 percent polyacrylic acid in water. Material blotted and dried at 120 degrees C for at least 2 hours. Dried material reacted with boiling aqueous solution of calcium acetate. Treated material removed from boiling solution, blotted, dried at 120 degrees C, washed with distilled water, and dried again.

B83-10580**DYE INDICATORS FOR ACIDIC OR BASIC SURFACE CONTAMINATION**

A. LAKIN (Rockwell International Corp.) and F. SCHULER (Rockwell International Corp.)

Nov. 1984

MFS-19387**Vol. 8, No. 2, P. 214**

Application of pH-sensitive dye solution serves as test for acidic or basic contamination of critical bonding surface. Aqueous solution of 0.1 percent Direct Red No. 28 capable of indicating acid activating solution down to 10 parts per million on hardware and tooling. Dye did not cause detectable contamination of surface.

B83-10581**CONTAINERLESS PROCESSING OF ADVANCED GLASSES**

R. HAPPE (Rockwell International Corp.) and K. KIM (Rockwell International Corp.)

Nov. 1984

MFS-27002**Vol. 8, No. 2, P. 214**

Report describes investigation of containerless processing of glass, conducted in preparation of gravity-free processing experiments on board Space Shuttle. 105 candidate glass materials screened. Large number of oxide proportions studied and ternary phase diagram of glass formation developed as result.

B83-10582**DESTROYING TOXIC WASTES**

G. E. VOECKS (CALTECH)

Nov. 1984

NPO-15655**Vol. 8, No. 2, P. 215**

Toxic pesticides and halogenated hydrocarbons converted to fuels and harmless waste by catalyzed combustion. These product gases used directly as fuel or catalytically converted to methanol.

B83-10583**HOLLOW SPHERES OF METALLIC GLASS**

M. C. LEE (CALTECH)

Nov. 1984

NPO-15991**Vol. 8, No. 2, P. 215**

Uniform hollow spheres of gold/lead/antimony glass formed by blowing bubbles of molten metal into helium-filled drop tube. Useful in fusion target applications.

B83-10584**PLASMA-SPRAYED COPPER TIE-IN FOR NICKEL PLATING**

J. W. LOMBARD (Rockwell International Corp.) and J. E. OTOUSA (Rockwell International Corp.)

Nov. 1984

MFS-19481**Vol. 8, No. 2, P. 215**

Foam insulation nickel-plated with one less step. Changing tie-in layer from plasma-sprayed nickel to plasma-sprayed copper eliminates intermediate copper electroplating step previously required.

B83-10585**MAKING SIXNYCZ FIBERS BY PYROLYSIS**

R. MARKLE (Battelle Columbus Laboratories), I. SEKERCIOGLU (Battelle Columbus Laboratories), D. HILL (Battelle Columbus Laboratories), R. R. WILLIS (Battelle Columbus Laboratories), and R. SINCLAIR (Battelle Columbus Laboratories)

Nov. 1984

MFS-25621**Vol. 8, No. 2, P. 215**

Investigation part of continuing effort to produce fibers strong enough to replace graphite in fiber/polymer composites.

B83-10586**ETCHANTS FOR SOME CORROSION-RESISTANT METALS**

J. SIMMONS (Martin Marietta Aerospace)

Nov. 1984 See Also NASA CR-161431 (N80-25414/NSP) **MFS-25467****Vol. 8, No. 2, P. 216**

Solutions that etch some corrosion-resistant metals described in test report. Etchants selected remove at least 0.4 mil of surface material per hour from nickel alloys, austenitic stainless steel, and annealed titanium alloys, without intergranular attack.

B83-10587**HOT MICROFISSURING IN NICKEL ALLOY**

R. G. THOMPSON (University of Alabama) and A. NUNES

Nov. 1984 See Also NASA CR-161878 (N82-10194/NSP)

MFS-25763**Vol. 8, No. 2, P. 216**

Experiments in intergranular cracking of nickel alloy near solidus temperature discussed in contractor report. Purpose of investigation development of schedule for welding, casting, forging, or other processing of alloy without causing microfissuring.

B83-10588**ADDITIONAL HEAT TREATMENT FOR SILICA-FIBER INSULATION**

E. MADUK (Lockheed Missiles & Space Co., Inc.), I. CARPENTER (Lockheed Missiles & Space Co., Inc.), and E. GZOWSKI (Lockheed Missiles & Space Co., Inc.)

Nov. 1984

MSC-20600**Vol. 8, No. 2, P. 216**

Presintering heat treatment found to prevent cracking in silica-fiber billets used to make thermally-insulating tiles.

B83-10589**CATALYTIC COAL LIQUEFACTION WITH IRON SULFATE**

S. A. QADER (CALTECH)

Nov. 1984

NPO-15727**Vol. 8, No. 2, P. 216**

Very high conversion yields demonstrated with iron sulfate used in solution with water or solvent to impregnate coal.

B83-10590**SAMPLING OF SILICON POWDER FOR IMPURITY ANALYSIS**

K. A. YAMAKAWA (CALTECH) and O. R. MCCULLOUGH (CALTECH)

Nov. 1984

NPO-15840**Vol. 8, No. 2, P. 216**

Electron beam forms dense pellets of powdered silicon for Zeeman analysis. Sampling method focuses electron beam on submicron silicon powder. Process enhances quality control in production of low-cost silicon powder for semiconductor industry.

B83-10591**SILANE PYROLYSIS WITH SILICON-SEED AEROSOL**

R. C. FLAGAN (CALTECH) and M. K. ALAM (CALTECH)

Nov. 1984

NPO-16054**Vol. 8, No. 2, P. 217**

Large silicon particles result from controlled pyrolysis of silane. Mixture of 1 percent silane in nitrogen pyrolyzed at 300 degrees C to generate aerosol of silicon seed particles.

B83-10592**AUTOMATED MAGNETIC SUSCEPTIBILITY ANALYSIS**

T. J. RATHZ

Nov. 1984

MFS-25935**Vol. 8, No. 2, P. 217**

Microprocessor-controlled susceptometer measures cryogenic temperature dependence of ac magnetic susceptibility of small cylindrical samples.

B83-10593**REMOVING SULFUR DIOXIDE FROM FLUE GASES**

G. R. GAVALAS (CALTECH) and M. F. STEPHANOPOULOS (CALTECH)

Nov. 1984

04 MATERIALS

NPO-15758 Vol. 8, No. 2, P. 217
In situ removal of SO₂ in flue gases and fluidized-coal combustors, with no waste product possible using NaO/LiO as regenerable supported molten sorbent.

B83-10594
X-RAY-DIFFRACTION ANALYSIS OF NB/GE ALLOYS
J. H. DAVIS (University of Alabama) and K. HOUSE (University of Alabama)
Nov. 1984

MFS-27038 Vol. 8, No. 2, P. 217
Investigation of series of niobium/germanium alloys produced by supercooling discussed in report.

B83-10595
CONDUCTIVE PLASMA-SPRAYED COATINGS
V. F. HRIBAR (CALTECH)
Nov. 1984

NPO-15927 Vol. 8, No. 2, P. 217
Normal emittance of oxidized titanium foil used as plume shields at high temperature significantly increased by plasma coating with specific ceramic materials.

B83-10536
HIGH-TEMPERATURE, LOW-GRAVITY CASTING FURNACE
H. M. KING, J. R. SHORT, R. E. SHURNEY, T. F. MORRIS, R. A. PARR, M. H. JOHNSTON, and D. D. WEBB
Nov. 1984

MFS-25605 Vol. 8, No. 2, P. 217
Up to six different samples processed. Experimental melting and casting furnace designed to perform metallurgical studies in low gravity.

B83-10597
FURNACE FOR RAPID HEATING AND COOLING
R. M. POORMAN
Nov. 1984

MFS-25707 Vol. 8, No. 2, P. 218
Furnace heats specimen to above 1,200 degrees C and then cools it to below 900 degrees C in just a few minutes. Compressed solid reactant provides heat; liquid carbon dioxide provides cold.

05 LIFE SCIENCES

B83-10045
HEART-RATE AND BREATH-RATE MONITOR
T. G. COOPER (Narco Scientific)
Aug. 1983

MSC-20078 Vol. 7, No. 3, P. 289
Circuit requiring only four integrated circuits (IC's) measures both heart rate and breath rate. Phase-locked loops lock on heart-rate and respiration-rate input signals. Each loop IC contains two phase comparators. Positive-edge-triggered circuit used in making monitors insensitive to duty-cycle variations.

B83-10046
MICROPROCESSOR-BASED NEURAL-PULSE-WAVE ANALYZER
G. K. KOJIMA and F. BRACCHI (Universita di Milano, Milan)
Aug. 1983

ARC-11388 Vol. 7, No. 3, P. 290
Microprocessor-based system analyzes amplitudes and rise times of neural waveforms. Displaying histograms of measured parameters helps researchers determine how many nerves contribute to signal and specify waveform

characteristics of each. Results are improved noise rejection, full or partial separation of overlapping peaks, and isolation and identification of related peaks in different histograms.

B83-10164
FLOWTHROUGH BACTERIA-DETECTION SYSTEM
D. C. GRANA and J. R. WILKINS
Oct. 1983

LAR-12871 Vol. 7, No. 4, P. 413
Online system allows repetitive cycling of sample intake, bacteria counting and sterilization. System measures bacteria count by using sample/incubate/measure cycle. Steps in cycle are on/off operations to cycle automated easily.

B83-10165
LIGHTWEIGHT, ECONOMICAL DEVICE ALLEVIATES DROP FOOT
B. C. DEIS
Oct. 1983

LAR-12259 Vol. 7, No. 4, P. 414
Corrective apparatus alleviates difficulties in walking for victims of drop foot. Elastic line attached to legband provides flexible support to toe of shoe. Device used with flat (heelless) shoes, sneakers, crepe-soled shoes, canvas shoes, and many other types of shoes not usable with short leg brace.

B83-10166
TRANSDUCER JOINT FOR KIDNEY-STONE ULTRASONICS
E. D. ANGULO
Oct. 1983

GSC-12652 Vol. 7, No. 4, P. 415
Ultrasonic therapy for kidney stones improved by new way of connecting wire-probe ultrasonic waveguide to transducer. Improved mounting allows joint to last long enough for effective treatment. Sheath and rubber dampers constrain lateral vibration of wire waveguide. Combination of V-shaped mounting groove, sheath, and rubber dampers increases life expectancy of wire 15 times or more.

B83-10167
SHARP-FOCUS COMPOSITE MICROSCOPE IMAGING BY COMPUTER
R. J. WALL (CALTECH)
Oct. 1983

NPO-15207 Vol. 7, No. 4, P. 416
Enhanced depth of focus aids medical analysis. Computer image-processing system synthesizes sharply-focused composite picture from series of photomicrographs of same object taken at different depths. Computer rejects blurred parts of each photomicrograph. Remaining in focus portions form focused composite. System used to study alveolar lung tissue and has applications in medicine and physical sciences.

B83-10367
ACOUSTIC TOOTH CLEANER
J. S. HEYMAN
Apr. 1984

LAR-12471 Vol. 8, No. 1, P. 69
Acoustically-energized water jet aids in plaque breakdown. Acoustic Wand includes acoustic transducer 1/4 wave plate, and tapered cone. Together elements energize solution of water containing mild abrasive injected into mouth to help prevent calculus buildup.

B83-10368
AUTOMATED COLIFORM ANALYSIS
K. NISHIOKA, D. NIBLEY (The Boeing Co.), E. JEFFERS (The Boeing Co.), and R. BROOKS (The Boeing Co.)
Apr. 1984

ARC-11322 Vol. 8, No. 1, P. 70
Hydrogen evolved by coliform bacteria transferred to

separate measurement cell. Electroanalytic cell mounted in insulated temperature-control bath cycled between culturing temperature and sterilizing temperature. Flow of materials into and out of cell controlled by electrically operated valves.

B83-10369
ADJUSTABLE WALKER FOR THE HANDICAPPED

R. G. KITTS

Apr. 1984

LAR-12990

Vol. 8, No. 1, P. 71

Front legs adjust at touch of lever for use on stairs or ramps. Spring loaded legs extend when lever is depressed by user. Legs lock in position when lever is released. Lever mounted on either side of walker or on both sides, so legs operated independently.

B83-10370
REMOVING BIOSTATIC AGENTS FROM FERMENTATION SOLUTIONS

E. R. DU FRESNE (CALTECH)

Apr. 1984

NPO-15806

Vol. 8, No. 1, P. 72

Liquid carbon dioxide inexpensive solvent. Inexpensive process proposed for removing such poisons as furfural and related compounds from fermentation baths of biomass hydrolysates. New process based on use of liquid carbon dioxide as extraction solvent. Liquid CO₂ preferable to such other liquid solvents as ether or methylene chloride.

B83-10371
COMPUTER ANALYSIS OF EYE BLOOD-VESSEL IMAGES

R. J. WALL (CALTECH) and B. S. WHITE (CALTECH)

Apr. 1984

NPO-15527

Vol. 8, No. 1, P. 72

Technique rapidly diagnoses diabetes mellitus. Photographs of 'whites' of patients' eyes scanned by computerized image analyzer programmed to quantify density of small blood vessels in conjunctiva. Comparison with data base of known normal and diabetic patients facilitates rapid diagnosis.

B83-10372
INFLATABLE RESCUE CAPSULES

J. L. BAKER

Apr. 1984

MFS-25677

Vol. 8, No. 1, P. 72

Rescue spheres transfer people from disabled vehicle to rescue vehicle. Container, inflatable sphere, constructed of gastight thermalprotective fabric to provide protection during transfer.

B83-10598
HIGH-FLOW ASYMMETRIC REVERSE-OSMOSIS MEMBRANES

M. C. KATZ and T. J. WYDEVEN

Nov. 1984

ARC-11359

Vol. 8, No. 2, P. 221

Water-soluble polymer membrane insolubilized by transition-metal salt. Thin layer of lower permeability material joined with thicker layer of higher permeability material. Two layers chemically identical or chemically distinct. They differ in density, compactness or other respects. Used to purify or desalinate seawater, brackish water, or industrial or domestic wastewater.

B83-10599
SOLVENT EXTRACTION OF FURFURAL FROM BIOMASS

M. F. HUMPHREY (CALTECH)

Nov. 1984

NPO-15987

Vol. 8, No. 2, P. 222

Solvent-extraction method reduces energy required to remove furfural produced during acid hydrolysis of biomass. Acid hydrolysis performed in vessel containing both solvents and reacting ingredients. With intimate contact between

solvents and aqueous hydrolysis liquor, furfural removed from liquor almost as fast as it forms.

B83-10600
SPECULATION ON ULTRASONIC DISINTEGRATION OF ARTERIAL DEPOSITS

J. M. CLEMONS and D. M. KORNFIELD

Nov. 1984

MFS-25161

Vol. 8, No. 2, P. 222

Small ultrasonic probe, in conjunction with aspirator breaks up and removes atherosclerotic plaque from insides of arteries.

B83-10601
YEASTS WITH INCREASED GLYCOGEN LEVELS

M. N. DASTOOR (CALTECH), G. R. PETERSEN (CALTECH), W. W. SCHUBERT (CALTECH), and B. O. STOKES (CALTECH)

Nov. 1984

NPO-15571

Vol. 8, No. 2, P. 222

Chemical/biological process produces single-cell food from waste carbon dioxide and hydrogen. Used in reactor for producing single-cell food.

06 MECHANICS

B83-10047
INSTRUMENT MEASURES AIRFLOW FRICTION WITHOUT CONTACT

D. J. MONSON

Aug. 1983

ARC-11354

Vol. 7, No. 3, P. 293

Dual beam laser interferometer determines airflow friction against body by measuring time-varying thickness of wind sheared oil film. Measurements yield skin friction between film and airstream. Errors from prerun oil flow, tunnel starting transients, and initial surface waves therefore eliminated.

B83-10048
REDUCED AIRCRAFT-ENGINE NOISE

H. K. TANNA (Lockheed Corp.), W. H. BROWN (Lockheed Corp.), and C. K. TAM (Lockheed Corp.)

Aug. 1983 See Also NASA CR-3454 (N81-30908/NSP)

LAR-12890

Vol. 7, No. 3, P. 294

Shock structure modified to eliminate associated noise. Shock wave repeats in supersonic flow adjoining subsonic flow layer. When supersonic layer is added, shock wave is partially transmitted at interface. Result is almost total elimination of shock pattern after one or two reflections. Technique applicable to inverted as well as to normal-velocity-profile coannular jets and used to eliminate or reduce shock noise of turbojet engines.

B83-10049
NOISE CONTROL IN PROPELLER-DRIVEN AIRCRAFT

D. C. RENNISON (Bolt Beranek and Newman, Inc.) and J. F. WILBY (Bolt Beranek and Newman, Inc.)

Aug. 1983 See Also NASA CR-159200(N80-25102/NSP)

LAR-12954

Vol. 7, No. 3, P. 295

Analytical model predicts noise levels inside propeller-driven aircraft during cruise at mach 0.8. Double wall sidewalls minimize interior noise and weight. Model applied to three aircraft with fuselages of different size (wide-body, narrow-body, and small-diameter) to determine noise reductions required to achieve A-weighted sound level not to exceed 80 dB.

06 MECHANICS

B83-10050

DISCRIMINATING BETWEEN LIQUID AND GAS FLOWS

C. M. BERDAHL (CALTECH)

Aug. 1983

NPO-15531

Vol. 7, No. 3, P. 295

Flow sensor distinguishes flowing gases from liquids. Sensor allows liquids to pass, but would signal valve to turn off flow of gases. Concept developed for propulsion systems in which liquid fuel is forced out of storage tank by high-pressure gas. Controller stops flow of gas from fuel tank after liquid has been depleted.

B83-10051

SHELL-TILE THERMAL-PROTECTION SYSTEM

I. O. MACCONOCHIE, A. G. LOWSON, and H. N. KELLY

Aug. 1983

LAR-12862

Vol. 7, No. 3, P. 296

Durable shell-tile thermal-protection system consists of interlocking upper and lower hard caps, incorporating appropriate stiffeners and enclosing lightweight fibrous insulation. New shell tile more durable than reusable surface insulation (RSI) currently used on Space Shuttle orbiter.

B83-10052

CHECKING SURFACE CONTOURS

D. VELEGA (Beech Aircraft Corp.)

Aug. 1983

MSC-20318

Vol. 7, No. 3, P. 297

Rubber impressions viewed with optical comparator. Simple mold constructed from aluminum sheet or any other easily shaped material compatible with silicone rubber ingredients. Mold placed over surface to be measured. Newly-mixed silicone rubber compound poured in mold and allowed to cure.

B83-10053

ELECTRICAL DISSIPATION MEASUREMENT OF POLYMER PHASE TRANSITIONS

E. R. LONG JR. and A. SCHUSZLER II

Aug. 1983

LAR-12861

Vol. 7, No. 3, P. 298

Technique measures solid/solid, glass/rubber, and liquid/liquid transition temperatures in polymers having dipole moments. Technique based on change in dipole packing that occurs with each transition and measured as change in electrical dissipation factor. Change in dipole packing occurring with each transition sensed by effect on dissipation factor.

B83-10054

DETERMINING THE ORIENTATION OF ANISOTROPIC MATERIALS

F. E. SUGG (Rockwell International Corp.) and P. J. HODGETTS (Rockwell International Corp.)

Aug. 1983

MSC-20229

Vol. 7, No. 3, P. 299

Ultrasonics probe direction of tile fibers. Hand-held acoustic transducer determines fiber orientation of heat resistant tiles. Transducers head placed on outer surface of painted tile. Signals from receiving transducers displayed on two-channel oscilloscope. Application suggests extending technique to inspection of other anisotropic materials. Plywood and fiber/epoxy composites examined to determine fiber direction; ultrasonics used to find direction of roll in sheet metal and other rolled products.

B83-10055

MEASURING ELASTIC MODULUS OF SINTERED METAL

R. F. FEDORS (CALTECH) and A. F. EASTMAN (CALTECH)

Aug. 1983

NPO-15589

Vol. 7, No. 3, P. 299

Technique minimizes effect of substrate on thin sintered coating. Uniaxial tension test yields approximate value for elastic modulus of sintered material on thin substrate.

Electrode composed of central perforated nickel plated steel sheet about 4 mils (0.1mm) thick, coated on each face by porous sintered nickel about 8 mils (0.2mm) thick.

B83-10056

DISPENSING SMALL MEASURED VOLUMES OF LIQUID

G. LARSON (United Space Boosters, Inc.) and J. SMITH (United Space Boosters, Inc.)

Aug. 1983

MFS-25690

Vol. 7, No. 3, P. 300

Dispensing unit measures, filters, and unloads oil into container. Used in automobile manufacturing to dispense antifreeze solution into radiators or oil into engines, transmissions, or differentials. Uses gaseous nitrogen to control pressure, flow rate, and quality precisely, with minimal contamination from atmosphere.

B83-10057

CHARACTERIZING SHEAR PROPERTIES OF MEMBRANES

B. SIMPSON (Lockheed Missiles & Space Co., Inc.)

Aug. 1983

MFS-25745

Vol. 7, No. 3, P. 301

Method devised to obtain static shear stiffness data for membranes. Shear deflection of membrane measured under various applied static shear loads, and measurements plotted. Match attempted between experimental plot and predicted load-vs.-deflections curves until best fitting theoretical curve is found.

B83-10058

MEASURING ULTRASONIC SHEAR-WAVE VELOCITY

J. NUMMELIN (Rockwell International Corp.)

Aug. 1983

MFS-19680

Vol. 7, No. 3, P. 302

New technique improves accuracy of measurements of ultrasonic shearwave velocity. Technique eliminates need to measure incident sound angle. Technique contains groove in which steel sphere is placed. Sphere act as reference point for measuring path lengths and propagation times. Velocity measurements are within 1 percent of published data.

B83-10059

PROBE ARRAY FOR TESTING PRINTED-CIRCUIT SUBSTRATES

A. ROISON (General Electric Co.), C. ALBERT (General Electric Co.), C. BIANCHI (General Electric Co.), and J. EHLAND (General Electric Co.)

Aug. 1983

GSC-12759

Vol. 7, No. 3, P. 303

Array of tiny probes tests complex printed circuit boards prior to mounting of microcircuit chips and other active and passive components. Insertion and alignment of board, performance of entire computer-controlled test, and printing of results requires about a minute; performed manually same tests require as much as 30 hours.

B83-10060

SAMPLE HOLDER FOR CRYOGENIC ADHESIVE SHEAR TEST

F. E. LEDBETTER, J. M. CLEMONS, W. T. WHITE, B. PENN, and M. L. SEMMEL

Aug. 1983

MFS-25729

Vol. 7, No. 3, P. 304

Five samples tested in one cooldown. Holder mounted in testing machine. Submerged in cryogenic liquid held in cryostat. Movable crosshead of testing machine moves gradually downward. Samples placed under tension, one after another, starting with top one; each sample fails in turn before next is stressed.

B83-10061

GAS-TEMPERATURE MEASUREMENT WITH MINIMAL PERTURBATION

T. S. FU (Rockwell International Corp.) and M. QUAN

(Rockwell International Corp.)

Aug. 1983

MSC-20338

Vol. 7, No. 3, P. 305

Method for measuring temperature of hot turbulent gases uses three heatflux calorimeters. One calorimeter measures radiative heat flux, while other two measure total heat flux (convective and radiative), at two different temperatures. Adapted for commercial uses in such operations as monitoring temperatures of flue gases, piped liquid or gaseous products, internal-combustion or jet engine exhausts.

B83-10062

TWO-DEGREE-OF-FREEDOM MOUNT SYSTEM FOR FLUTTER MODELS

M. G. FARMER

Aug. 1983 See Also NASA TM-83302 (N82-23549/NSP)

LAR-12950

Vol. 7, No. 3, P. 306

Flexible rods replace conventional bearing supports to minimize structural damping. Aerodynamic damping not masked by effects of mount system, making more accurate studies possible of how aerodynamic damping varies as flow over model changed. New system called PAPA.

B83-10063

MEASURING SMALL LEAK HOLES

D. E. KOCH (Rockwell International Corp.) and J. G. STEPHENSON (Rockwell International Corp.)

Aug. 1983

MSC-20113

Vol. 7, No. 3, P. 307

Hole sizes deduced from pressure measurements. Measuring apparatus consists of pitot tube attached to water-filled manometer. Compartment tested is pressurized with air. Pitot probe placed at known distance from leak. Dynamic pressure of jet measured at that point and static pressure measured in compartment. Useful in situations in which small leaks are tolerable but large leaks are not.

B83-10064

FLEXIBLE COUPLING FOR ANGLE TRANSDUCER

R. A. MAYO (CALTECH)

Aug. 1983

NPO-15412

Vol. 7, No. 3, P. 308

Flexure strips ensure parallelism between input and output shafts. Coupling essentially gimbal mounting that behaves as four-bar linkage. Creates remote phantom pivot point that remains stationary for small displacements of coupling.

B83-10065

INSTRUMENTED PICK DETECTS COAL/ROCK INTERFACE

T. WU (General Electric Co.) and J. W. ERKES (General Electric Co.)

Aug. 1983

MFS-25753

Vol. 7, No. 3, P. 308

Instrumented pick installed on cutting drum of coal shearer for longwall mining measures cutting force with strain-gage-bridge load cell. Force signal transmitted to remote recorder. Transmitter located in base of pick assembly. Antenna located in shadow of rotating pick. Changes in characteristics of force signals from pick used to determine whether pick is cutting coal or rock.

B83-10066

PORTABLE PALLET-WEIGHING APPARATUS

R. M. DAY

Aug. 1983

GSC-12789

Vol. 7, No. 3, P. 309

Portable apparatus intended for standard four-trunnion pallets readily adaptable to any large payload or other loads where shifting of cargo is to be avoided. Device lifts trunnion of pallet short distance above its resting place. Weight at trunnion applied to load cell. Similar units placed at all four trunnions.

B83-10067

PROPOSED SHORT-THROAT SUPERSONIC NOZZLES

W. R. WAGNER (Rockwell International Corp.) and G. H. RATEKIN (Rockwell International Corp.)

Aug. 1983

MFS-19759

Vol. 7, No. 3, P. 310

Numerical procedure analyzes mach numbers along wall and in flow field, wall pressures, gas temperatures, and nozzle-throat discharge coefficients. Nozzles used in turbines, jet engines, magnetohydrodynamic systems, laser systems and other supersonic-flow devices.

B83-10068

SIMPLIFIED MODELING OF TETRAHEDRAL TRUSSES

A. LEONDIS (General Dynamics Corp.)

Aug. 1983

LAR-12815

Vol. 7, No. 3, P. 312

Tetrahedral-lattice structure exhibits great complexity in mathematical analysis, and complexity quickly increases with number of elements. Solutions for static and dynamic behavior of structure obtained with model consisting of analogous structure with fewer repeating elements. Advantage of continuum models is analytic solutions can be obtained, either in closed form or in relatively-tractable Taylor series.

B83-10069

IMPROVING A GUARDED HOTPLATE

D. CHAFEY (Lockheed Missiles & Space Co.) and G. C. HENNESSEE (Lockheed Missiles & Space Co.)

Aug. 1983

MSC-20447

Vol. 7, No. 3, P. 312

Modified outer guard ring heated more uniformly. Outer guard ring includes six compressible sheets of thin fibrous-ceramic paper that form thermal barrier to outward heat flow. Ceramic paper presses heating coils against ring allowing ring to be more uniformly heated.

B83-10070

TASK BOARD TESTS MANIPULATOR PERFORMANCE

J. W. HILL (SRI International)

Aug. 1983

NPO-15150

Vol. 7, No. 3, P. 313

Task board constructed to facilitate time-and-motion studies for remote manipulators. Apparatus equipped with holes, objects of various shapes to be grasped and sensors with switches to indicate contact. Useful in industrial robots programmed to assemble parts.

B83-10071

VORTEX LIFT AUGMENTATION BY SUCTION

A. H. TAYLOR, L. R. JACKSON, and J. K. HUFFMAN

Aug. 1983

LAR-12969

Vol. 7, No. 3, P. 314

Lift performance is improved on a 60 degrees swept Gothic wing. Vortex lift at moderate to high angles of attack on highly swept wings used to improve takeoff performance and maneuverability. New design proposed in which suction of propulsion system augments vortex. Turbofan placed at down stream end of leading-edge vortex system induces vortex to flow into inlet which delays onset of vortex breakdown.

B83-10072

TIME-DOMAIN MODAL VIBRATION IDENTIFICATION

S. R. IBRAHIM (Old Dominion University Research Foundation)

Aug. 1983

LAR-12924

Vol. 7, No. 3, P. 314

Ibrahim Time-Domain modal vibration identification program (ITD) uses multiple free-decay responses of test structure directly in time domain to identify modal parameters of structure: natural frequencies, damping factors and damped mode shapes. ITD written in FORTRAN.

B83-10073**THERMAL RADIATION MODEL RENODALIZATION**

D. J. RUSSELL (Rockwell International Corp.)

Aug. 1983

MSC-20348

Vol. 7, No. 3, P. 314

Thermal Radiation Model Renodalization program redefines thermal model nodal geometry subsequent to generation of radiation interchange data. Program readily used with TRASYS thermal radiation program and SINDA thermal analyzer program. Program written in FORTRAN V.

B83-10074**MONTE CARLO INVESTIGATION OF TRAJECTORIES**

A. B. GLASS (Computer Sciences Corp.)

Aug. 1983

GSC-12705

Vol. 7, No. 3, P. 315

Monte Carlo Investigation of Trajectory Operations and Requirements (MONITOR) program performs spacecraft mission maneuver simulations for craft mission maneuver simulations for geosynchronous single-maneuver, and comet encounter trajectories. Used primarily to study geosynchronous missions and model trajectories of satellites deployed by Space Shuttle. Program written in FORTRAN IV.

B83-10075**CODE SOLVES THREE-DIMENSIONAL NAVIER-STOKES EQUATIONS**

P. THOMAS (Lockheed Missiles and Space Co.)

Aug. 1983

LAR-12862

Vol. 7, No. 3, P. 315

Set of computer codes solves three-dimensional Navier-Stokes equations for flow over nonaxisymmetric nozzles. Codes compute internal and external viscous flowfield about isolated nozzle, so flow characteristics and performance of three-dimensional jet engine exhaust nozzles can be predicted. Programs written in FORTRAN IV and ASSEMBLER.

B83-10076**SHOCK FREE AIRFOIL CASCADES**

D. S. DULIKRAVICH (Universities Space Research Association)

Aug. 1983

LEW-13842

Vol. 7, No. 3, P. 316

The CAS22 computer program developed to provide for fast design and analysis of shock free airfoil cascades. CAS22 applicable to aerodynamic analysis and transonic shock free redesign of existing two-dimensional cascades of airfoils. Program is written in FORTRAN IV.

B83-10077**PREDICTING AIRCRAFT NOISE LEVELS**

B. J. CLARK

Aug. 1983

LEW-13778

Vol. 7, No. 3, P. 316

Computer program developed for predicting aircraft noise levels either in flight or in ground tests. Noise sources include fan inlet and exhaust jet flap (for powered lift), core (combustor), turbine and airframe. Program written in FORTRAN IV.

B83-10078**MINIMUM INDUCED DRAG OF NONPLANAR WINGS**

T. J. KU (Old Dominion University Research Foundation) and J. M. KUHLMAN (Old Dominion University Research Foundation)

Aug. 1983

LAR-12925

Vol. 7, No. 3, P. 316

DRG program incorporates numerical optimization technique for calculating bound-circulation distribution required for minimum induced drag of nonplanar wings. DRG written in FORTRAN IV.

B83-10079**WING SUBSONIC AERODYNAMIC PERFORMANCE ES-****TIMATES**

H. W. CARLSON (Kentron International) and K. B. WALKLEY (Kentron International)

Aug. 1983

LAR-12987

Vol. 7, No. 3, P. 317

Solution by iteration estimates performance of twisted and cambered wings of arbitrary planform. SUBAER based on linearized theory lifting-surface solution provides spanwise distribution of theoretical leading edge thrust, in addition to surface distribution of perturbation velocities. Program written in FORTRAN IV.

B83-10080**BOUNDARY-LAYER EQUATIONS FOR TWO-DIMENSIONAL AND AXISYMMETRIC FLOW**

J. E. HARRIS and D. K. BLANCHARD

Aug. 1983

LAR-13015

Vol. 7, No. 3, P. 317

In program coupled, iterative implicit finite-difference procedure solves system of equations for laminar transitional or turbulent boundary-layer flows. Program written in FORTRAN IV.

B83-10081**FAST GENERATION OF BOUNDARY-CONFORMING O-TYPE GRIDS**

D. S. DULIKRAVICH

Aug. 1983

LEW-13818

Vol. 7, No. 3, P. 317

Algorithm generates grids for arbitrary wing-body and axial turbomachinery geometries. GRID30 based on using analytic function to generate twodimensional grids on number of coaxial axisymmetric surfaces positioned between centerbody and outer radial boundary. Program written in FORTRAN IV.

B83-10082**CALCULATING THE VORTEX LIFT EFFECT OF CAMBERED WINGS**

C. E. LAN (University of Kansas Center for Research, Inc.) and J. F. CHANG (University of Kansas Center for Research, Inc.)

Aug. 1983

LAR-12985

Vol. 7, No. 3, P. 318

Computer program VORCAM calculates vortex-lift effect of cambered wings by suction analogy. Based on improved version of Woodward's chord plane aerodynamic panel method for subsonic and supersonic flow. Developed specifically for cambered wings exhibiting edge-separated vortex flow, including those with leading-edge vortex flaps. Program written in FORTRAN IV.

B83-10168**ELECTRONIC DILATOMETER**

C. R. STROOPE (Hughes Aircraft Co.), G. S. PLEWS (Hughes Aircraft Co.), and J. ERMILICH (Hughes Aircraft Co.)

Oct. 1983

GSC-12738

Vol. 7, No. 4, P. 419

Nonclamping micrometer measures small strains. Electronic dilatometer measures minute dimensional changes caused by moisture absorption in graphite/epoxy composites. Instrument handles sample 6 inches (15 cm) long and has strain resolution of 0.1 micro-inch/inch (0.1 micron/meter). Possible to predict humidity-induced dimensional changes in items constructed of sample material.

B83-10169**TORQUE COMPENSATOR FOR MIRROR MOUNTINGS**

S. D. HOWE (Hughes Aircraft Co.)

Oct. 1983

GSC-12742

Vol. 7, No. 4, P. 420

Device nulls flexural distributions of pivotal torques. Magnetic compensator for flexing pivot torque consists of opposing fixed and movable magnet bars. Magnetic torque varies nonlinearly as function of angle of tilt of movable

bar. Positions of fixed magnets changed to improve magnetic torque linearity.

B83-10170
CONTROLLING HEAT-EXCHANGER OUTLET TEMPERATURE

C. M. DANIELS (Rockwell International Corp.)

Oct. 1983

MFS-19667

Vol. 7, No. 4, P. 421

Nearly constant temperature maintained regardless of fluid flow. Mixing heated and unheated fluids ensures constant temperature at outlet of heat exchanger. Main stream fluid heated, and bypass fluid unheated. Devised to maintain constant-temperature output under varying flow rates. Used with fluids other than liquid oxygen - water for example.

B83-10171
VIBRATION-ISOLATION BENCH FOR TESTING IN VACUUM

J. C. DANKOWSKI (Hughes Aircraft Co.)

Oct. 1983

GSC-12753

Vol. 7, No. 4, P. 421

Precise optical systems tested without contamination. Vibration isolator is one of three such units supporting cast-iron table. Table used to test optical systems in vacuum. Isolator made from commercially available components. Scaled-down version finds wider application in electron optics or electron-beam lithography.

B83-10172
ELECTRONIC FORCE GAGE FOR WELDERS

J. W. BRADLEY (Honeywell, Inc.) and G. GATES (Honeywell, Inc.)

Oct. 1983

MFS-25798

Vol. 7, No. 4, P. 423

Welding force monitored in process. Electronic force gage uses strain gage on deformable member. Oscilloscope trace of welding force photographed and compared with standard trace during calibration and troubleshooting of resistance welding equipment. Adaptable to small scale resistance welding in electronics industry.

B83-10173
SWIRL DIFFUSER

W. E. SIMON (Martin Marietta Corp.)

Oct. 1983

MSC-18996

Vol. 7, No. 4, P. 423

Gas diffuser, based on swirling flow, dissipates incoming gas velocity in relatively short distance. Pinwheel nozzle welded to end of inlet pipe creates swirling flow. Diffuser essentially open pipe with pinwheel nozzle, pressure drop in diffuser almost same as open pipe. Applications include fuel burners in room inlets for heating and air-conditioning, and carburetors for internal-combustion engines.

B83-10174
LEAK TESTER FOR CRYOGENIC FLOWLINES

G. D. MORTENSEN (Rockwell International Corp.), J. N. OLNEY (Rockwell International Corp.), and J. M. MARDESIC (Rockwell International Corp.)

Oct. 1983

MSC-20233

Vol. 7, No. 4, P. 425

Gas chromatography measures leakage into cavity surrounding joint under test. System surrounds joint being tested with sealed cavity. Presence of leakage gas in cavity monitored by gas chromatograph. Leakage rate found by multiplying relative leakage gas concentration by mass flow rate of purge as into cavity.

B83-10175
CALCULATING STATIC-SEAL LEAKAGE CORRELATION

C. M. DANIELS (Rockwell International Corp.) and M. E. BURR (Rockwell International Corp.)

Oct. 1983

MFS-19674

Vol. 7, No. 4, P. 426

Operational leakage rates of various working fluids predicted from test data. Method converts leakage through fixed area flow passage from one set of fluid conditions to another. Correction factor improves correlation of measured engine static seal leak rate under test conditions with rate under operating conditions. Potential applications include extrapolating from test conditions to operating condition.

B83-10176
DIELECTRIC SCANNING LOCATES VOIDS IN GLASS FOAM

P. M. GAMMELL (CALTECH)

Oct. 1983

NPO-15728

Vol. 7, No. 4, P. 426

Capacitive probes succeed where X-ray and ultrasonic equipment do not. Crossbar switching of pairs of conductors enables detection of dielectric inhomogeneities in selected small volume elements of slab of material. Large void in sample detected as low capacitance reading for volume element containing void. Applicable in nondestructive testing of other dielectric objects for internal defects that exhibit dielectric inhomogeneities.

B83-10177
EDDY-CURRENT DAMAGE TEST FOR CARBON COMPOSITES

A. B. HAMILTON (Vought Corp.)

Oct. 1983

MSC-20358

Vol. 7, No. 4, P. 428

Nondestructive test method detects cracks in materials of low conductivity. Test setup includes eddycurrent unit with frequency of 2 to 20 MHz/ and storage oscilloscope. High frequency required to assure depth of penetration less than substrate thickness, to prevent thickness from influencing reading. Eddy-current analysis confirmed by visual inspection as damaged area was sectioned and evaluated.

B83-10178
MANOMETER MEASURES GAS FLOW

J. J. ROWLETTE (CALTECH)

Oct. 1983

NPO-15686

Vol. 7, No. 4, P. 428

Simple apparatus measures time required for gas to displace known volume of water. Apparatus determines amount of gas generated in lead/acid cell during charging by measuring time required for gas to displace measured volume of water between marks in slanted manometer.

B83-10179
J-CHANNEL LOCKS POTTING TO COMPRESSION PANEL

D. M. ROYSTER and W. A. SHEARIN JR.

Oct. 1983

LAR-12913

Vol. 7, No. 4, P. 429

Panel ends supported to prevent edge failure during testing. J-Channels attached to panel ends form mechanical lock with pottting compound during elevated temperature tests. Not needed during room-temperature tests.

B83-10180
MEASURING SURFACE-SHEAR STRESS IN A WIND TUNNEL

F. LEMOS and H. HIGUCHI (Dynamics Technology, Inc.)

Oct. 1983 See Also NASA TM-78531(N79-14330/NSP)

ARC-11384

Vol. 7, No. 4, P. 430

Two-wire skin friction gage gives both magnitude and direction of mean and fluctuating stresses. Heated wires lie at surface of gage, measure airflow by cooling effect. Wires perpendicular to each other to measure flow direction as well as magnitude. Used successfully in various turbulent flow fields, including separating three-dimensional boundary layer over cone at high angle of incidence.

B83-10181
FRACTURE STRENGTH OF SILICON SOLAR CELLS

C. P. CHEN (CALTECH)

06 MECHANICS

Oct. 1983
NPO-15187

Vol. 7, No. 4, P. 431

Tests during processing show way to reduce breakage and increase yield. Silicon wafer twisted by four equally spaced dowel pins, two pushing up and two pushing down. Uniform shear stress found along line 45 degrees from axes of two load pairs. Test helping to develop reliable information on nature and source of flows causing cell fracture.

B83-10182 ESTIMATING DESIGN LOADS IN COUPLED VIBRATING STRUCTURES

M. R. TRUBERT (CALTECH), M. A. SALAMA (CALTECH), and R. M. BAMFORD (CALTECH)

Oct. 1983 See Also JPL Publication 79-2 (N79-20177/NSP)

NPO-14872 Vol. 7, No. 4, P. 432

Approximate spectral analysis faster and less expensive than transient analysis. Method of vibration analysis combines separate modes of spacecraft and launcher to determine approximate conditions for resonance. Useful for analysis of any complex structure made up of substructures not coupled too closely; however important to note, method includes effect of dynamic impedance between launcher and payload.

B83-10183 MULTIVALUED-VELOCITY-FIELD MODEL OF TURBULENCE

M. A. ZAK (CALTECH)

Oct. 1983

NPO-15748 Vol. 7, No. 4, P. 432

Report presents multi-valued-velocity model used in calculations of turbulence formation. Developed as part of continuing study of turbulent fluid motion, model expected to evolve into comprehensive mathematical tool to explain origin and effects of turbulence. Model has great theoretical and practical value in such fields as aerodynamics, meteorology, and combustion.

B83-10184 METHODS FOR ESTIMATING PAYLOAD/VEHICLE DESIGN LOADS

J. C. CHEN (Caltech), J. A. GARBA (Caltech), M. A. SALAMA (Caltech), and M. R. TRUBERT (Caltech)

Oct. 1983

NPO-15550 Vol. 7, No. 4, P. 433

Several methods compared with respect to accuracy, design conservatism, and cost. Objective of survey: reduce time and expense of load calculation by selecting approximate method having sufficient accuracy for problem at hand. Methods generally applicable to dynamic load analysis in other aerospace and other vehicle/payload systems.

B83-10185 DISSOCIATED AIRFLOW EFFECTS DURING PLASMA-ARC TESTING

B. A. MILLER (Rockwell International Corp.) and J. A. BERTANI (Rockwell International Corp.)

Oct. 1983

MSC-20522 Vol. 7, No. 4, P. 434

Program computes heating rates and surface friction effects. COLDARC predicts heating rate and surface friction on test article during plasmaarc testing. Uses simplified frozen-flow model to represent dissociated airflow and predict heat flux and surface friction, including effects of retarded atomic recombination from test facility data. COLDARC written in FORTRAN IV.

B83-10186 SOLUTIONS OF TRANSONIC FLOW IN TURBOMACHINES

S. STAHARA (Nielson Engineering & Research, Inc.), J. ELLIOTT (Nielson Engineering & Research, Inc.), and J. SPRETTER (Nielson Engineering & Research, Inc.)

Oct. 1983
LEW-13896

Vol. 7, No. 4, P. 434

Accurate approximation obtained using perturbation techniques. Perturbation procedures determine highly accurate approximations to families of nonlinear solutions either continuous or discontinuous and represent variations in some arbitrary parameter. Program written in FORTRAN IV.

B83-10187 TRANSONIC, AXISYMMETRIC FLOW OVER NOZZLE AFTERBODIES WITH SUPERSONIC JET EXHAUSTS

R. G. WILMOTH

Oct. 1983

LAR-12957 Vol. 7, No. 4, P. 434

Predictions require less computation than Navier-Stokes solutions. RAXJET computer program predicts transonic, axisymmetric flow over nozzle afterbodies with supersonic jet exhausts and includes effects of boundary layer displacement, separation, jet entrainment, and inviscid jet plume blockage. RAXJET written in FORTRAN IV.

B83-10188 COMPRESSIBLE STABILITY ANALYSIS CODE FOR TRANSITION PREDICTION IN THREE DIMENSIONAL BOUNDARY LAYERS.

M. R. MALIK (High Technology Corp.)

Oct. 1983

LAR-13042 Vol. 7, No. 4, P. 435

COSAL employs finite-difference method to solve compressible stability equations in original form. Code includes two eigenvalue search procedures. Global procedure provided for use when no initial guess available. Fast local eigenvalue search procedure provided for use when good initial guess available. COSAL written in FORTRAN IV.

B83-10189 STEADY, NONROTATING, BLADE-TO-BLADE POTENTIAL TRANSONIC CASCADE FLOW ANALYSIS CODE

D. S. DULIKRAVICH

Oct. 1983

LEW-13854 Vol. 7, No. 4, P. 436

CAS2D computer program numerically solves artificially time-dependent form of actual full potential equation, providing steady, nonrotating, blade-to-blade potential transonic cascade flow analysis code. CAS2D written in FORTRAN IV.

B83-10190 PANEL CODE FOR PLANAR CASCADES

E. R. MCFARLAND

Oct. 1983

LEW-13862 Vol. 7, No. 4, P. 436

Plane cascade flow solved using improved surface-singularity methods. Current external aerodynamic integral-equation techniques adapted for use in internal flow calculation. Inherent computational speed and flexibility of integral equation solutions make them useful for design calculations.

B83-10191 DESIGN OF MULTISTAGE AXIAL-FLOW COMPRESSORS

J. E. CROUSE and W. T. GORRELL (U.S. Army Aviation Research and Development Command)

Oct. 1983

LEW-13505 Vol. 7, No. 4, P. 436

Program developed for computing aerodynamic design of multistage axialflow compressor and associated blading geometry input for internal flow analysis. Aerodynamic solution gives velocity diagrams on selected streamlines of revolution at blade row edges. Program written in FORTRAN IV.

B83-10192 EXTENDED VORTEX LATTICE METHOD

J. E. LAMAR and H. E. HERBERT (Computer Sciences Corp.)
Oct. 1983

LAR-13039 Vol. 7, No. 4, P. 437

Extended NASA Langley Vortex Lattice Method computer program VLM, estimates subsonic aerodynamic characteristics of up to four complex planforms. Planforms include wings with variable-sweep outer panels, wings with several changes in dihedral angle across span, wings with winglets, and wing (or wings) in conjunctions with tail and/or canard. VLM written in FORTRAN IV.

B83-10193
SUBCRITICAL WING DESIGN CODE

J. M. KUHLMAN (Old Dominion University Research Foundation) and J. Y. SHU (Old Dominion University Research Foundation)
Oct. 1983

LAR-12959 Vol. 7, No. 4, P. 437

QUICK Interactive Graphics Analysis program, QUIAGA, displays aircraft QUICK-geometry data to aid in detection and analysis of errors. Program generates completely-analytical aircraft geometry description for use by finite difference flow codes. QUIAGA written in FORTRAN IV.

B83-10194
INTERACTIVE GRAPHICS ANALYSIS FOR AIRCRAFT DESIGN

J. C. TOWNSEND
Oct. 1983

LAR-12951 Vol. 7, No. 4, P. 437

Program uses higher-order far field drag minimization. Computer program WDES WDEM preliminary aerodynamic design tool for one or two interacting, subsonic lifting surfaces. Subcritical wing design code employs higher-order far-field drag minimization technique. Linearized aerodynamic theory used. Program written in FORTRAN IV.

B83-10195
OFF-DESIGN TURBINE MODELING

G. L. CONVERSE (General Electric Co.)
Oct. 1983

LEW-13674 Vol. 7, No. 4, P. 438

Off-design efficiency and flow function obtained from design point input data. Computer program PART improved method of representing turbine component when performing calculations of off-design-point data to total efficiency over range of pressure ratios and speeds specified by user. PART written in FORTRAN IV.

B83-10196
AXIAL COMPRESSOR DESIGN AND ANALYSIS

J. G. WILLIAM and R. M. HEARSAY (University of Dayton)
Oct. 1983

LEW-13488 Vol. 7, No. 4, P. 438

Program yields blade configurations and aerodynamic flow fields. Program consists of three sections -- two blade design sections and aerodynamic section. Program structured that one section used alone, or aerodynamic section used in conjunction with either or both of blading sections. Program written in FORTRAN IV.

B83-10373
MEMBRANE SWITCHES CHECK SEAL PRESSURE

P. J. HODGETTS (Rockwell International Corp.), F. H. STUCKENBERG (Rockwell International Corp.), and E. T. MORRISSEY (Rockwell International Corp.)
Apr. 1984

MSC-20468 Vol. 8, No. 1, P. 75

Array of flexible membrane switches used to indicate closure of seal. Switch membrane responds to pressure exerted by rigid surface on compliant sealing medium and provides switch contacts monitored electronically. Membrane switches connected in series and placed under seal. When all switches are closed lamp or LED lights up,

indicating requisite seal pressure has been realized at all switch positions. Principle used to ensure integrity of seals on refrigerator and oven doors, weatherstripping, hatches, spacecraft, airplanes, and submarines.

B83-10374
EDDY-CURRENT INSPECTION OF NARROW METAL TUBES

H. H. AMBROSE (Rockwell International Corp.), R. E. KLEINT (Rockwell International Corp.), and K. E. KIRKHAM (Rockwell International Corp.)
Apr. 1984

MFS-19742 Vol. 8, No. 1, P. 76

Inspection technique for narrow-bore metal tubing involves use of small internal eddy-current probe. Probe consists of thin copper wire wrapped on bobbin. Probe small enough to pass through bends in tube being measured. Technique useful for strain measurements where operating conditions or inaccessibility prevent use of such conventional methods as X-ray diffraction, electrical-resistance measurements, strain gages, or holography.

B83-10375
ACOUSTIC DESIGN IMPROVES COMPOSITE IMPACT RESISTANCE

J. S. HEYMAN
Apr. 1984

LAR-12887 Vol. 8, No. 1, P. 76

Improved tolerance of composites to impact damage achieved using acoustic response model to characterize dynamics of damage mechanism. Model based on assumption that in addition to classical mechanical properties, damage mechanism depends on acoustic properties of composite material. Use of model results in more-impact-resistant composite structure.

B83-10376
CRYOGENIC PRESSURE SEAL FOR WIRES

J. J. CIANA (Rockwell International Corp.)
Apr. 1984

MFS-19668 Vol. 8, No. 1, P. 77

High-pressure-seal formed by forcing polyurethane into space surrounding wire or cable in special fitting. Wire or cable routed through fitting then through a tightly fitting cap. Wire insulation left intact. Cap filled with sealant and forced onto the fitting; this pushes sealant into fitting so it seals wire or cable in fitting as well as in cap.

B83-10377
SIMULATING ATMOSPHERIC TURBULENCE

F. B. TATOM (Engineering Analysis, Inc.) and S. R. SMITH (Engineering Analysis, Inc.)
Apr. 1984

MFS-25850 Vol. 8, No. 1, P. 78

Dimensionless time series for gusts and gradients calculated with model. Single-sided one-dimensional spectra obtained from Fourier analysis of simulated vertical gust. Each of four plots represents spectrum in one of four altitude bands ranging from 0 to 10 km. Model differs from most models; is nondimensional for greater generality and uses spectra with finite wave number limits. Developed to predict effects of atmospheric turbulence in horizontal and near-horizontal flight also applicable to commercial aviation.

B83-10378
ATTACHING STRAIN GAGES TO COMPOSITE MATERIALS

B. PENN, J. M. CLEMONS, F. LEDBETTER III, and W. WHITE
Apr. 1984

MFS-25867 Vol. 8, No. 1, P. 78

Polyurethane adhesive bonds strain gages reliably to graphite/epoxy composites. Adhesive easy to apply, used over wide temperature range (ambient to cryogenic), and applied in short time. Tests on gages bonded to composite with adhesive demonstrated reliability of attachment.

06 MECHANICS

B83-10379

SUPPRESSING TRANSIENT SIDE LOADS IN SUPER-SONIC NOZZLES

W. R. WAGNER (Rockwell International Corp)

Apr. 1984

MFS-19769

Vol. 8, No. 1, P. 79

Fins added to nozzle wall. Fins protrude from rocket nozzle wall at equal intervals about circumference. Inhibit circumferential growth of local flow separations, reducing sideways vibration of nozzle. Transient-suppressing fins helpful in rocket nozzles, jet engines, gas turbines, laser nozzles, flow diffusers, flow separators and other devices with supersonic flows.

B83-10380

TOOL RELEASES OPTICAL ELEMENTS FROM SPRING BRACKETS

J. S. GUM

Apr. 1984

GSC-12794

Vol. 8, No. 1, P. 79

Threaded hooks retract bracket arms holding element. Tool uses three hooks with threaded shanks mounted in ring-shaped holder to pull on tabs to release optical element. One person can easily insert or remove optical element (such as prism or lens) from spring holder or bracket with minimal risk of damage.

B83-10381

STABILITY TEST FOR TRANSIENT-TEMPERATURE CALCULATIONS

W. CAMPBELL

Apr. 1984

MFS-25803

Vol. 8, No. 1, P. 80

Graphical test helps assure numerical stability of calculations of transient temperature or diffusion in composite medium. Rectangular grid forms basis of two-dimensional finite-difference model for heat conduction or other diffusion like phenomena. Model enables calculation of transient heat transfer among up to four different materials that meet at grid point.

B83-10382

LIQUID-NITROGEN TEST FOR BLOCKED TUBES

W. R. WAGNER (Rockwell International Corp.)

Apr. 1984

MFS-19762

Vol. 8, No. 1, P. 81

Nondestructive test identifies obstructed tube in array of parallel tubes. Trickle of liquid nitrogen allowed to flow through tube array until array accumulates substantial formation of frost from moisture in air. Flow stopped and warm air introduced into inlet manifold to heat tubes in array. Tubes still frosted after others defrosted identified as obstructed tubes. Applications include inspection of flow systems having parallel legs.

B83-10383

SHEAR-PANEL TEST FIXTURE ELIMINATES CORNER STRESSES

J. J. KISS, G. L. FARLEY (Army Aviation Research and Development Command), and D. J. BAKER (Army Aviation Research and Development Command)

Apr. 1984

LAR-12930

Vol. 8, No. 1, P. 82

New design eliminates corner stresses while maintaining uniform stress across panel. Shear panel test fixture includes eight frames and eight corner pins. Fixture assembled in two halves with shear panel sandwiched in between. Results generated from this fixture will result in good data base for design of efficient aircraft structures and other applications.

B83-10384

HEAT-PIPE THERMAL SWITCH

S. OLLENDORF

Apr. 1984

GSC-12644

Vol. 8, No. 1, P. 83

New design isolates components from vibrations. Heat-pipe thermal switch controls temperature of heat source. Ball-and-socket guide rods and bellows allow relative motion of source and its heat sink and protect source from vibrations. Designed for cooling vibration-sensitive electronic components.

B83-10385

FLOW-STRAIGHTENER SLEEVE FOR PUMP VALVE

J. TOLPEN (Rockwell International Corp.)

Apr. 1984

MFS-19781

Vol. 8, No. 1, P. 84

Flow-straightening sleeve contains vanes in modified honeycomb pattern. Each vane curved fluid-dynamic wing that helps straighten and smooth out flow of fluid passing over it. Sleeve performs more reliably and quietly, possibility of damage to internal valve parts greatly reduced, valve life expectancy increased and time between overhauls extended.

B83-10386

ISOLATING SUPPORTS FOR X-RAY MIRRORS

L. M. COHEN (Smithsonian Astrophysical Observatory)

Apr. 1984

MFS-25904

Vol. 8, No. 1, P. 85

Simple concept reduces effects of gravity, temperature and magnetism. Single circumferential ring supports fused-quartz mirror in high-resolution x-ray telescope. Adaptable to such terrestrial instruments as imaging devices and spectroscopes.

B83-10387

ELECTRONICALLY-SCANNED PRESSURE SENSORS

C. F. COE, G. T. PARRA, and R. C. KAUFFMAN

Apr. 1984

ARC-11361

Vol. 8, No. 1, P. 86

Sensors not pneumatically switched. Electronic pressure-transducer scanning system constructed in modular form. Pressure transducer modules and analog to digital converter module small enough to fit within cavities of average-sized wind-tunnel models. All switching done electronically. Temperature controlled environment maintained within sensor modules so accuracy maintained while ambient temperature varies.

B83-10388

CRYSTAL MICROBALANCE MONITORS RELATIVE HUMIDITY

L. C. YANG (CALTECH)

Apr. 1984

NPO-15493

Vol. 8, No. 1, P. 87

Sensor monitors water evaporation in industrial drying processes. Measured adsorption isotherm for instrument essentially linear over entire range of relative humidity. Testing at each temperature setting less than half hour for full relative-humidity range, with estimated frequency response time less than 10 seconds. Used to measure relative humidity of ambient atmosphere near drying paper, food textile fabrics and pulp to optimize water-drying portion of processing cycle.

B83-10389

SURFACE-MOISTURE MONITORING TECHNIQUE

L. C. YANG (CALTECH)

Apr. 1984

NPO-15494

Vol. 8, No. 1, P. 88

Technique monitors drying of continuous sheets of thin material. Ribbon sensing element samples moisture content of web material during each rotation of roller. Change in resistivity of thermally and electrically conductive ribbon is parameter used to measure web moisture; measurements insensitive to ribbon contact pressure. Application in industrial production of sheet materials such as paper and fabric.

B83-10390**LOCOMOTIVE TRUCK DYNAMICS**

R. L. BERRY (Martin Marietta Corp.) and F. E. BARONE (Martin Marietta Corp.)

Apr. 1984 See Also NASA CR-81-577 (N82-28224/NSP)

MFS-25872 Vol. 8, No. 1, P. 89

Commonly-used locomotive trucks tested to study and improve ride safety. Federal Railroad Administration and National Aeronautics and Space Administration jointly initiated program to study locomotive truck dynamics to improve operation safety. Final report summarizes program and truck and component tests.

B83-10391**RADIAL-CASCADE ANALYSIS**

S. Y. MENG (Rockwell International Corp.)

Apr. 1984

MFS-19752 Vol. 8, No. 1, P. 89

Conformal mapping transforms radial cascade to axial cascade. Report describes analysis of pressure distributions on radial diffuser geometries within Space Shuttle main and preburner pumps. Analysis uses modified version of Douglas-Neuman (D-N) procedure for two-dimensional axial cascades.

B83-10392**CRASH SIMULATION AND NONLINEAR STRUCTURAL ANALYSIS**

M. P. KAMAT (Virginia Polytechnic Institute and State University)

Apr. 1984

LAR-12926; LAR-12927 Vol. 8, No. 1, P. 90

Behavior of structures composed of trusses, frames and membranes modeled. Crash simulation analysis useful in developing understanding of multifaceted relationship between complex structural configuration, such as aircraft, and response during crash. CDC version written in FORTRAN IV.

B83-10393**PANEL ANALYSIS AND SIZING CODE**

M. S. ANDERSON, W. J. STROUD, B. J. DURLING, T. R. RAU, K. W. HENNESSY, W. H. GREENE, and C. G. LOTT (Kentron International, Inc.)

Apr. 1984

LAR-13004; LAR-13164 Vol. 8, No. 1, P. 90

Program valuable in analyzing and sizing filamentary composite panels. Panel Analysis and Sizing code (PASCO) for buckling and vibration analysis and sizing of prismatic structure having arbitrary cross section primarily intended for analyzing and sizing stiffened panels made of laminated orthotropic materials. PASCO written in FORTRAN IV.

B83-10394**QUICK INTERACTIVE GRAPHICS ANALYSIS**

J. C. TOWNSEND

Apr. 1984

LAR-12952 Vol. 8, No. 1, P. 91

Cross-section and body-line plots generated for error detection and analysis. FORTRAN 77 version of QUICK Interactive Graphics Analysis program QUIAGA, performs same operations as FORTRAN IV counterpart. QUIAGA displays aircraft QUICK geometry data to aid in detection and analysis of errors. QUICK-geometry data used to generate completely analytical aircraft geometry description for finite difference flow codes. QUIAGA program written in FORTRAN 77.

B83-10395**TRANSONIC AIRFOIL ANALYSIS**

T. L. HOLST, F. C. DOUGHERTY, K. L. GUNDY (Informatics, Inc.), S. D. THOMAS (Informatics, Inc.), J. FRICK (Informatics, Inc.), A. FERNQUIST (Informatics, Inc.), and J. ALBERT (University of Santa Clara)

Apr. 1984

ARC-11436 Vol. 8, No. 1, P. 91

Program uses fast iteration scheme for solving transonic flow field around arbitrary airfoils. Transonic Airfoil Analysis Computer Code, TAIR, employs fast, fully implicit algorithm to solve conservative full-potential equation for steady transonic flow field about arbitrary airfoil immersed in subsonic free stream. TAIR written in FORTRAN IV.

B83-10396**GENERAL AVIATION SYNTHESIS PROGRAM**

T. GALLOWAY, E. SCHAIRER, J. BOWLES, and M. WATERS

Apr. 1984

ARC-11434 Vol. 8, No. 1, P. 91

Program performs preliminary design of fixed-wing aircraft. Emphasis placed on fixed wing aircraft with propulsion systems varying from single piston engine with fixed-pitch propeller through twin turbo-prop/turbofan systems used in business or transport aircraft. GASP written in FORTRAN IV.

B83-10397**MONITORING THE THICKNESS OF COAL-CONVERSION SLAG**

J. V. WALSH (CALTECH)

Apr. 1984

NPO-15371 Vol. 8, No. 1, P. 92

Technique adapts analogous ocean-floor-mapping technology. Existing ocean floor acoustic technology adapted for real-time monitoring of thickness and viscosity of flowing slag in coal-conversion processing.

B83-10398**MEASURING COATING THICKNESS**

A. SCHAFFER (Honeywell, Inc.) and D. GATES (Honeywell, Inc.)

Apr. 1984

MFS-25633 Vol. 8, No. 1, P. 92

Gage measures coating thickness in holes. Gage for quickly determining coating thickness in holes on printed circuit board also used to size small holes in other applications.

B83-10399**SELF-RIGHTING OBJECTS**

J. D. BURKE (CALTECH)

Apr. 1984

NPO-15023 Vol. 8, No. 1, P. 92

Book-shaped object always springs open with 'pages' upward. Technique devised for righting small spacecraft after landing applied terrestrially in transmitters for rescue beacons.

B83-10400**PREDICTING THERMAL CONDUCTIVITY**

B. PENN, F. LEDBETTER III, and J. CLEMENS

Apr. 1984

MFS-25732 Vol. 8, No. 1, P. 93

Empirical equation predicts thermal conductivity of composite insulators consisting of cellular, granular or fibrous material embedded in matrix of solid viscoelastic material. Application in designing custom insulators for particular environments.

B83-10401**PASSIVE MODULE FOR CRYOGENIC REFRIGERATION**

W. BROOKS and P. KITTEL (National Research Council)

Apr. 1984

ARC-11263 Vol. 8, No. 1, P. 93

Refrigeration module with no moving parts attaches to cold plate of cryostat to reduce temperature. Module includes evaporation chamber, condenser and absorption pump.

B83-10402**DETERMINING AIRCRAFT ALTITUDE**

J. J. LORRE (CALTECH)

06 MECHANICS

Apr. 1984

NPO-15386

Vol. 8, No. 1, P. 93

Altitude of aircraft determined rapidly from comparison of digital pictures of ground taken at different times or with different exposure times.

B83-10403

DETERMINING FROST DEPTH AND DENSITY

F. HUNEDI

Apr. 1984

MFS-25754

Vol. 8, No. 1, P. 93

Quick determination of frost depth and density obtained without using cumbersome tools or calculations.

B83-10404

REMOTELY-ADJUSTABLE PRESSURE-CONTROL VALVE

R. B. MORROW (CALTECH)

Apr. 1984

NPO-15693

Vol. 8, No. 1, P. 93

Hydraulic valve designed for controlling high-pressure fluid stream with low-pressure gas for fluid includes free-floating cylindrical control piston.

B83-10405

RAIN AND DEW DETECTOR

E. G. LAUE (CALTECH)

Apr. 1984

NPO-15370

Vol. 8, No. 1, P. 93

Multifinger transducer actuates simple circuit that sets off alarm when moisture bridges fingers.

B83-10406

MODIFIED OSCILLOGRAPH FOR IMPACTING COMPOSITE MATERIALS

B. PENN, F. LEDBETTER III, J. M. CLEMONS, J. DANIELS, and W. WHITE

Apr. 1984

MFS-25901

Vol. 8, No. 1, P. 94

Commercial oscillograph imparts impact energy to elastomeric materials modified to perform same function on composites.

B83-10602

LIQUID-DROPLET RADIATIVE COOLER

K. K. KNAPP (Astro Research Corp.)

Nov. 1984

MFS-25890

Vol. 8, No. 2, P. 225

Large-area, low-mass radiative cooler applicable to industrial processes requiring non-contacting cooling of process fluids. Droplet-stream radiators are used to radiate away waste heat. Extensive development required to produce practical system for terrestrial use. Effects of gravity and atmosphere are to be evaluated.

B83-10603

MINIATURE AIRFLOW SENSOR

D. D. KERSHNER

Nov. 1984

LAR-13065

Vol. 8, No. 2, P. 226

Miniature flow-angle and airspeed sensor quickly mounted on light aircraft wing with two-sided tape since conventional sensors are restricted to large aircraft. Sensor operates as free-trailing wind vane self-aligning in airstream through two independent axes. Vane attached to wing surface through hollow mounting boom that fits on mounting plate attached to wing with two-sided neoprene-foam tape. Method shown strong enough for loads of low-speed flight.

B83-10604

AUTOMATED MERCURY DILATOMETER

S. D. HONG (CALTECH) and V. H. CULLER (CALTECH)

Nov. 1984

NPO-14884

Vol. 8, No. 2, P. 227

Task of reading and recording indications of mercury dilatometer simplified by automatic system. Volume change of sample under test converted into electrical signal. Device

modified by addition of resistance wire to mercury column. Height of column read indirectly by measuring resistance between terminals. Signal suitable for strip-chart recording or other processing.

B83-10605

WATERPROOF RAISED FLOOR MAKES UTILITY LINES ACCESSIBLE

M. M. COHEN

Nov. 1984

ARC-11363

Vol. 8, No. 2, P. 228

Floor for laboratories, hospitals and factories waterproof yet allows access to subfloor utilities. Elevated access floor system designed for installations with multitude of diverse utility systems routed under and up through floor and requirement of separation of potentially conflicting utility services. Floor covered by continuous sheet of heat resealable vinyl. Floor system cut open when changes are made in utility lines and ducts. After modifications, floor covering resealed to protect subfloor utilities from spills and leaks.

B83-10606

IN SITU MEASUREMENT OF GROUND-SURFACE FLOW RESISTIVITY

A. J. ZUCKERWAR

Nov. 1984

LAR-13053

Vol. 8, No. 2, P. 229

New instrument allows in situ measurement of flow resistivity on Earth's ground surface. Nonintrusive instrument includes specimen holder inserted into ground. Flow resistivity measured by monitoring compressed air passing through flow-meters; pressure gages record pressure at ground surface. Specimen holder with knife-edged inner and outer cylinders easily driven into ground. Air-stream used in measuring flow resistivity of ground enters through quick-connect fitting and exits through screen and venthole.

B83-10607

RADIALLY-GRADUATED

TURBINE-TEMPERATURE PROFILE

W. R. WAGNER (Rockwell International Corp.), F. P. NITZ (Rockwell International Corp.), and M. L. STRANGELAND (Rockwell International Corp.)

Nov. 1984

MFS-19831

Vol. 8, No. 2, P. 231

Proposed scheme to change temperature distribution in gas-turbine flame increases radially instead of remaining spatially uniform offers important advantages. Radially increasing temperature allows higher mean gas temperature, greater power output, higher rotational speed and longer life for blades. Principle suitable for axial-flow gas turbine directly in line with cylindrical combustor. Included in category many rocket, aircraft, stationary, and shipboard turbines.

B83-10608

LONG HEAT PIPE TRANSPORTS 2.6 KW

D. M. ERNST (Thermacore, Inc.), E. H. DUBBLE (Thermacore, Inc.), and R. L. COPENHAVER (Thermacore, Inc.)

Nov. 1984

NPO-16017

Vol. 8, No. 2, P. 231

High-capacity heat pipe employs slender artery-and-wick structure. Ribbon of stainless steel screen wrapped around copper mandrel in conical copper forming tool. Outside edge of wrapped screen welded to layer on which it rests. Long heat pipe transports thermal energy at rate of 2,600 watts at operating temperature of 923 K.

B83-10609

IDENTIFYING BOUNDARY-LAYER TRANSITIONS ON AIRCRAFT SKIN

B. J. HOLMES, C. C. CROOM, W. C. KELLIHER, and C. J. OBARA (Kentron International, Inc.)

Nov. 1984

LAR-13089

Vol. 8, No. 2, P. 232

Sublimating chemicals offer accurate, low-cost way of indicating laminar-to-turbulent flow transitions on surfaces of aircraft. Aerodynamic surfaces coated with thin film of such volatile chemical solids as naphthalene, diphenyl, acenaphthene, or fluorene. Film sublimates rapidly because of high local shear stress and heat transfer in boundary layer. Coating appears white in regions where chemical remained on surface indicating laminar flow; regions where chemical disappeared indicate turbulent flow.

B83-10610**INTEGRATED TACTILE SENSOR FOR ROBOTS**

M. H. RAIBERT (CALTECH) and R. ESKENAZI (CALTECH)
Nov. 1984

NPO-15094**Vol. 8, No. 2, P. 233**

Proposed large-scale integrated (LSI) circuit gives robots, partshandling machines, and remote-control devices sense of touch. LSI circuits, placed on contact surfaces of manipulators combine functions of transduction, computing and communicating. Beneath layer of pressure sensitive rubber, resistivity of which changes with pressure, electrodes furnish pressure-dependent signal to computation elements. Electrodes and computation elements contained in silicon integrated-circuit wafer.

B83-10611**CONTINUOUS-READING CRYOGEN LEVEL SENSOR**

F. E. BARONE (Martin Marietta Corp.), E. FOX (Martin Marietta Corp.), and S. MACUMBER (Martin Marietta Corp.)
Nov. 1984

MFS-25873**Vol. 8, No. 2, P. 234**

Two pressure transducers used in system for measuring amount of cryogenic liquid in tank. System provides continuous measurements accurate within 0.03 percent. Sensors determine pressure in liquid and vapor in tank. Microprocessor uses pressure difference to compute mass of cryogenic liquid in tank. New system allows continuous sensing; unaffected by localized variations in composition and density as are capacitance-sensing schemes.

B83-10612**GENERAL-PURPOSE ICOSAHEDRAL STRUCTURE**

J. EVANS
Nov. 1984

GSC-12854**Vol. 8, No. 2, P. 235**

Scheme based on geodesic sphere approximated by regular icosahedron. Structure rigid and lightweight. Allows access to all subsystems and equipment from outside. Regular icosahedron constructed from triangular panels. Five panels meeting at each corner all rigidly attached to fivesided adapter. Strengthened version useful on Earth for rapidly-erectable temporary shelters, industrial structures, or playground equipment.

B83-10613**LOW-THERMAL-RESISTANCE BASEPLATE MOUNTING**

W. T. PERREAULT (Martin Marietta Corp.)
Nov. 1984

MFS-25908**Vol. 8, No. 2, P. 236**

Low-thermal-resistance mounting achieved by preloading baseplate to slight convexity with screws threaded through beam. As mounting bolts around edge of base-plate tightened, baseplate and cold plate contact first in center, with region of intimate contact spreading outward as bolts tightened.

B83-10614**TEMPERATURE-AVERAGING THERMAL PROBE**

L. F. KALIL and V. REINHARDT
Nov. 1984

GSC-12795**Vol. 8, No. 2, P. 236**

Temperature-averaging thermal probe measures long-term temperature fluctuations in fluid environment. Consists of temperature probe embedded inside thermally massive material. Probe measurements used to estimate powerplant

heating and cooling loads, map temperature profiles, and calibrate more-sensitive temperature probes.

B83-10615**AUTOCOVARANCE COMPUTER**

J. F. MEYERS and T. E. HEPNER (U.S. Army Aviation Research and Development Command)

Nov. 1984

LAR-12968**Vol. 8, No. 2, P. 237**

Laser-velocimeter covariance processor calculates autocovariance and cross-covariance functions for turbulent flow field, based on Poisson-sampled measurements in time from laser velocimeter. Hardware implementation of correlation technique to laser velocimeter flow-field diagnostic system fast enough for online production applications.

B83-10616**PREDICTING NOISE IN COMPLEX AIRCRAFT STRUCTURES**

J. F. UNRUH (Southwest Research Institute) and D. C. SCHEIDT (Southwest Research Institute)

Nov. 1984 See Also NASA CR-3427 (N81-25766/NSP)

LAR-13032**Vol. 8, No. 2, P. 238**

Technique combines theoretical and empirical aspects of structural components. Experimental and analytical program produces test and analysis procedures for predicting extent of noise generated in aircraft. Purpose of program to develop ways of screening candidate materials considered for noise control and establish test procedures for verifying choice of particular control measure.

B83-10617**COOLDOWN STRATEGY FOR CRYOGENIC WIND TUNNELS**

J. J. THIBODEAUX
Nov. 1984 See Also NASA TM-84527 (N82-10082/NSP)

LAR-13012**Vol. 8, No. 2, P. 238**

Criteria substantiated by experimental and real-time simulation data ensure optimal utilization of liquid nitrogen injected for cooling a 0.3-m transonic cryogenic tunnel (TCT). Research includes simulated cooldowns using procedures normally employed by each of several TCT operators, simulated cooldowns at constant mach number, simulated cooldowns at various constant fan speeds and cooldowns at constant metal-to-gas temperature differences.

B83-10618**INTERNALLY MOUNTING STRAIN GAGES**

J. R. JETT JR. (Northrop Services, Inc.)
Nov. 1984

GSC-12824**Vol. 8, No. 2, P. 239**

Technique for mounting strain gages inside bolt or cylinder simultaneously inserts gage, attached dowel segment, and length of expandable tubing. Expandable tubing holds gage in place while adhesive cures, assuring even distribution of pressure on gage and area gaged.

B83-10619**HEATER ENSURES STRAIN-GAGE BOND RELIABILITY**

J. K. BROWN (Rockwell International Corp.) and M. L. DAVENPORT (Rockwell International Corp.)

Nov. 1984

MFS 19859**Vol. 8, No. 2, P. 240**

Aluminum block with embedded heating element provides concentrated and controllable heat for curing strain-gage adhesives. Device replaces heat lamps and hot-air guns; provides higher temperatures, allows shorter curing times, and ensures more reliable bond. Low temperatures and wind do not significantly affect operation of heater, therefore suited to outdoor use.

B83-10620**MATHEMATICAL INSTABILITY CRITERIA FOR ELASTIC STRUCTURES**

M. ZAK (CALTECH)
Nov. 1984

06 MECHANICS

NPO-15090

Vol. 8, No. 2, P. 240

Theoretical paper discusses physical significance of vanishing of hyperbolic coefficients in equations of elastodynamics. Paper presents generalized approach to structural elastodynamics as part of continuing effort to develop mathematical stability criteria for structures and simulate postinstability behavior of elastics in general.

B83-10621

IMPROVEMENTS IN VIBRATION-ANALYSIS TECHNIQUE

R. C. ENGELS (Martin Marietta Corp.)

Nov. 1984

MFS-25919; MFS-25920

Vol. 8, No. 2, P. 241

Two reports present details of vibration-analysis technique. Technique scheme for accurate and efficient numerical integration of coupled equations of motion of vehicle and its payload(s). Applicable to large stationary structures, land vehicles, airplanes, ships, or wherever vibration analysis done repeatedly after each of many design changes.

B83-10622

ADVANCES IN MULTIVALUED-VELOCITY THEORY OF TURBULENCE

M. A. ZAK (CALTECH)

Nov. 1984

NPO-16006

Vol. 8, No. 2, P. 241

Developments reported in modeling of fluid turbulence as superposition of number of interpenetrating velocity fields. Multivalued-velocity model has practical implications in design of aircraft, turbines, nozzles, pumps, and other systems that involve turbulent flow. In both viscous and inviscid cases, equations made to predict stable regime of oscillations, both finite and independent of initial conditions as in case of real turbulence.

B83-10623

SYSTEM FOR STRUCTURAL SYNTHESIS COMBINES FINITE-ELEMENT ANALYSIS AND OPTIMIZATION PROGRAMS

J. L. ROGERS JR.

Nov. 1984

LAR-13046

Vol. 8, No. 2, P. 242

Programming System for Structural Synthesis, EAL/PROSSS, provides structural-synthesis capability by combining EAL and CONMIN computer programs with set of interface procedures. EAL is general-purpose finite-element structural-analysis program; CONMIN is general-purpose optimization program. User supplies two smaller problem-dependent programs to define design variables, constraints, and objective function.

B83-10624

MINIMIZING WEIGHT OF STRUCTURAL DESIGNS

L. A. SCHMIT JR. (University of California, Los Angeles)

and C. FLEURY (University of California, Los Angeles)

Nov. 1984

LAR-13107

Vol. 8, No. 2, P. 242

Approximation Concepts Code for Efficient Structural Synthesis (ACCESS3) combines methods to offer structural system designer powerful, efficient tool for synthesis of minimum-weight designs. Approximation concepts convert general structural synthesis problem into sequence of explicit problems of separable algebraic form; dual method exploits separable form to construct sequence of explicit dual functions.

B83-10625

FREE-VIBRATION ANALYSIS OF STRUCTURES

K. K. GUPTA (CALTECH)

Nov. 1984

NPO-15797

Vol. 8, No. 2, P. 243

Unified numerical procedure for free-vibration analysis of structures developed and incorporated into EIGSOL computer program. Dynamic response analysis of primary importance in design of wide range of practical structures such as space-craft, buildings, and rotating machineries.

Procedure determines natural frequencies and associated modes in structural design.

B83-10626

THERMAL RADIATION ANALYZER SYSTEM

J. SKLADANY

Nov. 1984

GSC-12783

Vol. 8, No. 2, P. 243

Thermal Radiation Analyzer System, TRASYS/II, is computer software system with generalized capability to solve radiation-related aspects of thermal-analysis problems. When used in conjunction with generalized thermalanalysis program, such as Systems Improved Numerical Differencing Analyzer (SINDA) program, any thermal problem expressed in terms of lumped-parameter RC thermal network solved.

B83-10627

MEASURING HIGH GAS TEMPERATURES

H. A. WILL

Nov. 1984

LEW-13819

Vol. 8, No. 2, P. 243

Program provides extrapolation calculations of high gas temperature based on theoretical heating curve of pulsed thermocouples. Program requires as input mach number, wall temperature, and total pressure in addition to thermocouple data. Tests indicate program extrapolates reasonably-accurate gas temperatures from pulsed-thermocouple data.

B83-10628

LAUNCH-WINDOW PROGRAM

J. A. ERICKSON (Computer Sciences Corp.)

Nov. 1984

GSC-12801

Vol. 8, No. 2, P. 244

Parameterized Investigation of Launch Opportunities and Trajectories (PILOT) program developed to perform mission simulation computations that yield data for use in delimiting optimum launch windows. CoPILOT utility program used to read and format PILOT-generated data file.

B83-10629

ANALYZING FLOW FIELDS IN AXIAL-COMPRESSOR ROTORS AND STATORS

W. J. THOMPSON JR. (Massachusetts Institute of Technology)

Nov. 1984

LEW-13910

Vol. 8, No. 2, P. 244

Computer program, BLADE3D, developed for analysis of inviscid three-dimensional flow fields in single blade passage of axial-compressor rotor or stator. Applicable to arbitrary axial-compressor hub, tip, and blade geometries, including blades with part-span dampers. Also used for axial turbines but with lowered resolution of flows about blunt leading and trailing edges. Analysis method valid for subsonic, transonic and supersonic flows, including choked flows.

B83-10630

GENERAL MANEUVER PROGRAM

J. A. ERICKSON (Computer Sciences Corp.)

Nov. 1984

GSC-12802

Vol. 8, No. 2, P. 244

General Maneuver Program, GMAN, computes both orbital and spin-axis reorientation maneuver parameters for various spacecraft. Specifically, GMAN computes detailed maneuver scenarios necessary to achieve desired orbit and attitude maneuvers. Program supports both spinning and inertially-fixed despun spacecraft and includes modeling for either hydrazine or Freon propulsion system.

B83-10631

THE MISSION RADIUS AND MANEUVERABILITY CHARACTERISTICS OF FIGHTER AIRCRAFT

W. E. FOSS JR.

Nov. 1984

LAR-12908

Vol. 8, No. 2, P. 245

Computer program provides detailed analysis of mission

radius and maneuverability characteristics of combat aircraft. Program combination of five mission modules representing mission profiles currently of interest. Each mission Module designed to determine combat radius or range capability for specific mission with associated ground rules and profile definitions.

B83-10632
ELLIPTICAL ORBIT PERFORMANCE COMPUTER PROGRAM

T. MYLER (Vought Corp.)

Nov. 1984

LAR-13026 Vol. 8, No. 2, P. 245

Elliptical Orbit Performance (ELOPE) computer program for analyzing orbital performance of space boosters uses orbit insertion data obtained from trajectory simulation to generate parametric data on apogee and perigee altitudes as function of payload data. Data used to generate presentation plots that display elliptical orbit performance capability of space booster.

B83-10633
TAKEOFF AND LANDING OF TRANSPORT AIRCRAFT

W. E. FOSS JR.

Nov. 1984

LAR-13086 Vol. 8, No. 2, P. 245

Computer program provides detailed analysis of takeoff and landing performance capabilities of transport-category aircraft. Performance calculated according to airworthiness standards of Federal Aviation Regulations. Program used to investigate advanced takeoff procedures for noise alleviation, such as programed throttle and control flaps.

B83-10634
ACCURACY CRITERION FOR STRUCTURAL CALCULATIONS

J. C. CHEN (CALTECH)

Nov. 1984

NPO-16008 Vol. 8, No. 2, P. 246

Simple method of establishing an accuracy criterion based on comparing allowable errors and modeling errors. On basis of comparison, amounts of change required to improve modeling error used in convergence criterion.

B83-10635
THERMAL AND FLOW DATA FROM LIQUID-OXYGEN SYSTEM

F. LIN, W. MOORE, and S. WALKER

Nov. 1984

KSC-11265 Vol. 8, No. 2, P. 246

Extensive flow rate, pressure, and temperature data available for validating computer models of liquid-oxygen transfer systems. Data on 'waterhammer' pressure spikes included.

B83-10636
LOW-SHOCK PYROTECHNIC ACTUATOR

M. H. LUCY

Nov. 1984

LAR-13198 Vol. 8, No. 2, P. 246

Miniature 1-ampere, 1-watt pyrotechnic actuator enclosed in flexible metal bellows. Bellows confines outgassing products, and pyrotechnic shock reduction achieved by action of bellows, gas cushion within device, and minimum use of pyrotechnic material. Actuator inexpensive, compact, and lightweight.

B83-10637
TEST FRAME SIMULATES ZERO GRAVITY

D. CHUNG (Lockheed Missiles & Space Co., Inc.) and D. LINDBERG (Lockheed Missiles & Space Co., Inc.)

Nov. 1984

MFS-25518 Vol. 8, No. 2, P. 247

Counterweighted frame simulates zero gravity in tests of solar-array wing. Net effect close simulation of zero-gravity environment in which wing must function. Frame also

facilitates testing and replacement of solar-cell elements and panels.

B83-10638
SIMULATING A THREE-DIMENSIONAL FLOW IN PIPES

A. LEONARD and A. A. WRAY

Nov. 1984

ARC-11466 Vol. 8, No. 2, P. 247

Numerical method simulates in unsteady, incompressible flow in axisymmetric pipe in three dimensions. Method relies on velocity-vector expansion technique in which each vector function in expansion set is divergence-free and satisfies boundary conditions for viscous flow.

B83-10639
MICROYIELD STRESS IN COMPOSITE MATERIALS

L. MCMAHAN (Boeing Aerospace Co.) and R. POND (Boeing Aerospace Co.)

Nov. 1984

MFS-25709 Vol. 8, No. 2, P. 247

New interferometric method for measuring microyield stress faster and more accurate than previous strain-gage method. Multiple laser beams reflected from corner-cube reflectors arranged in triangular patterns yielding data sufficient to separate length changes from rigid-body motion and bending.

B83-10640
INSPECTING JOINTS WITH GROOVED SURFACES

B. S. BURNS

Nov. 1984

MFS-25934 Vol. 8, No. 2, P. 247

Method of inspecting grooved joints covers full circumference of joint at its various depths. Inspection tools include guide block that holds fiberoptic scope with camera attached to its end and also holds light pipe with ultraviolet source attached to end.

B83-10641
ANALYZING VIBRATIONS IN A LONG MAST

B. SIMPSON (Lockheed Missiles & Space Co., Inc.)

Nov. 1984

MFS-25746 Vol. 8, No. 2, P. 247

Report describes mathematical prediction and measurement of vibrations in light weight extensible mast of lattice structure. With mast suspended from 10 vertical wires, vibrations excited in horizontal plane by motor-driven mechanism or by hand. Vibrations recorded photographically and with accelerometers.

B83-10642
TRACKING VISIBLE TARGETS AUTOMATICALLY

R. W. ARMSTRONG (CALTECH)

Nov. 1984

NPO-15226 Vol. 8, No. 2, P. 247

Report summarizes techniques for automatic pointing of scientific instruments by reference to visible targets. Applications foreseen in industrial robotics. Measurement done by image analysis based on gradient edge location, image-centroid location and/or outline matching.

B83-10643
SAFE EMERGENCY EVACUATION FROM TALL STRUCTURES

E. S. STEPHAN

Nov. 1984

KSC-11225 Vol. 8, No. 2, P. 248

Emergency egress system allows people to be evacuated quickly from tall structures. New emergency system applicable to rescues from fires in tall hotels and other buildings. System consists of basket on slide wire. Basket descends by gravity on sloped slide wire staked to ground.

B83-10644
MATHEMATICAL SIMULATION OF FLIGHT MANEUVERS

R. B. FRAUENHOLZ (CALTECH)

06 MECHANICS

Nov. 1984

NPO-15395

Vol. 8, No. 2, P. 248

Mathematical model simulates response of spin-stabilized spacecraft to commanded thruster pulses, using set of equations based on known inertial properties of vehicle and previously-determined thruster performance. Model used to generate sequence of thruster commands to accomplish specified maneuver.

B83-10645

TRACE-LEVEL SOLID-POLYMER ELECTROLYTE HYDROMETER

E. G. LAUE (CALTECH), J. B. STEPHENS (CALTECH), and M. M. L. YANG (CALTECH)

Nov. 1984

NPO-15722

Vol. 8, No. 2, P. 248

Water vapor absorbed by solid polymer electrolyte detected by measuring current required to electrolyze water.

B83-10646

SUBMICRON-PARTICLE GENERATOR

E. MORRISETTE and D. BUSHNELL

Nov. 1984

LAR-12785

Vol. 8, No. 2, P. 248

Particle generator supplies submicron-size particles to high-pressure airstream. Particles serve as light scatterers in laser velocimeter for ultra-high-speed gas. Advantage of generator: produces cloud of uniform, submicron particles at high ambient pressures and high flow rates.

B83-10647

PARTIAL-PAYLOAD SUPPORT STRUCTURE

R. MITCHELL (Brown Engineering) and M. FREEMAN (Brown Engineering)

Nov. 1984

MFS-25485

Vol. 8, No. 2, P. 249

Partial-payload support structure (PPSS) is modular, bridge like structure supporting experiments weighing up to 2 tons. PPSS handles such experiments more economically than standard Spacelab pallet system.

B83-10648

FATIGUE TESTING OF HEAT-EXCHANGER TUBES

P. ACKERMAN (Rockwell International Corp.)

Nov. 1984

MFS-19599

Vol. 8, No. 2, P. 249

Accelerated fatigue-life testing of heat-exchanger tubes simplified by technique that substitutes mechanical side load for thermally-generated axisymmetric stress. Load amplitudes adjusted to produce strains equivalent to those produced by anticipated thermal stress.

B83-10649

PORTABLE FATIGUE-TESTING MACHINE

J. LEWIS (Rockwell International Corp.) and C. DAUGHERTY (Rockwell International Corp.)

Nov. 1984

MFS-19459

Vol. 8, No. 2, P. 249

Portable machine constructed for fatigue testing of structural materials or machinery parts subjected to fatigue loads. Piezoelectric crystal stack adds oscillatory force to constant force. Machine tests wider variety of objects than with usual rotating-beam fatigue tests.

B83-10650

BRUSHLESS LOW-SPEED DC TACHOMETER

M. B. HANDLYKKEN (CALTECH)

Nov. 1984

NPO-15706

Vol. 8, No. 2, P. 249

Proposed tachometer produces voltages proportional to shaft angular velocity and (by differentiation) acceleration. Coil moving in homopolar field generates emf proportional to shaft angular velocity.

B83-10651

OPTICAL TURBOPUMP SPEED SENSOR

D. SWAIN (Rockwell International Corp.)

Nov. 1984

MFS-19794

Vol. 8, No. 2, P. 249

Optical tachometer measures shaft rotation from outside turbopump housing. Laser-diode beam passes through quartz lens into shaft nut with alternating reflective and nonreflective surfaces. Reflected pulses collected by lens and transmitted to photodetector.

B83-10652

THEORY FOR ECCENTRIC AND MISALIGNED ANNULAR SEALS

E. JACKSON (Rockwell International Corp.) and W. CHEN (Rockwell International Corp.)

Nov. 1984

MFS-19892

Vol. 8, No. 2, P. 249

Theory describes behavior of eccentric and angularly-misaligned incompressible-fluid shaft seals. Direct and cross-coupled stiffness and damping coefficients expressed in terms of degree of eccentricity and coefficients of concentric system.

B83-10653

BELLEVILLE SPRING/SEAL

D. P. BRADLEY (Rockwell International Corp.)

Nov. 1984

MFS-19596

Vol. 8, No. 2, P. 250

Metallic seal for cavity openings in liquid-nitrogen environments uses Belleville-spring preloaded washer. Due to preloading, Belleville spring/ seal washers slide and deflect to accept radial and axial movement between two sealing surfaces while remaining in sealing contact.

B83-10654

LEAK TEST FOR PRESSURE-SEALING ZIPPERS

E. ERICKSON (Kelly Services)

Nov. 1984

KSC-11247

Vol. 8, No. 2, P. 250

Test jig checks either side of pressure-sealing zippers for leaks. Procedure takes little time, and seal failure determined before zipper incorporated into suit.

B83-10655

BARRIER SEAL FOR HYDRAULIC ACTUATORS

R. E. PROUT (Rockwell International Corp.) and F. MILLER (Moog, Inc.)

Nov. 1984

MSC-20390

Vol. 8, No. 2, P. 250

Barrier seal slows loss of pressurized hydraulic fluid due to leakage in primary seal. Barrier seal, placed downstream of primary O-ring seal, serves as secondary obstacle to leakage.

B83-10656

SUPERSONIC-NOZZLE SHOCK-WAVE ANALYSIS

W. R. WAGNER (Rockwell International Corp.) and G. H. RATEKIN (Rockwell International Corp.)

Nov. 1984

MFS-19753

Vol. 8, No. 2, P. 250

Analytical procedure used to modify design of high-pressure-ratio nozzles to reduce vibration during start-up and shutdown. Nozzles used in jet engines, laser nozzles and diffusers, wind tunnels, gas turbines and rocket engines.

B83-10657

NONSEPARATING HIGH-AREA-RATIO SUPERSONIC NOZZLES

W. R. WAGNER (Rockwell International Corp.) and R. R. KASSNER (Rockwell International Corp.)

Nov. 1984

MFS-19758

Vol. 8, No. 2, P. 250

Procedure determines supersonic-nozzle contours that allow higher nozzle-exit wall pressures, reducing chamber pressure without causing wall-flow separation as encountered in optimum large-area-ratio nozzle designs. Pro-

cedure applies to chemical-laser nozzles, jet-engine and gas turbines, wind tunnels and rocket nozzles.

07 MACHINERY

B83-10083 REMOTE MANIPULATOR HAS RELISTIC 'FEEL'

A. K. BEJCZY (CALTECH)

Aug. 1983

NPO-15065

Vol. 7, No. 3, P. 321

Computer aided remote manipulator does not transmit weight and inertia of its own joints and segments. Achieves load sensitivity by processing signals that move manipulator separately from those that apply reflective forces and torques on hand controller. Operator feels only load.

B83-10084 PRESSURE REDUCER FOR COAL GASIFIERS

S. KENDALL, JAMESM. (CALTECH)

Aug. 1983

NPO-15100

Vol. 7, No. 3, P. 322

Quasi-porous-plug pressure reducer is designed for gases containing abrasive particles. Gas used to generate high pressure steam to drive electric power generators. In giving up heat to steam, gas drops in temperature. Device used for coal gasification plants.

B83-10085 PASSIVE MAGNETIC BEARING

P. A. STUDER

Aug. 1983

GSC-12726

Vol. 7, No. 3, P. 323

Magnetic bearing for limited rotation devices requires no feedback control system to sense and correct shaft position. Passive Magnetic Torsion Bearing requires no power supply and has no rubbing parts. Torsion wire restrains against axial instability. Magnetic flux geometry chosen to assure lateral stability with radial restoring force that maintains alignment.

B83-10086 WIND TURBINE WITH CONCENTRIC DUCTS

A. J. MUHONEN (Boeing Services International)

Aug. 1983

KSC-11191

Vol. 7, No. 3, P. 324

Wind Turbine device is relatively compact and efficient. Converging inner and outer ducts increase pressure difference across blades of wind turbine. Turbine shaft drives alternator housed inside exit cone. Suitable for installation on such existing structures as water towers, barns, houses, and commercial buildings.

B83-10087 ELECTROCHEMICAL DEBURRING

R. K. BURLEY (Rockwell International Corp.)

Aug. 1983

MFS-19693

Vol. 7, No. 3, P. 324

Electrochemical deburring removes burrs from assembled injector tubes. Since process uses liquid anodic dissolution in liquid electrolyte to provide deburring action, smoothes surfaces and edges in otherwise inaccessible areas. Tool consists of sleeve that contains metallic ring cathode. Sleeve is placed over tube, and electrolytic solution is forced to flow between tube and sleeve. The workpiece serves an anode.

B83-10088 COIL WELDING AID

W. T. WIESENBAACH (Rockwell International Corp.) and M. C. CLARK (Rockwell International Corp.)

Aug. 1983

MSC-20470

Vol. 7, No. 3, P. 325

Positioner holds coil inside cylinder during tack welding. Welding aid spaces turns of coil inside cylinder and applies contact pressure while coil is tack-welded to cylinder. Device facilitates fabrication of heat exchangers and other structures by eliminating hand-positioning and clamping of individual coil turns.

B83-10089 GAGE MEASURES RECESSED GAPS

J. L. ZEPEDA (Rockwell International Corp.)

Aug. 1983

MSC-20230

Vol. 7, No. 3, P. 326

New tool measures separation between recessed parallel surfaces. Tiles have overhanging edges, tool designed to slip into gap from end so it extends through 0.040-inch crack. Measure gaps between 0.200 and 0.400 inch so gap fillers of proper thickness can be selected. Useful in numerous industrial situation involving gap measurements in inaccessible places.

B83-10090 TOOLING CONVERTS STOCK BEARINGS TO CUSTOM BEARINGS

E. N. FLEENOR JR.

Aug. 1983

LAR-12922

Vol. 7, No. 3, P. 327

Technique for reworking stock bearings saves time and produces helicopter-rotor bearings ground more precisely. Split tapered ring at one end of threaded bolt expands to hold inside of inner race bearing assembly; nut, at other end of bolt, adjusts amount of spring tension. Piece of hardware grasps bearing firmly without interfering with grinding operation. Operation produces bearing of higher quality than commercially available bearings.

B83-10091 DRILLING PRECISE ORIFICES AND SLOTS

C. W. RICHARDS (Marquardt Co.) and J. E. SEIDLER (Marquardt Co.)

Aug. 1983

MSC-20053

Vol. 7, No. 3, P. 328

Reaction control thruster injector requires precisely machined orifices and slots. Tooling setup consists of rotary table, numerical control system and torque sensitive drill press. Components used to drill oxidizer orifices. Electric discharge machine drills fuel-feed orifices. Device automates production of identical parts so several are completed in less time than previously.

B83-10092 ROBOTIC WATER BLAST CLEANER

M. H. SHARPE, M. L. ROBERTS, W. E. HILL, and C. H. JACKSON

Aug. 1983

MFS-25519

Vol. 7, No. 3, P. 329

Water blasting system under development removes hard, dense, extraneous material from surfaces. High pressure pump forces water at supersonic speed through nozzle manipulated by robot. Impact of water blasts away unwanted material from workpiece rotated on air bearing turntable. Designed for removing thermal-protection material, system is adaptable to such industrial processes as cleaning iron or steel castings.

B83-10093 STAKED BEARING REMOVAL TOOL

L. A. BERSON (Rockwell International) and R. G. BIRD (Rockwell International)

Aug. 1983

MSC-20337

Vol. 7, No. 3, P. 330

Tool with assembled components expedites bearing replacement in aircraft, ground vehicles, and other applica-

07 MACHINERY

tions. New tool cuts lip on one side to facilitate bearing replacement. After bearing retaining lip is cut away, bearing pressed out. Tool makes it possible to replace bearings without disassembling structure.

B83-10094
SELF-ALINING QUICK-CONNECT JOINT
M. H. (LUCY)
Aug. 1938
LAR-12711

Vol. 7, No. 3, P. 331

Quick connect tapered joint used with minimum manipulation and force. Split ring retainer holds locking ring in place. Minimal force required to position male in female joint, at which time split-ring retainers are triggered to release split locking rings. Originally developed to assemble large space structures, joint is simple, compact, strong, lightweight, self aligning, and has no loose parts.

B83-10095
SELF-LOCKING CONNECTOR
K. GASPAR (Rockwell International Corp.)
Aug. 1983
MFS-19716

Vol. 7, No. 3, P. 332

Connector lock resists vibration, automatically compensates for wear, and exhibits no backlash when parts are seated. Mechanism built into coupling nut on outer connector body. Outer collar turned clockwise to tighten treaded coupling nut, transmitting torque to coupling nut through six radially oriented pins.

B83-10096
LATCHING MECHANISM FOR UMBILICAL CONNECTORS
G. C. BURNS (McDonnell Douglas Corp.)
Aug. 1983
MSC-20242

Vol. 7, No. 3, P. 333

Electromechanical interface transfers electric power, data and coolant from one system to another. Motor-actuated jackscrew moves connector on active half of interface to mating connector on passive half. Originally suggested for spacecraft, concept adaptable to underwater connections.

B83-10097
REUSABLE HIGH-PRESSURE CONNECTOR
H. O. C. JENSEN (Rockwell International Corp.), H. M. MALTBY (Rockwell International Corp.), and J. A. STEIN (Rockwell International Corp.)
Aug. 1983
MSC-20339

Vol. 7, No. 3, P. 334

Fluid line connector for high pressure tests has split ferrule, nut, and O-ring seal. Following test, ferrule nut, and O-ring fitting are removed leaving line unaltered except for bushing braze to free end. Connector assures strong joint for high-pressure testing without redundant parts requiring posttest debrazing.

B83-10098
RETAINING-RING INSTALLATION TOOL
S. CHRISTIAN (Rockwell International)
Aug. 1983
MFS-19725

Vol. 7, No. 3, P. 334

New tool eliminates damage to ring through improper tool use. Tool installs spiral-wound retaining rings quickly, reliably, and safely. Tool inserts rings in splined or irregularly shaped bores, bores at bottom of deep ring and slides it along bore until it nests in groove. Pistons are moved by variety of linkages.

B83-10099
MACHINING THREE PRONGS ON A SHAFT
C. HEWITT (Rockwell International)
Aug. 1983
MFS-19729

Vol. 7, No. 3, P. 335

Simple tool reduces set-up and machining time by more than 70 percent. Unorthodox tooling arrangement used to machine three prongs on end of specialpurpose wrench.

Modified carbide-tipped spot-facing tool rotated at 1,400 to 1,600 revolutions per minute in small milling machine and applied to work piece, held with its corners in spaces of three-cornered collect.

B83-10100
SELF-CLEANING TUBULAR-MEMBRANE MODULE
M. N. SARBOLOUKI (CALTECH)
Aug. 1983
NPO-15245

Vol. 7, No. 3, P. 335

Tubular membranes made self-cleaning with aid of flow reversing valve. Sponge balls scrub membrane surfaces as they travel inside membrane tubes. A four-way flow-reversal valve automatically reverses flow in tubes at preset intervals so sponge balls reciprocate along tubes. Baskets at ends of tubes prevent sponges from escaping. Automatic cleaning feature added to existing membrane processing equipment with minimal modifications.

B83-10101
AIR-LUBRICATED LEAD SCREW
G. S. PERKINS (CALTECH)
Aug. 1983
NPO-15617

Vol. 7, No. 3, P. 336

Air lubricated lead screw and nut carefully machined to have closely matched closely fitting threads. Compressed air injected into two plenums encircle nut and flow through orifices to lubricate mating threads. Originally developed to position precisely interferometer retroreflector for airborne measurement of solar infrared radiation, device now has positioning accuracy of 0.25 micron.

B83-10102
FLOW THROUGH A ROTATING TURBOMACHINERY BLADE ROW
C. A. FARRELL JR.
Aug. 1983
LEW-13832

Vol. 7, No. 3, P. 337

Computer program, QSONIC, developed for calculating full potential transonic quasi-three dimensional flow through rotating turbomachinery blade row. QSONIC written in FORTRAN IV.

B83-10103
COMPRESSIBLE FLOW ABOUT WIND TURBINE BLADES
D. S. DULIKRAVICH
Aug. 1983
LEW-13740

Vol. 7, No. 3, P. 337

WIND program numerically solves exact full-potential equation for three dimensional, steady inviscid flow through isolated wind-turbine rotor. Program automatically generates three dimensional, boundary-conforming grid and iteratively solves full-potential equation while fully accounting for rotating and Coriolis effects. Program written in FORTRAN IV.

B83-10104
CALCULATING THE FLOW FIELD IN A RADIAL TURBINE SCROLL
E. BASKHARONE (University of Cincinnati), S. ABDALLAH (University of Cincinnati), A. HAMED (University of Cincinnati), and W. TABAOFF (University of Cincinnati)
Aug. 1983
LEW-13437

Vol. 7, No. 3, P. 338

Set of two computer programs calculates flow field in radial turbine scroll. Programs represent improvement in analyzing flow in radial turbine scrolls and provide designer with tools for designing better scrolls. Programs written in FORTRAN IV.

B83-10197
COAXIAL REDUNDANT DRIVES
R. BRISSETTE (American Science & Engineering, Inc.)
Oct. 1983
MFS-25171

Vol. 7, No. 4, P. 441

Harmonic drives allow redundancy and high out put

torque in small package. If main drive fails, standby drive takes over and produces torque along same axis as main drive. Uses include power units in robot for internal pipeline inspection, manipulators in deep submersible probes or other applications in which redundancy protects against costly failures.

B83-10198
CRYOGENIC VACUUM PUMP
C. A. ZACHMAN (CALTECH)
Oct. 1983

NPO-15517 Vol. 7, No. 4, P. 442
System provides high pumping capacity even for noble gases. First stage, removes water and CO₂ from input gas. Second stage, removes noble gases except helium and some lighter gases not trapped by first stage. Third stage, traps all remaining gases. All three stages mounted inside liquid-nitrogen Dewar that cools first stage. Pump small enough for general laboratory use.

B83-10199
JET ENGINES AS HIGH-CAPACITY VACUUM PUMPS
C. J. WOJCIECHOWSKI (Lockheed Missiles & Space Co., Inc.)
Oct. 1983
MFS-25791 Vol. 7, No. 4, P. 443

Large diffuser operations envelope and long run times possible. Jet engine driven ejector/diffuser system combines two turbojet engines and variable-area-ratio ejector in two stages. Applications in such industrial processes as handling corrosive fumes, evaporation of milk and fruit juices, petroleum distillation, and dehydration of blood plasma and penicillin.

B83-10200
SPOOL-VALVE PRESSURE-DIFFERENCE REGULATOR
A. P. GRASSO (United Technologies Corp.)
Oct. 1983
MSC-20127 Vol. 7, No. 4, P. 443

Valves maintain preset pressure difference between gas flows. Two spool valves connected by shaft move back and forth in response to changes in pressure in oxygen and hydrogen chambers. Spool-valve assembly acts to restore pressures to preset difference. By eliminating diaphragms, pressure exerted directly on external end of spool valve; however, forces and therefore sensitivity of assembly are reduced.

B83-10201
RETRACTABLE ROTATING DOOR LATCH
R. B. CARSLEY (Rockwell International Corp.)
Oct. 1983
MSC-20304 Vol. 7, No. 4, P. 444

New mechanism turns door latch, latching or unlatching door, then retracts until latch is flush with surface of door frame. Concentric cylinders have cam grooves machined in surfaces. When rotated relative to each other cylinders impart rotation and translation to shaft of door latch. Motions may proceed separately or simultaneously.

B83-10202
LOCKING BOLT
B. E. BOSWELL (McDonnell Douglas Corp.)
Oct. 1983
MSC-20439 Vol. 7, No. 4, P. 445

Locking ball in bolt head holds wrench in place. Head of bolt contains locking ball and releases pin to grasp box wrench or other tool. Installed in cramped spaces that prevent operator from using both hands or maneuverability restricted by bulky clothing or obstacles.

B83-10203
EXPANDER FOR THIN-WALL TUBING
R. PESSIN (Rockwell International Corp.)
Oct. 1983
MFS-19739 Vol. 7, No. 4, P. 445

Tool locally expands small-diameter tubes. Tube expander locally expands and deforms tube: Compressive lateral stress induced in elastomeric sleeve by squeezing axially between two metal tool parts. Adaptable to situations in which tube must have small bulge for mechanical support or flow control.

B83-10204
TRANSPORTER FOR TREATED SHEET MATERIALS
M. POLLACK, H. (Fairchild Republic Co.)
Oct. 1983

MSC-20332 Vol. 7, No. 4, P. 446
Plastic spacers keep parts separated during transport or storage. Cart with rods and spacers holds sheets with delicate finishes for storage or transport. Sheets supported vertically by rods, or horizontally. Spacers keep sheets separated. Designed to eliminate time and expense of taping, wrapping, and sometimes refinishing aluminum sheets with delicate anodized finish.

B83-10205
TOOL FOR GUIDING AN AUGER
C. J. WESSELSKI
Oct. 1983
MSC-20194 Vol. 7, No. 4, P. 447

Auger and Ram have same pitch, which minimizes damage to workpiece and load carried by auger. Auger firmly fastened onto ram shaft by screw and kept from rotating on shaft by slot machined into end of stem and male driving lug that engages slot. Used to install threaded studs in plastic or rubber where impractical to mold them in.

B83-10206
BENDER/COILER FOR TUBING
J. M. STOLTZFUS (Lockheed Corp.)
Oct. 1983
MSC-20410 Vol. 7, No. 4, P. 448

Easy-to-use tool makes coils of tubing. Tubing to be bend clamped with stop post. Die positioned snugly against tubing. Operator turns handle to slide die along tubing, pushing tubing into spiral groove on mandrel.

B83-10207
PLASTIC CLAMP RETAINS CLEVIS PIN
R. G. CORTES (Rockwell International Corp.)
Oct. 1983
MFS-19747 Vol. 7, No. 4, P. 448

Plastic clamp requires no special installation or removal tools. Clamp slips easily over end of pin. Once engaged in groove, holds pin securely. Installed and removed easily without special tools - screwdriver or putty knife adequate for prying out of groove. Used to retain bearings, rollers pulleys, other parts that rotate. Applications include slowly and intermittently rotating parts in appliances.

B83-10208
PORTABLE ROLLER STAKING TOOL
R. G. BIRD (Rockwell International Corp.) and L. A. BERSON
Oct. 1983
MSC-20281 Vol. 7, No. 4, P. 449

Staking tool compact and portable. Tool combines clamping and staking operations in single unit. Tool clamps workpiece (a bearing or bushing), aligns it, and stakes on of flat faces. Used for most roller staking operations which access both faces of workpiece.

B83-10209
TOOL FOR REPLACING BUSHINGS
R. G. BIRD (Rockwell International Corp.)
Oct. 1983
MSC-20282 Vol. 7, No. 4, P. 450

Centerlines of original bushings maintained. Tool frame extends around structure that holds bushings to be removed. Floating bushings of tool positioned with jig pin that slides

07 MACHINERY

snugly in old bushing and floating tool bushings. Floating bushings then clamped to tool frame.

B83-10210

TESTING BEARINGS IN TIGHT SPACES

R. G. BIRD (Rockwell International Corp.) and L. A. BERSON
Oct. 1983

MSC-20250

Vol. 7, No. 4, P. 451

Portable tool checks bushings and bearings in hard-to-reach places to ensure they are properly staked. Actuator plate with surfaces at 45 degrees to hydraulic cylinder shaft turns push or pull perpendicular to original direction. Tool makes unnecessary to disassemble equipment to gain access to parts.

B83-10211

HOLDING TUBES IN PLACE FOR BRAZING

D. AMBRISCO (Rockwell International) and P. ARBINO
(Rockwell International)

Oct. 1983

MFS-19658

Vol. 7, No. 4, P. 452

Simple method prevents loosening due to thermal mismatch. Four segment die pushed outward against tubing wall by tapered ram. Boss on each segment of die produces dimple in wall. Ram driven by commercial pneumatic cylinder powered by air at 250 psi. Method applicable to brazing of heat exchangers, thrust chambers, and other assemblies in which thermal expansion coefficients of materials differ significantly.

B83-10212

HOLDER FOR FRAGILE PARTS

L. R. HOLLAND (Athens State College)

Oct. 1983

MFS-25772

Vol. 7, No. 4, P. 453

Fixture with many springfingers holds irregularly-shaped parts. Gripping fixture has hundreds of springfingers, each applies minute force. Total force approximates hydrostatic pressure, resulting in well-distributed load that maintains firm grip without high stress concentrations. Applied to industrial robot manipulators, fixture enhances ability to grasp delicate parts.

B83-10213

THERMAL ELASTOHYDRODYNAMIC LUBRICATION OF SPUR GEARS

K. L. WANG (Northwestern University) and H. CHENG
(Northwestern University)

Oct. 1983

LEW-13528

Vol. 7, No. 4, P. 454

Analysis and computer program (TELSGE) predict variations of dynamic load and surface temperature and lubricant film thickness along contacting path of pair of involute spur gears. Analysis of dynamic load includes effect of gear inertia, effect of load sharing of adjacent teeth, and effect of variable tooth stiffness obtained by element method. TELSGE written in FORTRAN IV.

B83-10407

LATCH FOR STORED CARGO

K. H. CLARK

Apr. 1984

MFS-25837

Vol. 8, No. 1, P. 97

Spherical latch elements distribute load over broad area. Concave and convex latching surfaces couple with one another to secure payload. Motor-drive pin locks latch in place; for active latch, second motor turns connecting plate attached to concave latch element. Spherical shape of latching elements distributes cargo weight over broad surface so no 'hotspots' when cargo secured.

B83-10408

VARIABLE-CONDUCTANCE HEAT-TRANSFER MODULE

D. R. HEWITT

Apr. 1984

GSC-12771

Vol. 8, No. 1, P. 98

Working lengths of heat pipes electronically controlled. Rate of heat transfer controlled by electrical heaters shorten effective working lengths of heat pipes. Concept not limited to right circular cylindrical shape. Concept adaptable to terrestrial instruments or processes in which atmospheres or fluids must be cooled and returned to instruments or processes at fixed lower temperatures.

B83-10409

THREE-FINGERED ROBOT HAND

C. F. RUOFF (CALTECH) and J. K. SALISBURY (CALTECH)
Apr. 1984

NPO-15959

Vol. 8, No. 1, P. 99

Mechanical joints and tendons resemble human hand. Robot hand has three 'human-like' fingers. 'Thumb' at top. Rounded tips of fingers covered with resilient material provides high friction for gripping. Hand potential as prosthesis for humans.

B83-10410

EQUATIONS FOR AUTOMOTIVE-TRANSMISSION PERFORMANCE

S. CHAZANOFF (CALTECH), M. B. ASTON (CALTECH),
and C. P. CHAPMAN (CALTECH)

Apr. 1984

NPO-15825

Vol. 8, No. 1, P. 100

Curve-fitting procedure ensures high confidence levels. Three-dimensional plot represents performance of small automatic transmission coasting in second gear. In equation for plot, PL power loss, S speed and T torque. Equations applicable to manual and automatic transmissions over wide range of speed, torque, and efficiency.

B83-10411

PORTABLE X-Y SCANNER

G. W. KURTZ and B. F. BANKSTON

Apr. 1984

MFS-25687

Vol. 8, No. 1, P. 100

Lightweight device uses one drive motor for surface scanning. Electromechanical X-Y Scanner indexed in both x and y by single motor. Constructed of readily available inexpensive parts. Used to move eddycurrent sensor over surface of metal plate; other applications for unique features include low power consumption, light weight, and portability.

B83-10412

HOLE-CENTER LOCATING TOOL

H. F. SENTER (Boeing Services International)

Apr. 1984

KSC-11248

Vol. 8, No. 1, P. 101

Tool aligns center of new hold with existing hole. Tool marks center of new hole drilled while workpiece is in place. Secured with bolts while hole center marked with punch. Used for field installations where reference points unavailable or work area cramped and not easily accessible with conventional tools.

B83-10413

TOOL ENLARGES HARD-TO-REACH HOLES

J. P. GEDDES (Rockwell International Corp.)

Apr. 1984

MFS-19789

Vol. 8, No. 1, P. 102

Tool centers itself and cuts precise depth. Tool consists of crosscut carbide bur; sleeve that serves as depth stop and pilot; length of flexible, strong piano wire; and standard drive socket. Parts brazed together. Piano wire transmits torque and axial force to cutting tool.

B83-10414

ESTIMATING PUMP BLOCKAGE

W. CHUNG (Rockwell International Corp.), S. Y. MENG
(Rockwell International Corp.), and C. Y. MENG (Rockwell
International Corp.)

Apr. 1984

MFS-19783

Vol. 8, No. 1, P. 102

Blockage predicted for all components including induc-

ers, impellers and diffusers. Pump performance predicted by semiempirical method shows excellent agreement with test results in Space Shuttle main-engine highpressure fuel turbopump. Comparisons of pump efficiency show equally good agreement of calculated values with experimental ones. Method improves current estimation methods based solely on subjective engineering judgment.

B83-10415**WIRE RETRIEVES BROKEN PIN**

G. H. BUROW (Rockwell International Corp.)

Apr. 1984

MFS-19768

Vol. 8, No. 1, P. 103

Safety wire retains pieces of broken tool. Retrieval wire running through shaft of tool used to pull pieces of tool out of hole, should tool break during use. Safety wire concept suitable for pins subject to deflection or breakage.

B83-10416**CONTROL-CHAIN SAFETY TRAY AND FRICTION PULL**

G. HAJDIK and C. R. PEEK (Pan American World Airways, Inc.)

Apr. 1984

MSC-20401

Vol. 8, No. 1, P. 104

Tray mounted above suspended ceiling keeps sprinkler-system control chain safely out of way of pedestrian traffic below. Tray reached easily by using fireman's hook short stepladder, or chair or by jumping up to grasp chain. Safety tray used for infrequently used control chains on vents and dampers.

B83-10417**AUTOMATED COAL-MINE SHUTTLE CAR**

E. R. COLLINS JR. (Caltech)

Apr. 1984

NPO-15850

Vol. 8, No. 1, P. 105

Cable-guided car increases efficiency in underground coal mines. Unmanned vehicle contains storage batteries in side panels for driving traction motors located in wheels. Batteries recharged during inactive periods or slid out as unit and replaced by fresh battery bank. Onboard generator charges batteries as car operates.

B83-10418**SHUTTLE-CAR SYSTEM FOR CONTINUOUS MINING**

E. R. COLLINS JR. (Caltech)

Apr. 1984

NPO-15949

Vol. 8, No. 1, P. 106

Buffer storage catches coal production between loadings. Telescoping reservoir filled continuously. With tailgate down, shuttle car slides into place along sides and bottom of reservoir. Reservoir retracts along inside of car and out through tailgate, leaving coal behind in car. System not restricted to coal mining and may prove economical for hauling other solid materials.

B83-10419**MECHANICAL COAL-FACE FRACTURER**

E. R. COLLINS JR. (Caltech)

Apr. 1984

NPO-15847

Vol. 8, No. 1, P. 107

Radial points on proposed drill bit take advantage of natural fracture planes of coal. Radial fracture points retracted during drilling and impacted by piston to fracture coal once drilling halts. Group of bits attached to array of pneumatic drivers to fracture large areas of coal face.

B83-10420**SHOCK MOUNTING FOR HEAVY MACHINES**

A. R. THOMPSON (Thiokol Corp.)

Apr. 1984

MFS-25888

Vol. 8, No. 1, P. 107

Elastomeric bearings eliminate extraneous forces. Rocket thrust transmitted from motor to load cells via support that absorbs extraneous forces so they do not affect accuracy of thrust measurements. Adapter spoked cone

fits over forward end of rocket motor. Shock mounting developed for rocket engines under test used as support for heavy machines, bridges, or towers.

B83-10421**RECIPROCATING LINEAR ELECTRIC MOTOR**

M. P. GOLDOWSKY (U.S. Phillips Corp.)

Apr. 1984

GSC-12773

Vol. 8, No. 1, P. 108

Features include structural simplicity and good force/displacement characteristics. Reciprocating motor has simple, rugged construction, relatively low reciprocating weight, improved power delivery, and improved force control. Wear reduced by use of magnetic bearings. Intended to provide drivers for long-lived Stirling-cycle cryogenic refrigerators, concept has less exotic applications, such as fuel pumps.

B83-10422**SEGMENTED TUBULAR SEAT SPRINGS**

L. A. HASLIM

Apr. 1984

ARC-11349

Vol. 8, No. 1, P. 110

Low-cost seat cushion made with rows of hoop springs. Springs formed from elliptical tubes by cutting most of way through on planes perpendicular to cylindrical axis. Tubular spring simplifies construction and reduce cost of seat cushions in vehicles and furniture.

B83-10423**AIR GUIDE FOR SHEET-METAL GRINDER**

T. HEERMANN (Rockwell International Corp.)

Apr. 1984

MFS-19788

Vol. 8, No. 1, P. 111

Tool attachment reduces heat distortion of sheet. Air-guide attachment directs air from grinder motor to grinding wheel and metal sheet being ground. Cooling air reduces thermal distortion of workpiece due to localized frictional heating. Particularly useful when grinding sheet metal.

B83-10424**METERING BAFFLE FOR TURBINE-BLADE COOLING**

R. MOORE (Pratt & Whitney Aircraft Group), D. E. PAULUS (Pratt & Whitney Aircraft Group), and T. S. RACKLEY (Pratt & Whitney Aircraft Group)

Apr. 1984

MFS-25849

Vol. 8, No. 1, P. 112

Mixing losses due to excessive film cooling reduced. Turbine blade or vane cooled by gas or liquid flowing through holes to exterior airfoil surface. Metering baffle inside airfoil controls flow to each row of cooling holes. Resulting surface-film flow keeps airfoil cool enough to operate in high-heat, high pressure turbines.

B83-10425**CONVECTION-COOLED TURBINE AIRFOILS**

D. E. PAULUS (Pratt & Whitney Aircraft Group)

Apr. 1984

MFS-25848

Vol. 8, No. 1, P. 112

Coolant channels close to surface ensure efficient heat transfer. Advanced convection-cooled airfoil consists essentially of metal cover on grooved support structure. Grooves form coolant passages oriented in any direction. After cover material is applied, filler material removed from coolant passages form conduit for heat transfer fluid.

B83-10426**ANTIVORTEX INLET RIBS FOR FLUID-SEALS**

W. C. CHEN (Rockwell International Corp.), R. F. BEATTY (Rockwell International Corp.), and E. D. JACKSON (Rockwell International Corp.)

Apr. 1984

MFS-19793

Vol. 8, No. 1, P. 113

Instability in rotating machinery reduced. Ring of ribs fastened to existing stator in turbopump pressure-seal inlet.

07 MACHINERY

Ribs suppress swirl in flow entering seal. Rib concept offers relatively inexpensive solution to some lateral-instability problems in many other systems with rotating pressure seals.

B83-10427

BALL-AND-SOCKET-BEARING WEAR TEST

W. G. GRAHAM (Rockwell International Corp.)

Apr. 1984

MFS-19737

Vol. 8, No. 1, P. 114

Series of experiments to measure wear life of spherical bearing summarized. Report designed to establish clearance, contour, finish, and lubricant parameters for highly-loaded, compact plain spherical bearing. Information useful in design of bearings for helicopter control linkages, business machines, nuclear reactor, and rotor bearings.

B83-10428

BEARING WEAR IN LARGE THERMAL GRADIENTS

J. W. KANNEL (Battelle Columbus Laboratories)

Apr. 1984

MFS-25879

Vol. 8, No. 1, P. 115

Report presents results of study of bearing distress resulting from malfunction of spring-preloading arrangements. Study examined effect of thermal growth on wear depth of bearing. Report considers bearing-failure modes, relationships between growth and wear, maximum stresses as function of load, and effect of thermal growth on spring-load deflections.

B83-10429

CLAMP FOR ATTACHING EQUIPMENT TO AN I-BEAM

K. H. CLARK

Apr. 1984

MFS-25510

Vol. 8, No. 1, P. 115

Quick-connect/disconnect clamp attaches instruments or equipment to I-beam, or similar flanged structures, without use of tools or much force.

B83-10430

CONTINUOUS MINING MACHINE

T. KNUROVSKY (Caltech) and J. KISKIS (Caltech)

Apr. 1984

NPO-15164

Vol. 8, No. 1, P. 115

Mining machine contains two maneuverable drums for cutting coal and rock intrusion in coal seam.

B83-10431

ROOF SUPPORT NEAR COAL-MINING FACE

T. KNUROVSKY (Caltech), J. P. KISKIS (Caltech), and G. SIEGEL (Caltech)

Apr. 1984

NPO1-15165

Vol. 8, No. 1, P. 115

Hydraulically-powered legs mounted on crawlers and carrying sections of conveyors provide roof support close to working face and above workspace at all times.

B83-10432

BIDIRECTIONAL CONTINUOUS COAL MINER

T. KNUROVSKY (Caltech), J. P. KISKIS (Caltech), and J. HARRIS (Caltech)

Apr. 1984

NPO-15166

Vol. 8, No. 1, P. 116

Continuous mining machine cuts coal in both directions of travel eliminating downtime caused by retreating across face to start new cut.

B83-10433

MINER FOR CUTTING ENTRY PASSAGES IN COAL SEAMS

T. KNUROVSKY (Caltech) and J. KISKIS (Caltech)

Apr. 1984

NPO-15167

Vol. 8, No. 1, PP. 116

Coal mining machine cuts swath wider than itself and cuts entry passages into coal seam in one pass.

B83-10434

DRILLING HOLES ON A LARGE BOLT CIRCLE

R. A. HIBDON (Boeing Services International)

Apr. 1984

KSC-11115

Vol. 8, No. 1, P. 116

Special machine tool creates circle of holes spaced and bored to accuracy of few thousandths of an inch.

B83-10435

TOOL FOR TAKING CLAY IMPRESSIONS

R. S. DUNCAN (Rockwell International Corp.)

Apr. 1984

MFS-19728

Vol. 8, No. 1, P. 116

Clay impression of small parts taken with tool consisting of hollow tube closed at one end. Slots at other end admit part short distance into tube. Impression used to make silicone rubber mold for examination.

B83-10436

TOOL FOR TIGHTENING BOLTS WITH KNURLED HEADS

J. G. SMITH and W. A. WALL

Apr. 1984

MFS-25694

Vol. 8, No. 1, P. 116

Modified clamp transfers torque to bolthead. Readily-available springloaded clamp modified, transfers measured torque to bolt with knurled head.

B83-10437

DAMPING SEALS FOR TURBOMACHINERY

G. L. VON PRAGENAU

Apr. 1984

MFS-25834

Vol. 8, No. 1, P. 117

Seals with rough surfaces proposed for stabilizing shaft motion and preventing leakage along shaft in machines such as turbopumps. Applicable to turbomachinery with speed limits raised and bearing life extended, avoiding costly shutdowns.

B83-10438

CONTROLLING SANDING DEPTH

C. E. FLOWERS (Rockwell International Corp.)

Apr. 1984

MFS-19713

Vol. 8, No. 1, P. 117

Sander mounted on traversing mechanism moved toward or away from workpiece by screw drive. Depth of sanding and position of sander on work is reliably controlled.

B83-10439

MEASURING RECESSED PINS

C. KOSTAS (Rockwell International Corp.) and W. PARKER (Rockwell International Corp.)

Apr. 1984

MFS-19673

Vol. 8, No. 1, P. 117

Sleeve-and-rod-tool measures distances in blind locations. Developed for measuring small distance from top of pin to body holding it.

B83-10440

LOCK FOR TUBE FITTINGS

L. A. HEIN and W. N. MYERS

Apr. 1984

MFS-25964

Vol. 8, No. 1, P. 117

Attachment for nuts of tube fittings locks fittings securely. Attachment includes covers for nut on tube fitting and nut on boss fitting.

B83-10441

TEST-BENCH DYNAMOMETER

G. S. PERKINS (Caltech)

Apr. 1984

NPO-15084

Vol. 8, No. 1, P. 117

Test bench confirms operating characteristics of motors and drive mechanisms.

B83-10442

BEARING MEASURING FIXTURE

W. D. MASON (Rockwell International Corp.)
Apr. 1984

MFS-19315 Vol. 8, No. 1, P. 117

Tool serves accurate base for making critical measurement of large bearing such as those in turbopumps.

B83-10443
STRIPPER FOR CABLES OF ANY CROSS SECTION

J. O. LONBORG (Caltech)

Apr. 1984

NPO-15631 Vol. 8, No. 1, P. 118

New wire stripper removes insulation from cable with noncircular cross sections as well as circular cross sections.

B83-10444
STAGING TWO-PHASE TURBINES

D. G. ELLIOTT (Caltech)

Apr. 1984

NPO-15037 Vol. 8, No. 1, P. 118

Staging method solves problem of friction loss and low efficiency of two phase (liquid/gas) flow in turbines by using high blade-tip speeds in first stage for progressively lower tip speeds in succeeding stages.

B83-10445
LOW-CONTAMINATION VIBRATING FEEDER FOR SILICON CHIPS

B. H. MACKINTOSH (Mobil Tyco Solar Energy Corp.)

Apr. 1984

NPO-15128 Vol. 8, No. 1, P. 118

Vibratory feeding is method of controlling flow of small oddly shaped particles. Technique applied to other materials that require contamination control by feeding material through vibrating troughs topped by particular material.

B83-10446
SELF-LOCATING LATCH

J. GIBSON and J. CALVERT

Apr. 1984

MFS-25956 Vol. 8, No. 1, P. 118

New latch secures fitting without displacing fitting and without regard to where on latch fitting makes initial contact.

B83-10447
TORQUE-WRENCH EXTENSION ARM

T. J. PACALA (Caltech), D. D. TRUJILLO (Caltech), and J. B. LAUDENSLAGER (Caltech)

Apr. 1984

NPO-15495 Vol. 8, No. 1, P. 118

Torque-wrench extension arm makes possible to apply torque to bolt, screw, or nut inaccessible to conventional wrenches or in areas where wrench cannot be manipulated. Used in narrow pockets and behind panels and walls.

B83-10656
LOW-VIBRATION OSCILLATING COMPRESSOR

P. A. STUDER

Nov. 1984

GSC-12799 Vol. 8, No. 2, P. 253

Oscillating compressor momentum compensated: produces little vibration in its supporting structure. Compressor requires no lubrication and virtually free of wear. Compresses working fluids such as helium, nitrogen or chlorofluorocarbons for Stirling-cycle refrigeration or other purposes. Compressor includes two mutually opposed ferromagnetic pistons of same shape and mass. Electromagnetic flux links both pistons, causing magnetic attraction between them.

B83-10659
VERTICAL-CONTROL SUBSYSTEM FOR AUTOMATIC COAL MINING

W. R. GRIFFITHS (Miller Associates, Inc.), M. SMIRLOCK (Miller Associates, Inc.), J. APLIN (Miller Associates, Inc.), R. B. FISH (Miller Associates, Inc.), and D. FISH (Miller Associates, Inc.)

Nov. 1984

MFS-25811 Vol. 8, No. 2, P. 254

Guidance and control system automatically positions cutting drums of double-ended longwall shearer so they follow coal seam. System determines location of upper interface between coal and shale and continuously adjusts cutting-drum positions, upward or downward, to track undulating interface. Objective to keep cutting edges as close as practicable to interface and thus extract as much coal as possible from seam.

B83-10660
TRANSPORTABLE PUMPS COULD SAVE OIL CARGOES

R. BURNS (IMA Resources, Inc.)

Nov. 1984

MFS-25881 Vol. 8, No. 2, P. 255

Transportable pumps designed for firefighting used to salvage crude oil from tankships leaking, burning, or grounded. Pump incorporated into self-contained transportable module along with engine and controls. Module carried by helicopter, boat, or van to site of fire provides large quantities of water at high pressure in firefighting mode or pump oil into barge in salvage mode.

B83-10661
MEMORY-METAL ELECTROMECHANICAL ACTUATORS

C. F. RUOFF (CALTECH)

Nov. 1984

NPO-15960 Vol. 8, No. 2, P. 256

Electrically controlled actuator produces predetermined force, torque, or displacement without motors, solenoids, or gears. Using memory-metal elements, actuator responds to digital input without electronic digital-to-analog conversion. To prevent overheating and consequent loss of hotted formed shape, each element protected by thermostat turns off current when predetermined temperature is exceeded. Memory metals used to generate fast mechanical response to electric signals.

B83-10662
DESIGNING MORE-EFFICIENT SPUR GEARS

S. H. LOEWENTHAL and N. E. ANDERSON (U.S. Army Aviation Research and Development Command)

Nov. 1984 See Also (NASA TM-81426 and NASA TM-81625)

LEW-13921 Vol. 8, No. 2, P. 257

Relatively simple method to calculate spur-gear system power loss for wide range of gear geometries and operating conditions developed. Method used to determine design requirements for efficient gearset. Effects of spur-gear size, pitch, ratio, pitch-line velocity and load on efficiency readily predictable with method. Analysis uses simple algebraic expressions to determine gear sliding, rolling, and windage losses and incorporates approximate ball-bearing power-loss expression. Predicted results show good agreement with published data.

B83-10663
TUBE ALINEMENT FOR MACHINING

J. GARCIA (Rockwell International Corp.)

Nov. 1984

MFS-19719 Vol. 8, No. 2, P. 258

Tool with stepped shoulders aligns tubes for machining in preparation for welding. Alinement with machine tool axis accurate to within 5 mils (0.13mm) and completed much faster than visual setup by machinist.

B83-10664
CONTROLLING THE FOCUS IN ELECTRON-BEAM WELDERS

D. I. MACFARLANE (Rockwell International Corp.) and K. W. SPIEGEL (Rockwell International Corp.)

Nov. 1984

MFS-19814 Vol. 8, No. 2, P. 259

Detector using two whirling wires measures focus of beam in electronbeam welder. Multiple-wire beam-sampling method provides for simple nullmeter focus indication easily

07 MACHINERY

controlled by operator. Detector not only operates at high beam currents but eliminates need for oscilloscope.

B83-10666

REUSABLE RELEASE MECHANISM

J. W. BUNKER (TransTechnology Corp.) and R. S. RITCHIE (TransTechnology Corp.)
Nov. 1984

MSC-20080

Vol. 8, No. 2, P. 261

Slider release mechanism reusable. Bears heavy loads while latched, yet gives smooth release motion. Release effected by explosively driving perpendicular slider out of engagement with load-bearing shank. Device has potential industrial applications such as emergency release of lifting cables from helicopters, cranes and hoists.

B83-10667

INSTALLATION/REMOVAL TOOL FOR SCREW-MOUNTED COMPONENTS

J. P. ASH (Rockwell International Corp.)

Nov. 1984

MSC-20606

Vol. 8, No. 2, P. 261

Tweezerlike tool simplifies installation of screws in places reached only through narrow openings. With changes in size and shape, basic tool concept applicable to mounting and dismantling of transformers, sockets, terminal strips and mechanical parts. Inexpensive tool fabricated as needed by bending two pieces of steel wire. Exact size and shape selected to suit part manipulated and nature of inaccessible mounting space.

B83-10668

FEEDBACK CONTROL OF ROTOR OVERSPEED

G. B. CHURCHILL

Nov. 1984

ARC-11404

Vol. 8, No. 2, P. 262

Feedback system for automatically governing helicopter rotor speed promises to lessen pilot's workload, enhance maneuverability, and protect airframe. With suitable modifications, concept applied to control speed of electrical generators, automotive engines and other machinery.

B83-10669

DOUBLE-POPPET VALVE

W. C. HUBER

Nov. 1984

MSC-20627

Vol. 8, No. 2, P. 263

New valve design includes two poppet/seat combinations actuated simultaneously. If one fails, other continues to seal against fluid flow. Valve primarily useful for handling dangerous fluids and lighter and more compact than comparable redundant-valve systems used at present.

B83-10670

TRIPLE-SEAL VALVE

W. C. HUBER

Nov. 1984

MSC-20628

Vol. 8, No. 2, P. 265

Handling of poisonous, flammable, or corrosive fluids made safer by new triple-seal valve concept. Three valves assembled in series, with stem mechanism for one valve serving as body of next valve. New design lighter and more compact than conventional three-series-valve combinations used with hazardous fluids.

B83-10671

SPHERICAL-BEARING ANALYSIS PROGRAM

R. J. KLECKNER (SKF Industries)

Nov. 1984

LEW-13626

Vol. 8, No. 2, P. 265

Computer program SPHERBEAN, developed to predict thermomechanical performance characteristics of double-row spherical roller bearings over wide range of operating conditions. Analysis allows six degrees of freedom for each roller and three for each half of an optionally split cage. Program capabilities provide sufficient generality to allow

detailed simulation of both high-speed and conventional bearing operation.

B83-10672

DEPTH GAGE FOR THREADED HOLES

M. A. KAHN (Rockwell International Corp.)

Nov. 1984

MFS-19884

Vol. 8, No. 2, P. 266

Tool for measuring threaded depth of tapped holes accurate and easy to use. Depth read from graduated scale on tool. Gives direct reading of depth, eliminating estimates and calculations. When tool is removed from hole, spring-loaded sleeve returns to zero.

B83-10673

STALLED-FLOW AND HEAD-LOSS MODEL FOR DIFFUSER PUMPS

S. Y. MENG (Rockwell International Corp.)

Nov. 1984

MFS-19748

Vol. 8, No. 2, P. 266

Modeling procedure approximates inlet transition zone (blade leading edge to blade throat) of diffuser pump as two-dimensional cascade, properties of which are well known. Model applied to stators as well as rotors. Procedure much faster than previous methods.

B83-10674

RETENTION MECHANISM FOR SPINNING OBJECTS

R. A. CLOYD

Nov. 1984

MFS-25957

Vol. 8, No. 2, P. 266

Mechanism enables controlled release of two rotating objects. Mechanism applicable to some kinds of motor starters, drive shafts, or other drive systems released while rotating.

B83-10675

MINIATURE ROTATOR

C. C. NEIL (RCA Corp.)

Nov. 1984

LAR-12765

Vol. 8, No. 2, P. 267

Device for making small, precise rotation of objects in cramped spaces consists of V-groove machined in block of aluminum (or nylon) and flat, slotted bar clamped across groove. Device used to rotate lenses until in precise alignment with optical axis of injection laser.

B83-10676

PREVENTING MOTOR DAMAGE DUE TO RAPID REVERSAL

R. FETTERS (Rockwell International Corp.)

Nov. 1984

MFS-19702

Vol. 8, No. 2, P. 267

Reversal switch takes more time to operate, allows gentler deceleration before reversal. Switch requires both twisting and pulling motion, giving motor time to decelerate gradually.

B83-10677

A ONE-HAND NUT AND BOLT ASSEMBLY TOOL

J. M. SPENCER (Rockwell International Corp.)

Nov. 1984

MFS-19691

Vol. 8, No. 2, P. 267

Special wrench speeds nut and bolt assembly when insufficient room to hold nut behind both hole with standard tool. C-clamp shaped box-and-socket-wrench assembly holds nut on blind side in alignment to receive bolt from open side.

B83-10678

PORTABLE POWER BROACH

A. J. APPLETON (Rockwell International Corp.)

Nov. 1984

MFS-19679

Vol. 8, No. 2, P. 267

Tool hand-held version of larger stationary broaching machines. Equipped with fittings and hoses to connect to

power source, small enough to be carried in field or used in confined spaces.

B83-10679

PRESSURE-DRIVEN WATERFLOW CLEANING DEVICE
R. RHEA (Rockwell International Corp.) and M. GANTS (Rockwell International Corp.)

Nov. 1984

MFS-19638

Vol. 8, No. 2, P. 267

High-Pressure gas mixed with water effective cleaner. Expanding gas bubbles in jet give more vigor to liquid. Fluid agitation effectively used to clean small, normally inaccessible cavity or passage.

B83-10680

TEMPORARY SEALING OF CAVITIES FOR LEAK TESTING

J. LITTLE (Rockwell International Corp.)

Dec. 1984

MFS-19646

Vol. 8, No. 2, P. 267

Wax Seals cavity openings to permit helium leak test of cavity welds. Technique facilitates leak testing of cavities in components of larger systems not otherwise sealed off at time leak testing done.

B83-10681

TRANSFORMER AND METER TESTER

R. M. STOMS (Rockwell International Corp.)

Nov. 1984

MFS-19708

Vol. 8, No. 2, P. 267

Numerically-controlled 5-axis machine tool uses transformer and meter to determine and indicate whether tool is in home position, but lacks built-in test mode to check them. Tester makes possible test, and repair of components at machine rather than replace them when operation seems suspect.

B83-10682

HYDRAULIC TUBE EXPANDER

R. K. BURLEY (Rockwell International Corp.)

Nov. 1984

MFS-19731

Vol. 8, No. 2, P. 268

Portable hydraulic tube expander expands small, thick-walled tubes in hard-to-reach locations. Tool particularly useful in situations where mechanical expander too fragile to produce desired expansion.

B83-10683

BURNER-INJECTOR-POST TIP

W. R. WAGNER (Rockwell International Corp.) and R. SAXELBY (Rockwell International Corp.)

Nov. 1984

MFS-19827

Vol. 8, No. 2, P. 268

Bimetallic tips attached to injector posts improve burner performance and reliability. Tip allows excess heat generated at tip to be dissipated circumferentially and axially through thermal conduction.

B83-10684

ATTACHING CHUCK KEYS TO MACHINE TOOLS

V. RICHARDSON (Boeing Services International)

Nov. 1984

KSC-11249

Vol. 8, No. 2, P. 268

Chuck keys attached to portable machine tools by retracting lanyards. Lanyard held taut by recoil caddy attached to tool base. Chuck key available for use when needed and safely secured during operation of tool.

B83-10685

RETROFITTING VIBRATION DAMPERS

T. C. ADAMS (Rockwell International Corp.) and J. PREMYSL (Rockwell International Corp.)

Nov. 1984

MFS-19790

Vol. 8, No. 2, P. 268

Method of installing support tubes allows retrofitting of vibration-reducing elements. Tubes deform elastically as

inserted and expand partially as gap becomes wider. Force-fit tubes eliminate fatigue problem.

B83-10686

WIRE ELECTRICAL-DISCHARGE MACHINING AID

T. GOLLIHUGH (Rockwell International Corp.)

Nov. 1984

MFS-19643

Vol. 8, No. 2, P. 268

Rerouting cutting wire by adding idler rollers allows standard wire electrical-discharge machine (WEDM) temporarily modified to permit some types of cuts otherwise blocked.

B83-10687

MOTORIZED CRYOGENIC VALVE

L. SALERNO, J. VORREITER, Y. MATSUMOTO, W. VAN ARK, and A. SPIVAK (Transbay Electronics, Inc.)

Nov. 1984

ARC-11452

Vol. 8, No. 2, P. 268

Remotely-controlled cryogenic valve operates over temperature range from room temperature to 2 K. Valve used in helium dilution refrigerators, cryostats and adiabatic-demagnetization refrigerators.

08 FABRICATION TECHNOLOGY

B83-10105

CURVED CAPS RAISE CORRUGATION STRENGTH

R. C. DAVIS, T. T. BALES, D. M. ROYSTER, and L. R. JACKSON

Aug. 1983

LAR-12884

Vol. 7, No. 3, P. 341

Construction concept increases strength-to-weight ratio of corrugated panels. Flat caps are replaced by curved caps in new concept for constructing corrugated panels. Geometry utilizes curved cap for wider cap/web attachment. Beading web prevents local buckling in web while allowing maximum separation between cap strips. Geometry offers significant weight saving over conventional geometry for wide range of loading.

B83-10106

SOLAR-CELL SLIDE RULE

K. A. YAMAKAWA (CALTECH)

Aug. 1983

NPO-15646

Vol. 7, No. 3, P. 342

Slide rule relates efficiency, impurity types, impurity concentrations, and process types. Solar cell slide rule calculations are determination of allowable impurity concentration for nonredistributive process, determination of impurity buildup factor for redistributive process and determination of allowable impurity concentration for redistributive process.

B83-10107

ULTRASONICS AND OPTICS WOULD CONTROL SHOT SIZE

A. D. MORRISON (CALTECH)

Aug. 1983

NPO-15608

Vol. 7, No. 3, P. 343

Feedback system assures production of silicon shot of uniform size. Breakup of silicon stream into drops is controlled, in part, by varying frequency of vibrations imparted to stream by ultrasonic transducer. Drop size monitored by photodetector. Control method particularly advantageous in that constant size is maintained even while other process variables are changed deliberately or inadvertently. Applicable to materials other than silicon.

08 FABRICATION TECHNOLOGY

B83-10108

REINFORCEMENT FOR STRETCH FORMED SHEET METAL

J. B. LEA (Vought Corp.) and C. R. BAXTER (Vought Corp.)
Aug. 1983

MSC-20228

Vol. 7, No. 3, P. 343

Tearing of aluminum sheet metal during stretch forming prevented by flame spraying layer of aluminum on edges held in stretch-forming machine. Technique improves grip of machine on metal and reinforced sheet better able to withstand concentration of force in vicinity of grips.

B83-10109

HOT-MELT ADHESIVE ATTACHMENT SYSTEM

R. L. FOX, A. W. FRIZZELL, B. D. LITTLE, D. J. PROGAR, R. H. COULTRIP, R. H. COUCH, B. A. STEIN, J. D. BUCKLEY, T. L. ST. CLAIR, and J. R. GLEASON (AVRAD-COM)

Aug. 1983

LAR-12894

Vol. 7, No. 3, P. 344

Adhesive system is as effective on Earth as in space. Fiberglass cloth mounted in head assembly. When adhesive reaches melt temperature head is attached to metals composites, ceramics, and other materials. Once attached, head cooled rapidly for quick stick. Used to tether tools or attach temporary scaffolding to walls, buildings, or beams.

B83-10110

HIGH-ABSORPTANCE RADIATIVE HEAT SINK

T. CAFFERTY (Hughes Aircraft Co.)

Aug. 1938

GSC-12739

Vol. 7, No. 3, P. 345

Absorptance of black-painted open-cell aluminum honeycomb improved by cutting honeycomb at angle or bias rather than straight across. This ensures honeycomb cavities escapes. At each reflection radiation attenuated by absorption. Applications include space-background simulators, space radiators, solar absorbers, and passive coolers for terrestrial use.

B83-10111

REWATERPROOFING SILICA TILES

L. J. LLEGER and D. C. WADE

Aug. 1983

MSC-20340

Vol. 7, No. 3, P. 345

Waterproofing agent, vaporized in bubbler transported by gas flowing in system and deposits in pores of tiles. Vapor carried through hole of approximately 1/16 inch (1.6mm) diameter made in tile coating. Technique used to waterproof buildups (concrete and brick) and possibly fabrics.

B83-10112

GAS-JET MENISCUS CONTROL IN RIBBON GROWTH

J. A. ZOUTENDYK (CALTECH) and O. VONROOS (CALTECH)

Aug. 1983

NPO-14978

Vol. 7, No. 3, P. 347

Gas jet used to control shape of meniscus and thus to regulate ribbon thickness in vertical silicon-ribbon growth. Gas jet also cools ribbon, increasing maximum possible pull speed for silicon, contact angle of 11 degrees plus or minus 1 degree required for constant thickness ribbon growth. Cooling effect of gas jet increases maximum possible pull speed.

B83-10113

ATTITUDE CONTROL BY LOCALIZED OUTGASSING

D. D. ELLEMAN (CALTECH), T. G. WANG (CALTECH), and A. CROONQUIST (CALTECH)

Aug. 1983

NPO-15575

Vol. 7, No. 3, P. 347

Attitude control of levitated object achieved by using laser to vaporize selectively sublimate coating. Laser heats material that will sublime or outgas. To obtain torque reaction force vector from subliming material must not pass through

center-of-mass of object. Laser provides beam suitable for controlling objects in noncontact manufacturing processes in acoustic levitation chambers.

B83-10114

MORE-UNIFORM HEAT CURING FOR STRUCTURAL REPAIRS

P. E. BAUER (McDonnell Douglas Corp.) and M. A. WALKER

Aug. 1983

MSC-20101

Vol. 7, No. 3, P. 348

Copper lining helps to distribute heat under heating blanket. Bond during setup employs heating blanket over copper sheet within vacuum bag. Copper sheet smooths out temperature distribution under hotspots in heater. Method applicable to uniformly heating such low-thermal-conductivity metals as titanium or stainless steel.

B83-10115

FABRICATION OF GRAPHITE/EPOXY COLUMN ELEMENTS

R. M. BLUCK (Lockheed Missiles & Space Co., Inc.), G. H. GROTEBECK (Lockheed Missiles & Space Co., Inc.), and W. M. REIGHARD (Lockheed Missiles & Space Co., Inc.)

Aug. 1983

LAR-12915

Vol. 7, No. 3, P. 348

Dimensionally precise columns wound on vertical mandrels. Dry fiber wound on tapered aluminum mandrel and outer sleeve. Winding and injection done at elevated temperature to minimize thermal-expansion problems during curing of resin. Technique used in textile industry.

B83-10116

LOW-WEIGHT INSERTS FOR ALUMINUM HONEYCOMB PANELS

G. S. BUMGARDNER (Vought Corp.) and M. W. REED (Vought Corp.)

Aug. 1983

MSC-20227

Vol. 7, No. 3, P. 349

Fiber/epoxy composites used in place of solid aluminum. New proposal suggests to make inserts out of such lightweight, high strength materials as fiber/epoxy composites or high density aluminum honeycomb. Composite insert is same size and shape as aluminum insert it replaces.

B83-10117

ACOUSTICAL-LEVITATION CHAMBER FOR METALLURGY

M. B. BARMATZ (CALTECH), E. TRINH (CALTECH), T. G. WANG (CALTECH), D. D. ELLEMAN (CALTECH), and N. JACOBI (CALTECH)

Aug. 1983

NPO-15453

Vol. 7, No. 3, P. 350

Sample moved to different positions for heating and quenching. Acoustical levitation chamber selectively excited in fundamental and second-harmonic longitudinal modes to hold sample at one of three stable positions: A, B, or C. Levitated object quickly moved from one of these positions to another by changing modes. Object rapidly quenched at A or C after heating in furnace region at B.

B83-10118

ACOUSTIC LEVITATION WITH LESS EQUIPMENT

M. B. BARMATZ (CALTECH) and N. JACOBI (CALTECH)

Aug. 1983

NPO-15562

Vol. 7, No. 3, P. 350

Certain chamber shapes require fewer than three acoustic drivers. Levitation at center of spherical chamber attained using only one acoustic driver. Excitation of lowest spherical mode produces asymmetric acoustic potential well.

B83-10119

PULL TEST VERIFIES GAP LOADING

G. R. HAGEN (Rockwell International Corp.)

Aug. 1983

MSC-20231

Vol. 7, No. 3, P. 352

Thin plastic strip pulled away from gap by force gage

to measure pressure applied on gap filler. Force necessary to initiate movement of thin plastic strip is measure of gap tightness. Procedure determines interface pressures or loads where conventional load-measuring equipment cannot be used. Used to check refrigerator-door seals.

B83-10120**ANNEALING SOLAR CELLS WITH LASERS**

J. S. KATZEFF (Lockheed Missiles & Space Co.) and M. LOPEZ

Aug. 1983

NPO-15694

Vol. 7, No. 3, P. 352

Laser anneals silicon solar cells rapidly enough for use in production. Laser frequently doubled neodymium:yttrium-aluminum-garnet (Nd:YAG) device. 30-m-diameter spot formed by lasers covers enough area to process silicon wafers rapidly. Laser annealed cells have efficiencies greater than 15 percent.

B83-10214**FABRICATING SLOTTED-WAVEGUIDE ARRAYS FROM SHEET METAL**

W. C. BROWN (Raytheon Co.)

Oct. 1983

NPO-15664

Vol. 7, No. 4, P. 457

Low-cost lightweight waveguides formed from rolls of aluminum. Array formed from sheared, punched, and bent aluminum sheets. Sheets aligned with punched jig holes and joined by laser-beam or resistance spot welding. Process permits use of thin metal to reduce raw material costs and mass. Also holds closer tolerances than usually attained in sheet-metal work.

B83-10215**FORMING MIRRORS ON COMPOSITE MATERIALS**

R. E. GAULDIN (CALTECH) and K. RAMOHALLI (CALTECH)

Oct. 1983

NPO-15912

Vol. 7, No. 4, P. 458

Smooth coatings deposited on hard-to-polish substrates. Lightweight mirror, leaning against conventional glass mirror, consists of metallic reflective layer on substrate coated with polyester resin. Smooth surface of polyester resin made by covering freshly applied resin with piece of smooth glass coated with release agent.

B83-10216**BETTER SEALS FOR VACUUM BAGS**

B. PENN and J. M. CLEMONS

Oct. 1983

MFS-25875

Vol. 7, No. 4, P. 459

Roller tool spreads even layer of adhesive. Tool easily constructed from metal, plastic, or wood. Sewing-thread spool serves as roller, nail as axle, and jigsawed block of wood as handle. Tool rolled and pressed against plastic film to assure even layer of adhesive around periphery.

B83-10217**ABSORBABLE-SUSCEPTOR WELDING OF CERAMICS**

J. E. SCHROEDER (Caltech) and P. J. SHLICHTA (Caltech)

Oct. 1983

NPO-15640

Vol. 7, No. 4, P. 460

Susceptor becomes part of joint. Susceptor is heated to high temperature by RF energy, then melts adjacent ceramic material. Susceptor dissolves in molten ceramic. When cooled, ceramic parts form monolithic assembly. Suitable for joining complex subassemblies in heat exchangers or other ceramic process equipment for high temperatures.

B83-10218**PREPARING SOLAR CELLS FOR SOLDERING**

J. J. HAGERTY (MB Associates)

Oct. 1983

NPO-15626

Vol. 7, No. 4, P. 461

Solder paste and contact ribbon dispensed in synchronism. Solder-paste dispenser operates on one cell at a time.

Ribbon fed up ramps and into positioned while solder paste is applied. When ramps are moved out of way, ribbon lies down onto cell.

B83-10219**REDUCING THE RESISTANCE OF CONDUCTIVE-ADHESIVE BONDS**

L. J. GUERTIN (Rockwell International Corp.), K. L. BILLINGTON (Rockwell International Corp.), and V. R. WARD (Rockwell International Corp.)

Oct. 1983

MSC-20427

Vol. 7, No. 4, P. 462

Current pulses lower resistance of silver-filled epoxies. Capacitive discharge reduces interfacial resistance between aluminum surfaces joined with silver-filled epoxy. Technique offers noninvasive solution to problem of attaching ground-ing brackets to aluminum honeycomb structures.

B83-10220**LIGHT, SERVICEABLE INSULATION BLANKET**

A. J. SWIRSLEY (Rockwell International Corp.)

Oct. 1983

MSC-20452

Vol. 7, No. 4, P. 462

Lightweight insulation blanket with aluminized, reinforced polyester facing resists crushing and weighs less than previous insulation blankets with textured stainless steel facing. New hook-and-loop fasteners facilitate installation and removal. Useful in vehicle construction and other application in which low weight, easy removability for repairs, and long service life are important.

B83-10221**ELECTRODEPOSITION REPAIR OF DAMAGED METAL PARTS**

M. KAUFMAN (Rockwell International Corp.) and J. RIETDYK

Oct. 1983

MFS-19783

Vol. 7, No. 4, P. 463

Damaged material replaced by electrodeposited copper. Channel restoration consists of alternately machining damaged material and reconstructing material by electrodeposition. Solid wax processed into coolant channels to provide plating surfaces that match original channel surfaces.

B83-10222**ELECTROLYTIC SHARPENING OF DIODE-CONTACT WHISKERS**

G. GREEN (University of Virginia) and R. J. MATTAUCH (University of Virginia)

Oct. 1983

NPO-15789

Vol. 7, No. 4, P. 464

Phosphor bronze wire pointed without highly-toxic chemical reagents. Phosphor bronze wire to be pointed affixed to metal post held by fixture, such as pin vise. Fixture moved axially by micrometer allows precise control of position of end of wire with respect to surface of pointing solution. Solution consists of 4 weight percent sulfamic acid crystals in deionized water. Dissolution current adjusted via the autotransformer setting.

B83-10223**FABRICATION OF STRUCTURAL CELLULAR GLASS**

W. D. MITCHELL (Solaramics, Inc.) and D. J. MAXWELL (Solaramics, Inc.)

Oct. 1983

NPO-15731

Vol. 7, No. 4, P. 465

Surface layer quickly heated and compressed. Postcellulation skin densification uses gas burners to heat lower surface of material and pinch rollers to compress heated-surface layer. Useful for manufacturing large low cost, parabolic dish solar collectors.

B83-10224**POLYMER BONDING OF OPTICAL FIBERS**

W. GOSS (Caltech) and M. D. NELSON (Caltech)

Oct. 1983

08 FABRICATION TECHNOLOGY

NPO-15464

Vol. 7, No. 4, P. 466

Optical waveguides coupled through their sides. In fiber etching process bonded length for coupling determined by observing optical output powers in two fibers. Surface tension of etchant remaining between two fibers holds them in contact when raised from solution for power measurement. When fibers reimmersed, they separate allowing free access by etchant.

B83-10225

X-RAY INSPECTION OF TRANSISTORS

W. P. HUBBARD (Caltech)

Oct. 1983

NPO-15675

Vol. 7, No. 4, P. 466

Component holder speeds examination of matched pairs. Transistors are oriented for two perpendicular x-ray views. Second view obtained by simply flipping block around corner near components, while corner remains in contact with film. Procedure allows inspection of up to 50 pairs - two views of each pair - on single x-ray film in same time previously required for 1 unmounted pair.

B83-10226

PRESSURE-REDUCTION TECHNIQUE FOR CRYSTAL GROWTH

P. J. SHLICHTA

Oct. 1981

NPO-15772

Vol. 7, No. 4, P. 467

Large crystals grown by varying pressure rather than temperature. In constant temperature pressure-reduction process crystal growth promoted as solubility decreases by factor of more than 10. Technique used to study crystal growth kinetics by 'pressure wave' analog of conventional 'thermal wave' experiments. Technique has advantages of faster response and freedom from convective interference.

B83-10227

PHASE MODULATION VARIES AVERAGE ACOUSTIC TORQUE

D. D. ELLEMAN (Caltech), A. P. CROONQUIST (Caltech), and T. G. WANG (Caltech)

Oct. 1983

NPO-15689

Vol. 7, No. 4, P. 468

Rotation of acoustically levitated objects controlled. Phase difference alternated between +90 degrees and -90 degrees. If system is at positive phase difference during greater portion of modulation cycle than at negative phase difference (or vice versa), there is nonzero time-averaged acoustic torque.

B83-10228

ELECTROSTATIC LEVITATOR WITH FEEDBACK CONTROL

W. K. RHIM (Caltech), M. M. SAFFREN (Caltech), and D. D. ELLEMAN (Caltech)

Oct. 1983

NPO-15553

Vol. 7, No. 4, P. 469

Sample position automatically maintained. Object levitated by electrostatic field between two electrodes. Because of particular curved electrode shape, levitation field has stable horizontal position on vertical axis of symmetry. Vertical position of object sensed and compared with preset value. When position error is detected, amplitude of levitating field is increased or decreased to restore zero error. System offers options well to containerless processing.

B83-10229

GAS-BEARING CRUCIBLE FOR SHOT TOWER

C. L. YOUNGBERG (Caltech), C. G. MILLER (Caltech), J. B. STEPHENS (Caltech), and A. A. FINNERTY (Caltech)

Oct. 1983

NPO-15070

Vol. 7, No. 4, P. 470

Device protects molten drops from contamination and distortion. Gas flowing through levitator tube levitates small balls while they melt. Gas heated by filament extending through center of tube. Gas bearing crucible on tube has

concave configuration to hold single relatively large ball or many recesses to hold many small balls. By time spheres reach foam, they are cooled sufficiently by radiation to retain their shape.

B83-10230

HOLLOW-SPHERE PRODUCTION LINE

M. C. LEE (Caltech)

Oct. 1983

NPO-15592

Vol. 7, No. 4, P. 471

After initial formation, spheroids processed without contaminating touch of solid objects. Spheroid in process supported by acoustic levitation at each work station and transported between stations by combination of acoustic levitation and acoustic propulsion. Automatic sequence of target-pellet fabrication allows no contact of solid object with spheroids in process. Potential for manufacture of precise microcapsules for catalysts and medications.

B83-10231

PRODUCING METALLIC GLASSES WITH ACOUSTIC LEVITATION

M. C. LEE (Caltech) and I. A. FENG (Caltech)

Oct. 1983

NPO-15658

Vol. 7, No. 4, P. 472

Acoustic fields support and cool liquid particles. Levitated by sound energy, liquid drop in acoustic standing-wave field surrounded by acoustically-induced jet streams. Streaming gas cools drop below its freezing point in small fraction of second. Allows new amorphous alloys including 'metallic glass' to be formed.

B83-10232

TEST PATTERN FOR IC'S

T. W. GRISWOLD (Caltech) and E. T. BATES JR. (Caltech)

Oct. 1983

NPO-15648

Vol. 7, No. 4, P. 473

Random-fault densities measured in array of standard structures. Test pattern is array of standard circuit elements built into circuit chip along with, or in lieu of, integrated circuit objective process. Measurements on ray made and interpreted so fabrication process can be corrected as necessary.

B83-10233

QUALITY-PLANNING-REQUIREMENTS DOCUMENTS

P. A. LEONARD (Rockwell International Corp.) and A. FLORES (Rockwell International Corp.)

Oct. 1983

MSC-20280

Vol. 7, No. 4, P. 474

Report outlines planning procedures used in establishing inspection and quality assurance activities required of contractors constructing and testing Space Shuttle and ground-support equipment. Report useful to contractors establishing inspection points in commercial manufacturing operations.

B83-10234

STUDIES OF THE INVERTED MENISCUS DEPOSITION OF SILICON ON CERAMIC

J. D. ZOOK (Honeywell, Inc.), B. GRUNG (Honeywell, Inc.), S. B. SCHULDT (Honeywell, Inc.), F. M. SCHMIT (Honeywell, Inc.), and J. D. HEAPS (Honeywell, Inc.)

Oct. 1983

NPO-15602

Vol. 7, No. 4, P. 474

Controlled temperature profiles essential to production of solar cells. Studies of inverted meniscus process for depositing silicon coatings on ceramic substrates described in new report. When fully developed, processed used to manufacture low-cost solar photovoltaic cells.

B83-10235

POLYMERIC APPLICATIONS IN ELECTRONICS

W. S. READ (Caltech)

Oct. 1983

NPO-16081

Vol. 7, No. 4, P. 475

Training manual shows how to use polymeric materials in fabrication electronic components. Report discusses polymeric applications in fabrication of electronic components and equipment. Intended as training manual for 6-day quality assurance and technician certification course in use of polymeric materials.

B83-10236
LOW-COST ALTERNATIVES IN HYBRID MICROCIRCUIT PACKAGING

S. V. CARUSO (Rockwell International Corp.), V. L. CHAMPION (Rockwell International Corp.), R. N. BASSETT (Rockwell International Corp.), and J. N. GAYER (Rockwell International Corp.)
Oct. 1983

MFS-25809 Vol. 7, No. 4, P. 475

Adhesive sealing, nickel plating, and multiwire boards evaluated. Based on study involving fully developed hardware, report considers adhesive packaging instead of seam welding, nickel-plated Kovar (commercial Fe/Ni/Co alloy) packages instead of gold plates ones, and multiwire circuit boards instead of multilayer boards as alternatives for reducing cost of hardware without reducing reliability.

B83-10237
THERMAL MODELING OF BRIDGMAN CRYSTAL GROWTH

E. COTHRAN

Oct. 1983

MFS-27003 Vol. 7, No. 4, P. 475

Heat Flow modeled for moving or stationary rod shaped sample inside directional-solidification furnace. Program effectively models one-dimensional heat flow in translating of motionless rod-shaped sample inside of directional-solidification furnace in which adiabatic zone separates hot zone and cold zone. Applicable to systems for which Biot numbers in hot and cold zones are less than unity.

B83-10448
LIGHTWEIGHT METAL MIRRORS

E. GOSSETT (Hughes Aircraft Co.) and P. WINSLOW (Hughes Aircraft Co.)

Apr. 1984

GSC-12743 Vol. 8, No. 1, P. 121

Two 'eggcrate' halves brazed together. Lightweight flat mirrors fabricated by machining pockets in two plates of beryllium and brazing machined halves together. Mirror less than half weight of same mirror made by previous design.

B83-10449
FOIL PANEL MIRRORS FOR NONIMAGING APPLICATIONS

D. J. KUYPER (Hughes Aircraft Co.) and A. A. CASTILLO

Apr. 1984

GSC-12751 Vol. 8, No. 1, P. 122

Large durable, lightweight mirrors made by bonding thick aluminum foil to honeycomb panels or other rigid, flat backings. Mirrors suitable for use as infrared shields, telescope doors, solar-furnace doors, advertising displays, or other reflectors that require low thermal emissivity and high specularity but do not require precise surface figure necessary for imaging.

B83-10450
HANDLING FIXTURE FOR SOLAR-CELL ARRAYS

P. A. DILLARD (Lockheed Missiles & Space Co., Inc.) and D. W. HIGBEE (Lockheed Missiles & Space Co., Inc.)

Apr. 1984

NPO-15908 Vol. 8, No. 1, P. 123

Thin cells processed and stored safely. Major parts of handling fixture hold components of solar cell array modules safely, yet allow assembly process to proceed without interference. Fixture used with or without internal vacuum.

Concept allows handling of thin, relatively-fragile cells, and offers potential for savings in silicon material and cost.

B83-10451
BETTER THERMAL INSULATION IN SOLAR-ARRAY LAMINATORS

D. R. BURGER (Caltech) and J. F. KNOX (Caltech)

Apr. 1984

NPO-15925 Vol. 8, No. 1, P. 124

Glass marbles improve temperature control. Modified vacuum laminator for photovoltaic solar arrays includes thermal insulation made of conventional glass marbles. Marbles serve as insulation for temperature control of lamination process at cure temperatures as high as 350 degrees F. Used to replace original insulation made of asbestos cement.

B83-10452
EDGE SUPPORTS FOR PHOTOVOLTAIC MODULES

T. J. MALONEY (AIA Research Corp.)

Apr. 1984

NPO-15740 Vol. 8, No. 1, P. 125

Mounting strips patterned after glazing gaskets. Easy to install supports for rooftop solar modules consist of extruded rubber mullions with locking zippers. Supports cut to length with utility knife and installed without special tools. Adaptable to many different roof configurations.

B83-10453
PHOTOVOLTAIC ROOFS

R. W. DRUMMOND JR. (General Electric Co.) and N. F. SHEPARD JR. (General Electric Co.)

Apr. 1984

NPO-15881 Vol. 8, No. 1, P. 126

Solar cells perform two functions: waterproofing roof and generating electricity. Sections through horizontal and slanting joints show overlapping modules sealed by L-section rubber strips and side-by-side modules sealed by P-section strips. Water seeping through seals of slanting joints drains along channels. Rooftop photovoltaic array used watertight south facing roof, replacing shingles, tar, and gravel. Concept reduces cost of residential solar-cell array.

B83-10454
LABELING SOLAR-CELL MODULES

E. G. WATSON (RCA Corp.) and P. J. COYLE (RCA Corp.)

Apr. 1984

NPO-15997 Vol. 8, No. 1, P. 127

Photocopying machine produces durable identification label. Process used for double glass photovoltaic-cell modules. Matrix of cells sandwiched between thin, flexible glass mats and covered above and below by protective sheets of glass. Label contains such information as manufacturer, model number, voltage and power ratings, and serial number. May also contain electrical-shock hazard warning and identification of positive and negative terminals. Method saves expense of procuring and applying conventional labels.

B83-10455
OSCILLATING-CRUCIBLE TECHNIQUE FOR SILICON GROWTH

T. DAUD (Caltech), K. A. DUMAS (Caltech), K. M. KIM (IBM Corp.), G. H. SCHWUTTKKE (IBM Corp.), and P. SMETANA (IBM Corp.)

Apr. 1984

NPO-15938 Vol. 8, No. 1, P. 127

Technique yields better mixing of impurities and superior quality crystals. Accelerated motion stirs melt which reduces temperature gradients and decreases boundary layer for diffusion of impurities near growing surface. Results better mixing of impurities into melt, decrease in tendency for dendritic growth or cellular growth and crystals with low dislocation density. Applied with success to solution growth and Czochralski growth, resulting in large crystals of superior quality.

08 FABRICATION TECHNOLOGY

B83-10456

IMPROVED RADIATIVE CONTROL OF RIBBON GROWTH
J. P. MCHUGH (Westinghouse Electric Corp.), R. G. SEIDENSTICKER (Westinghouse Electric Corp.), and M. E. SKUTCH (Westinghouse Electric Corp.)
Apr. 1984

NPO-15916; NPO-15917; NPO-15918 Vol. 8, No. 1, P. 128
Shield modifications enhance growth rate while reducing silicon oxide formation. Control of dendritic-web crystal growth requires precise control of web temperature profile. Achieved by using series of thermal radiation shields to control thermal-radiation field in region where melt solidifying onto crystal ribbon being pulled from melt.

B83-10457

COLD-CRUCIBLE PREMELTER FOR SILICON
R. L. LANE (Kayex Corp.)
Apr. 1984

NPO-16050 Vol. 8, No. 1, P. 130
System allows replenishment of silicon melt in crystal puller. Cold crucible consists of water-cooled, silver plated boat in 500kHz field. Induced secondary currents cause preheated chunks of silicon to melt. Magnetic repulsion between current in silicon and in boat prevents silicon from touching boat. Used for crystal growth of other materials sufficiently conductive and difficult to keep free of contamination by container walls at temperature of operation.

B83-10458

STARTING SILICON-RIBBON GROWTH AUTOMATICALLY

J. P. MCHUGH (Westinghouse Electric Corp.)
Apr. 1984

NPO-15919 Vol. 8, No. 1, P. 130
Semiautomatic system starts growth of silicon sheets more reliably than system with purely manual control. Control signals for starting sheetcrystal growth consist of ramps (during which signal changes linearly from one value to another over preset time interval) and soaks (during which signal remains constant). Ramps and soaks for best temperature and pulling speed determined by experimentation.

B83-10459

GROWING SINGLE-CRYSTAL SHEETS BY CONTROLLED COOLING

A. D. MORRISON (Caltech)
Apr. 1984

NPO-15800; NPO-15827 Vol. 8, No. 1, P. 131
Immersed heating and cooling elements establish desired temperature gradients. Method envisions use of high-pressure, Czochralski crystalgrowth apparatus as presently employed to grow gallium arsenide and gallium phosphide but modified to accept deep crucibles so deep layers of encapsulant used, plus X-ray or optical or sonic-imaging system to observe growth of crystal submerged in encapsulant. Method especially applicable to horizontal growth of ribbons of compound semiconductors.

B83-10460

INTERSTITIAL COLLIMATING HOLES FOR GAS-LEVITATION MICROFURNACE

E. G. DUNN (Bjorksten Research Laboratories, Inc.), E. G. PAQUETTE (Bjorksten Research Laboratories, Inc.), E. C. ETHRIDGE (Bjorksten Research Laboratories, Inc.), and J. L. JOHNSON (Bjorksten Research Laboratories, Inc.)
Apr. 1984

MFS-25829

Vol. 8, No. 1, P. 132
Spaces between small rods direct gas flow. Wires for thin rods clamped in square array in precise square groove. Spaces between wires are long, thin, parallel channels that direct flow of gas. Technique extended to such hard-to-machine refractory metals as tungsten and molybdenum.

B83-10461

OFF-RESONANCE ACOUSTIC LEVITATION WITHOUT

ROTATION

M. B. BARMATZ (Caltech) and J. L. ALLEN (Caltech)
Apr. 1984

NPO-15634

Vol. 8, No. 1, P. 133
Orthogonal acoustic-levitation modes excited at slightly different frequencies to control rotation. Rotation of object in square cross-section acoustic-levitation chamber stopped by detuning two orthogonal (x and y) excitation drivers in plane of square cross section. Detuning done using fundamental degenerate modes or odd harmonic modes.

B83-10462

SONIC-PUMP LEVITATOR

S. A. DUNN (Bjorksten Research Laboratories, Inc.), A. R. POMPLUN (Bjorksten Research Laboratories, Inc.), E. C. ETHRIDGE (Bjorksten Research Laboratories, Inc.), and J. L. JOHNSON (Bjorksten Research Laboratories, Inc.)
Apr. 1984

MFS-25828

Vol. 8, No. 1, P. 134
Audiospeaker drives gas and rapidly responds to corrective signals. Audiospeaker drives gas through plate opening and columnar outlets to levitate sphere. Exhaust flow dominated by gas momentum and essentially parallel to axis of outlets. With appropriate scaling up of hardware, sonic pump can function as levitator for containerless processing of more massive specimens of higher densities and of different materials.

B83-10463

IN SITU COMPOSITE FASTENER

W. T. FREEMAN JR., W. S. JONES, and G. L. FARLEY
(U.S. Army Aviation Research and Development Command)
Apr. 1984

LAR-12939

Vol. 8, No. 1, P. 135
Fasteners installed prior to curing. In situ composite fastener polymeric, graphite, glass, or metallic thread, pin, or staple. Selected fastener pressed through thickness of composite component while composite is in prepreg or B-stage state. Parts not removed from mold to install fastener. Technique used around cutouts to prevent free edges from delaminating.

B83-10464

REPAIRING DAMAGED POWER-CABLE INSULATION

G. E. BAKER (Boeing Services International)
Apr. 1984

KSC-11206

Vol. 8, No. 1, P. 136
Simple method saves time, money, and material. In new method cable remains in place while new insulation is applied to damaged portion. Method results in new terminations with safety factor equal to that of any portion of cable.

B83-10465

GROWING CRYSTALS FOR INFRARED DETECTORS

S. L. LEHOCZKY (McDonnell Douglas Corp.) and F. R. SZOFRAN (McDonnell Douglas Corp.)
Apr. 1984

MFS-25786

Vol. 8, No. 1, P. 136
Unidirectional solidification yields bulk crystals with compositional homogeneity. Unidirectionally crystal-growth furnace assembly travels vertically so crystal grows upward from bottom tapered end of ampoule. Separately controlled furnaces used for hot (upper) and cold (lower) zones. New process produces ingots with radial compositional homogeneity suitable for fabricating infrared detectors.

B83-10466

LIQUID-OXYGEN-COMPATIBLE CEMENT FOR GASKETS

N. L. ELMORE (Rockwell International Corp.) and B. C. NEALE (Rockwell International Corp.)
Apr. 1984

MFS-19797

Vol. 8, No. 1, P. 138
Fluorelastomer and metal bonded reliably by new procedure. To cure fluorelastomer cement, metal plate/gasket assembly placed in vacuum bag evacuated to

minimum vacuum of 27 inches (69 cm) of mercury. Vacuum maintained throughout heating process and until assembly returns to ambient room temperature. Used to seal gaskets and O-rings or used to splice layers of elastomer to form non-standard sized O-rings. Another possible use is to apply protective, liquid-oxygen-compatible coating to metal parts.

B83-10467
FABRICATION OF HOLLOW SPHERES

J. M. KENDALL JR. (Caltech)

Apr. 1984

NPO-15798

Vol. 8, No. 1, P. 138

Nozzle forms gas-filled spherical shells of high dimensional uniformity. Hollow-Sphere shell generator produces gas-filled metal sphere at rate of about 100 per second with repeat ability in all dimensions. Sphere filled with gas at pressure as high as 2,000psi. Process well suited for making targets for laser fusion.

B83-10468
INTERFACE INSTABILITY DURING CRYSTAL GROWTH

W. A. TILLER (Stanford University), R. S. FEIGELSON (Stanford University), and D. ELWELL (Stanford University)

Apr. 1984

MFS-25841

Vol. 8, No. 1, P. 139

Report on study of solute segregation and interface stability during crystal growth describes new theoretical model for crystal growth from melt. Report also describes experiments in crystal growth by controlled-gradient freezing and by pulling from melt (Czochralski growth).

B83-10469
ERECTABLE SPACE-CONSTRUCTION FIXTURE

R. R. THOMPSON (Rockwell International Corp.)

Apr. 1984

MSC-20259

Vol. 8, No. 1, P. 140

Concept for erectable space construction fixture described in report. Fixture combines all equipment required for construction of framework for space platform into single compact work station. Almost all aspects of assembly and fabrication automated. Design goals for fixture include platform assembly in shortest possible time and minimizing fuel and power requirements of support spacecraft.

B83-10470
RAPID CIRCUIT BREADBOARDING

E. C. ETHRIDGE

Apr. 1984

MFS-25761

Vol. 8, No. 1, P. 140

Cost of one-of-a-kind circuit board reduced. Circuits assembled quickly by using prototyping board in conjunction with copper-clad circuit board that has same hole pattern.

B83-10471
IMPROVED SILICON-GROWTH CHAMBER

J. D. HEAPS (Honeywell, Inc.) and J. D. ZOOK (Honeywell, Inc.)

Apr. 1984

NPO-15237

Vol. 8, No. 1, P. 141

Silicon-growth technique, based on coating ceramic substrates with thin layer of molten silicon solidifies to form polycrystalline film, modified to produce solar-cell quality silicon sheet.

B83-10472
GROWING SINGLE CRYSTALS FROM LOW-PURITY SILICON

F. SCHMID (Crystal Systems, Inc.)

Apr. 1984

NPO-15538

Vol. 8, No. 1, P. 141

Heat exchanger method continuously moves impurities to outside of growth interface. Silicon heated in crucible to above melting point, and melted silicon then solidified by extracting heat from bottom of crucible by means of heat exchanger.

B83-10473
MELT-LEVEL SENSING IN SILICON-WEB GROWTH

C. S. DUNCAN (Westinghouse Electric Corp.), M. E. SKUTCH (Westinghouse Electric Corp.), and K. B. STEINBRUEGGE (Westinghouse Electric Corp.)

Apr. 1984

NPO-15356

Vol. 8, No. 1, P. 141

Laser beam reflected from silicon-melt surface onto position detector to monitor melt level during web growth. Silicon web production increased by synchronizing silicon melt replenishment with web growth rate.

B83-10474
PROPOSED TECHNIQUE OF CRYSTAL-RIBBON GROWTH

J. W. THORNHILL (Caltech)

Apr. 1984

NPO-15629

Vol. 8, No. 1, P. 141

Technique for silicon crystal-ribbon growth from crucible, two inert wettable filaments dipped into silicon melt to guide growth of silicon sheet. Filaments clamped in place and tilted slightly away from each other and seed ribbon lowered into contact with melt to establish menisci between filaments.

B83-10475
SHIELD BOOSTS SILICON-GROWTH RATE

R. L. LANE (Kayex Corp.)

Apr. 1984

NPO-16049

Vol. 8, No. 1, P. 141

Radiation shield permits faster growth--by 20 percent--of singlecrystal silicon from molten silicon by producing sharper thermal gradients near growth front.

B83-10476
LOW-COST GAAS SOLAR CELLS

R. J. STIRN (Caltech) and J. SCOTT-MONCK (Caltech)

Apr. 1984

NPO-14914; NPO-14931

Vol. 8, No. 1, PP. 141

Single-crystal gallium arsenide (GaAs) solar cell produced at greatly reduced cost by replacing GaAs wafer substrate with silicon substrate.

B83-10477
PREVENTING MOISTURE DAMAGE TO SOLAR PANELS

E. G. LAUE (Caltech)

Apr. 1984

NPO-15481

Vol. 8, No. 1, P. 142

Encapsulating photovoltaic solar cells with polysulfonated membrane prevents moisture damage to cells. Gases escape through vents before damage can occur.

B83-10478
QUENCHING ALLOYS IN CONTAINERLESS PROCESSING

W. A. ORAN

Apr. 1984

MFS-25305

Vol. 8, No. 1, P. 142

Magnetic levitation and gas quenching combined in proposed method to melt and rapidly solidify alloys without contacting container walls. Method used to develop new carbides for drill bits, high-ductility structured steel and new high-strength superplastic alloys.

B83-10479
CONTAINERLESS-PROCESSING MODULE

T. G. WANG (Caltech), M. B. BARMATZ (Caltech), F. R. CHAMBERLAIN (Caltech), M. HAGAN (Caltech), R. C. HEYSER (Caltech), H. H. HORIUCHI (Caltech), J. H. KURASHITA (Caltech), J. K. LAMGMAIER (Caltech), R. L. ROBINSON (Caltech), R. P. SALAZAR (Caltech) et al

Apr. 1984

NPO-14932

Vol. 8, No. 1, P. 142

High-temperature, containerless-processing module positions and melts molten glass or metal without contact with container wall. Fluid masses manipulated, stirred, and

08 FABRICATION TECHNOLOGY

controlled by acoustic forces. Module provides photographic monitoring and transfer of solidified specimens to storage bins.

B83-10480 **VALUE-ENGINEERING REVIEW FOR NUMERICAL CONTROL**

J. L. WARNER (Rockwell International Corp.)
Apr. 1984

MFS-19664 Vol. 8, No. 1, P. 142
Selecting parts for conversion from conventional machining to numerical control, value-engineering review performed for every part to identify potential changes to part design that result in increased production efficiency.

B83-10481 **CHECKING WELD COMPOSITION**

M. D. ROBERTSON (Rockwell International Corp.) and S. M. COLLIER (Rockwell International Corp.)
Apr. 1984

MFS-19628 Vol. 8, No. 1, P. 143
Electrolytic etching determines whether certain iron/nickel alloys welded with sufficient quantities of desired filler metal.

B83-10482 **ADHESIVE REMOVAL FROM PROTECTIVE CLOTHING**

D. R. PRATHER (The Bendix Corp.)

KSC-11017 Vol. 8, No. 1, P. 143
Electrical eraser removes butyl cement from protective coveralls. Method used to remove other adhesives from different surfaces.

B83-10483 **PORTABLE PLATING SYSTEM**

R. FLORES (Rockwell International Corp.)
Apr. 1984

MFS-19631 Vol. 8, No. 1, P. 143
Plating system mounted on portable cart includes 30-gallon (23.5 liter) electrolyte tank, filler pump, heaters, replenishing anodes, plating rectifiers and tank rectifier to continuously remove contaminants.

B83-10484 **REPAIRING DEFECTIVE WELDS**

T. ADAMS (Rockwell International Corp.)
Apr. 1984

MFS-19618 Vol. 8, No. 1, P. 143
Welds not reworked because limited accessibility or material-annealing considerations reinforced by electrodeposition. Procedure of interest for nuclear reactor construction.

B83-10485 **WICKING COATING FOR HEAT PIPES**

W. K. MINNICH (General Electric Co.)
Apr. 1984

NPO-15212 Vol. 8, No. 1, P. 143
Wicking for inside of heat pipes and heat-storage canisters formed by flame-spraying porous coating over wire mesh placed on surface to be treated. Method less expensive than method currently used.

B83-10486 **DECOUPLING A REFLECTING LAYER FROM ITS SUPPORT STRUCTURE**

R. M. BAMFORD (Caltech)
Apr. 1984

NPO-15346 Vol. 8, No. 1, P. 143
Mounting decouples thermal distortions of reflective surface so not transmitted to support structure. Reflecting layer consists of aluminum reflecting tiles attached to support structure by flexural mounting bend and twist to accommodate thermal expansion of tiles. Technique useful in microwave-antenna reflectors.

B83-10487

SEALANT APPLICATOR FOR FASTENER HEADS

M. H. SHARPE, C. H. JACKSON, J. D. LAMBERT, C. HENDERSON, and W. E. NORTON
Apr. 1984

MFS-25922 Vol. 8, No. 1, P. 144
Dispenses sealant, either manually or automatically, in predetermined amounts. Applicator encapsulates heads of fasteners with measured shot of sealant to protect from corrosive environments.

B83-10688

BONDED LOCKSTITCH FOR INSULATING BLANKETS

J. M. RIVIN (Rockwell International Corp.), C. A. MORANT (Rockwell International Corp.), and R. M. EHRET (Rockwell International Corp.)

MSC-20283 Vol. 8, No. 2, P. 271
Improved sewing technique for high-temperature insulating blankets prevents stitch failure in hot, turbulent environments. Standard lockstitch modified to isolate single-stitch failures. Bobbin thread kept at blanket surface. Silicone adhesive applied to all bobbin/needle intersections, so failure at one point will not propagate along thread. Suitable for use in aerodynamic and other applications where there is turbulence.

B83-10689

REPAIRING HIDDEN CRACKS IN COOLANT TUBES

R. MILLS SR. (Rockwell International Corp.) and J. DUESBERG (Rockwell International Corp.)
Nov. 1984

MFS-19796 Vol. 8, No. 2, P. 272
Repair technique closes leaks in tubes or conduits where access limited to wall opposite crack. Technique applicable to any tubular assembly where tubes bundled together or bonded to supporting shell, such as in heat exchangers. Procedure provides structural support to area failed and uninterrupted flow without significantly altering heat-transfer profile.

B83-10690

AUTOMATIC GUIDANCE SYSTEM FOR WELDING TORCHES

H. SMITH, W. WALL, and M. BURNS JR.
Nov. 1984

MFS-25807 Vol. 8, No. 2, P. 273
Digital system automatically guides welding torch to produce squarebutt, V-groove and lap-joint weldments within tracking accuracy of ± 0.2 millimeter. Television camera observes and traverses weld joint, carrying welding torch behind. Image of joint digitized, and resulting data used to derive control signals that enable torch to track joint.

B83-10691

FITTING FLEXIBLE COVERINGS TO CONTOURED SURFACES

D. D. HELMAN (Rockwell International Corp.), S. Y. YOSHINO (Rockwell International Corp.), and D. S. WANG (Rockwell International Corp.)
Nov. 1984

MSC-20503 Vol. 8, No. 2, P. 274
Method using two transparent plastic sheets and polyethylene foam spacer produces flat templates from contoured surfaces. Once prepared, templates laid flat, and insulation inserted between two templates cut to shape to fit contoured surface. Sections of insulation prepared by contour-transferring technique fit contoured surfaces precisely. Procedure used for tailoring protective covers or for installation of vibrationabsorbing material over contoured surfaces.

B83-10692

IC FABRICATION METHODS IMPROVE LASER DIODES

M. MILLER (Perkin-Elmer Corp.) and V. PICKHARDT (Perkin-Elmer Corp.)

Nov. 1984 See Also NASA CR-165683

LAR-13059 Vol. 8, No. 2, P. 275

Family of high-performance, tunable diode lasers developed for use as local oscillators in passive laser heterodyne spectrometer. Diodes fabricated using standard IC processes include photolithography, selective etching and vacuum deposition of metals and insulators. Packaging refinements improved thermal-cycling characteristics of diodes and increased room-temperature shelf life.

B83-10693

ICE AS AN ABRADING AGENT

R. K. BLOW (Rockwell International Corp.)

Nov. 1984

MFS-19837

Vol. 8, No. 2, P. 276

Grit-blasting method makes unnecessary to disassemble equipment for cleaning. Stream of small, frozen pellets directed at assembly to be cleaned. Pellets consist of deionized-water ice, carbon dioxide ice, or another substance that does not react chemically with parts to be cleaned and leaves no residue. Method suited to cleaning titanium and parts that touch liquid oxygen.

B83-10694

FORMING LIGHTWEIGHT BEAMS FROM COMPOSITE TAPE

Innovator Not Given (Goldsworthy Engineering, Inc.) Nov. 1984

MFS-25880

Vol. 8, No. 2, P. 277

Hollow beams for assembling trusses and other structures produced from graphite/polysulfone tape. Process results in structures strong, light, and durable. Used to mass produce other lightweight parts besides beams.

B83-10695

POLYURETHANE FILLER FOR ELECTROPLATING

J. L. BEASLEY (Rockwell International Corp.)

Nov. 1984

MFS-19851

Vol. 8, No. 2, P. 277

Polyurethane foam proves suitable as filler for slots in parts electroplated with copper or nickel. Polyurethane causes less contamination of plating bath and of cleaning and filtering tanks than wax fillers used previously. Direct cost of maintenance and indirect cost of reduced operating time during tank cleaning also reduced.

B83-10696

RIBBED COOLANT LINERS FOR COMBUSTION CHAMBERS

W. R. WAGNER (Rockwell International Corp.)

Nov. 1984

MFS-19829

Vol. 8, No. 2, P. 278

Coolant-carrying liner for combustion chambers runs cooler and tolerates high-temperature excursions without burning out. Hot gases flowing through core prevented by liner from damaging shell. Concept applicable to such high-temperature chambers as rocket pre-burners, turbojet cans, stationary-turbine combustors, oil burners, and high-pressure chemical reactors.

B83-10697

LOCKING CORNERS SPEED SOLAR-ARRAY FRAME ASSEMBLY

S. OLAH (Applied Solar Energy Corp.) and W. J. SAMPSON (Applied Solar Energy Corp.)

Nov. 1984

NPO-15750

Vol. 8, No. 2, P. 279

Mitered corners of solar-array frames joined together by single angle brace and two springs. Locking corner braces and mating frame members pushed together by hand or assembled automatically. Fastening system used to assemble window screens and picture frames.

B83-10698

RIBBON REDUCES SPIKING IN ELECTRON-BEAM WELDING

R. E. OLSON (Rockwell International Corp.)

Nov. 1984

MFS-19701

Vol. 8, No. 2, P. 279

Spiking in electron-beam welding reduced by placing high-vaporpressure substance along path of electron beam. Strip of metal having vapor pressure higher than base metal at same temperature placed in slot machined along weld line. Strip vaporizes as beam strikes it, and vapor pressure keeps surface tension from closing off top of channel. Technique used successfully on nickel alloys and aluminum alloys and effective on steel and titanium.

B83-10699

LESS-COSTLY ION IMPLANTATION OF SOLAR CELLS

D. J. FITZGERALD (CALTECH)

Dec. 1984

NPO-15511

Vol. 8, No. 2, P. 280

Experiments point way toward more relaxed controls over ion-implantation dosage and uniformity in solar-cell fabrication. Data indicate cell performance, measured by output current density at fixed voltage, virtually same whether implant is particular ion species or broad-beam mixture of several species.

B83-10700

JOINING TUBES WITH ADHESIVE

W. A. BATEMAN (Rockwell International Corp.)

Dec. 1984

MFS-25958

Vol. 8, No. 2, P. 281

Cylindrical tubes joined together, end to end, by method employing adhesive, tapered ends, and spacing wires. Tapered joint between tubular structural elements provides pressure between bonding surfaces during adhesive curing. Spacing wires prevent adhesive from being scraped away when one element inserted in other. Method developed for assembling structural elements made of composite materials.

B83-10701

POSITIONING VISE FOR CRYSTAL CLEAVAGE

F. C. HALLBERG and C. J. MORGAN

Dec. 1984

GSC-12762

Vol. 8, No. 2, P. 282

Vise manipulates brittle crystals, such as lithium fluoride, so they are in proper position for cleaving. Vise allows crystals as thin as 2 millimeters or less positioned so that cleaved without breakage. Vise holds workpiece firmly but gently. Bushings, shafts and adjusting screw designed to move jaws smoothly and uniformly with great tactile sensitivity.

B83-10702

ULTRASONIC BONDING OF SOLAR-CELL LEADS

W. FRASCH (Kulicke and Soffa Industries, Inc.)

Dec. 1984

NPO-16140

Vol. 8, No. 2, P. 283

Rolling ultrasonic spot-bonding method successfully joins aluminum interconnect fingers to silicon solar cells with copper metalization. Technique combines best features of ultrasonic rotary seam welding and ultrasonic spot bonding; allows fast bond cycles and high indexing speeds without use of solder or flux. Achieves reliable bonds at production rates without damage to solar cells. Bonding system of interest for all solar-cell assemblies and other assemblies using flat leads (rather than round wires).

B83-10703

REPAIRABLE ENCAPSULATED ELECTRONIC MODULES

P. C. DOZOIS (CALTECH) and R. C. MAYNE (CALTECH)

Dec. 1984

NPO-15079

Vol. 8, No. 2, P. 284

Packaging technique seals electronic modules as effectively as potting in epoxy, yet permits removal of encapsulant when component change necessary. Technique encloses module in thin, rigid epoxy/fiberglass shell containing lightweight syntactic foam.

08 FABRICATION TECHNOLOGY

B83-10704

FABRICATION OF MULTI-PLY BIREFRINGENT FIBROUS COMPOSITE LAMINATES

I. DANIEL (ITT Research Institute) and T. NIRO (ITT Research Institute)

Dec. 1984 See Also NASA CR-165709

LAR-12960

Vol. 8, No. 2, P. 284

Fabrication method produces unidirectional, multi-ply, transparent birefringent fibrous composite laminates for use in macromechanical stress analysis conducted by means of anisotropic photoelasticity. New laminates glass-fiber-reinforced plastics for which matrix and fibers have same index of refraction. Method utilized in structural applications of composites.

B83-10705

MODIFIED FABRICATION FOR INGAASP STRIP LASER

I. LADANY (RCA Corp.) and T. R. FURMAN (RCA Corp.)

Dec. 1984

LAR-12986

Vol. 8, No. 2, P. 285

Improved fabrication of InGaAsP stripe lasers involves replacement of oxide stripe in quaternary laser by an n-type layer of InP grown on top of quaternary cap layer. Process allows use of stop etch that selectively removes InP and does not etch InGaAsP, making fabrication especially convenient.

B83-10706

FRAME ALLINES FIBERS IN MULTILAYER COMPOSITES

J. CLEMONS, F. LEDBETTER III, B. PENN, W. WHITE, and J. DANIELS

Dec. 1984

MFS-25959

Vol. 8, No. 2, P. 286

Jib ensures layers of fiber-reinforced preimpregnated tape correctly oriented in assembly of composite panels. Jig enables fast and reproducible alignment of fibers in multi-axis layups.

B83-10707

PHASE MODULATION STOPS LEVITATED SAMPLE ROTATION

M. B. BARMATZ (CALTECH) and J. H. BROWN (CALTECH)

Dec. 1984

NPO-16002

Vol. 8, No. 2, P. 286

Rotation of sample in acoustic levitator prevented by relatively simple phase-modulation scheme. Technique differs from older methods; no feedback control or observation of sample required, nor necessary to carefully tune or detune two oscillators to precise frequency differences from resonance.

B83-10708

PROCESSES FOR VLSI CIRCUITS

T. E. WADE (Mississippi State University)

Dec. 1984

MFS-25857

Vol. 8, No. 2, P. 287

Four-volume document reviews key technologies for interconnecting in very-large-scale integrated (VLSI) circuits. Document also discusses current and proposed research into novel fabrication techniques for interconnections.

B83-10709

OPTIMIZING GRID PATTERNS ON PHOTOVOLTAIC CELLS

D. R. BURGER (CALTECH)

Dec. 1984

NPO-15841

Vol. 8, No. 2, P. 288

CELICAL computer program helps in optimizing grid patterns for different photovoltaic cell geometries and metallization processes. Five different powerloss phenomena associated with front-surface metal grid pattern on photovoltaic cells.

B83-10710

OXIDATION PROTECTION FOR THERMOCOUPLES

R. RICHTER (CALTECH)

Dec. 1984

NPO-15605

Vol. 8, No. 2, P. 288

Thin platinum film on thermocouple sheath protects non-noble-metal thermocouples from deterioration in oxygen-rich atmosphere. Coating works on nickel-alloy sheathed thermocouples otherwise destroyed by corrosion in pure oxygen at 1,000 degrees C.

B83-10711

TOROIDAL ELLIPSOID FLOAT-ZONE HEATER

R. B. DAVIDSON (Technology Development Corp.)

Dec. 1984

MFS-25771

Vol. 8, No. 2, P. 288

Furnace heats and melts circumferential ring of material ('Float Zone') on round bar. In float-zone processing, bar pulled through furnace so zone travels along bar.

B83-10712

REPAIRING THERMAL TILES

C. R. MCCAIN JR. (Rockwell International Corp.) and C. W. FEILER (Rockwell International Corp.)

Dec. 1984

MSC-20336

Vol. 8, No. 2, P. 288

Small chips and depression in surfaces of surface insulation tiles repaired using Ludox colloidal silica solution and silica powder. No waiting time necessary between mixing filler and using it. Patch cures quickly without heat being applied.

B83-10713

BELLOWS WITH LONGITUDINAL BEAMS

W. GARVIN (Rockwell International Corp.)

Dec. 1984

MFS-19633

Vol. 8, No. 2, P. 289

Bellows assembled using two longitudinal side seams allow seam joints to be placed in axial directions of bellows. Design of particular importance in difficult situations where frequent assembly or repair required or in limited-access areas not desirable to disassemble total unit to replace one-piece bellows.

B83-10714

STRAIN ANALYSIS OF GRAPHITE/EPOXY VESSELS

V. VERDERAIME and M. RHEINFURTH

Dec. 1984

MFS-27018

Vol. 8, No. 2, P. 289

NASA Technical Paper discusses stiffness parameters of filament-wound graphite/epoxy pressure vessels. In some situations, lightweight composite substituted for steel.

B83-10715

ELECTROFORMED ELECTRODES FOR ELECTRICAL-DISCHARGE MACHINING

A. WERNER (Rockwell International Corp.) and M. CASIDENTI (Rockwell International Corp.)

Dec. 1984

MFS-19651

Vol. 8, No. 2, P. 289

Copper electrodes replace graphite electrodes in many instances of electrical-discharge machining (EDM) of complex shapes. Copper electrodes wear longer and cause less contamination of EDM dielectric fluid than do graphite electrodes.

B83-10716

SECURING IDENTIFICATION SLEEVING

E. P. SEIGGUM (Rockwell International Corp.)

Dec. 1984

MFS-19685

Vol. 8, No. 2, P. 289

Identification sleeving slides or bunches during handling or vibration held in place by shrinkage tubing. Tubing slid over one end of cable and shrunk with hand-held hot-air gun.

B83-10717

CRYOGENIC SEPARATION OF A CERAMIC FROM ITS MANDREL

E. W. COVINGTON III
Dec. 1984

LAR-12904 Vol. 8, No. 2, P. 289

Thermally sprayed ceramic released from its mandrel by immersing ceramic part and mandrel in cryogenic liquid. Technique takes advantage of difference in expansion coefficients.

B83-10718
PRESSURE/VACUUM BONDING FOR LOW-CURVATURE MIRRORS

P. O. FRICKLAND (CALTECH)

Dec. 1984

NPO-15613 Vol. 8, No. 2, P. 289

Pressure/vacuum bonding technique facilitates assembly of large solarconcentrator mirrors. Reflecting surfaces attached to nonreflecting substrates.

B83-10719
FLAME-TEST CHAMBER

R. A. BJORKLUND (CALTECH)

Dec. 1984

NPO-15407 Vol. 8, No. 2, P. 290

Experimental chamber provides controlled environment for observation and measurement of flames propagating in expanding plume of flammable air/fuel mixture under atmospheric conditions. Designed to evaluate quenching capability of screen-type flame arresters in atmospheric vents of fuel cargo tanks aboard marine cargo vessels.

B83-10720
AIRLOCK ENTRY

P. O. FRICKLAND (CALTECH) and E. L. CLELAND (CALTECH)

Dec. 1984

NPO-15415 Vol. 8, No. 2, P. 290

Proposed airlock retrofitted to air-inflated polymeric domes to accommodate large vehicles. Airlock inexpensive, simple to assemble, adaptable to any terrain and any size required, and requires no external power.

B83-10721
ADJUSTING THE CONTOUR OF REFLECTOR PANELS

W. B. PALMER (TRW, Inc.) and M. M. GIEBLER (TRW, Inc.)

Dec. 1984

NPO-15319 Vol. 8, No. 2, P. 290

Postfabrication adjustment of contour of panels for reflector, such as parabolic reflector for radio antennas, possible with simple mechanism consisting of threaded stud, two nuts, and flexure. Contours adjusted manually.

B83-10722
AUTOMATED VARIABLE-POLARITY PLASMA-ARC WELDING

A. NUNES JR., E. BAYLESS JR., S. JONES III, P. MUNAFO, A. MUNAFO, A. BIDDLE, and W. WILSON

Dec. 1984

MFS-27042 Vol. 8, No. 2, P. 290

Variable-polarity plasma-arc methods produces better welds at lower cost than gas-shielded tungsten-arc welding in assemblies. Weld porosity very low and costs of joint preparation, depeaking, inspection, and weld minimized.

B83-10723
WELDING TUBES IN PLACE

R. MEREDITH (North American Aviation, Inc.)

Dec. 1984

MFS-25714 Vol. 8, No. 2, P. 290

Special welding equipment joins metal tubes that carry pressurized cryogenic fluids. Equipment small enough to be used in confined spaces in which such tubes often mounted. Welded joints lighter in weight and more leak-proof than joints made with mechanical fittings.

B83-10724
HOT FORMING WITH ELECTRON-BEAM WELDER

R. K. DOBSON (Rockwell International Corp.) and E. L. WHIFFEN (Rockwell International Corp.)

Dec. 1984

MSC-20413 Vol. 8, No. 2, P. 290

Hot forming to restore size and shape of thin metal parts done with electron-beam welder. Work-piece heated in scanning defocused electron beam rather than conventional heat-treating furnace. Technique proved successful in straightening some thin flanges of nickel alloy and titanium.

B83-10725
MICROFISSURING IN ALLOYS DURING WELDING

Innovator Not Given (College of Engineering of Clemson University)

Dec. 1984

MFS-25604 Vol. 8, No. 2, P. 291

Evaluating cause of intergranular cracking (microfissuring) in high-temperature alloys during welding done by measuring number of microcracks as function of temperature and plastic strain. Two mechanisms of microfissuring in heat-affected zones suggested.

B83-10726
ACOUSTIC-LEVITATION CHAMBER

M. B. BARMATZ (CALTECH), D. GRANETT (CALTECH), and M. C. LEE (CALTECH)

Dec. 1984

NPO-16142 Vol. 8, No. 2, P. 291

Uncontaminated environments for highly-pure material processing provided within completely sealed levitation chamber that suspends particles by acoustic excitation. Technique ideally suited for material processing in low gravity environment of space.

B83-10727
MONITORING ACOUSTICALLY LEVITATED SAMPLES

T. A. GLAVICH (CALTECH), D. J. KERRISK (CALTECH), J. M. MCLAUCHIAN (CALTECH), J. K. LANGMAIER (CALTECH), and F. R. CHAMBERLAIN III (CALTECH)

Dec. 1984

NPO-15193 Vol. 8, No. 2, P. 291

Physical behavior of sample acoustically levitated in high-temperature oven optically monitored by new system. Optical system allows visible and infrared monitoring of sample.

B83-10728
SOLAR-CELL-MANUFACTURING SYSTEM

F. G. KELLY (TRW, Inc.)

Dec. 1984

MFS-25483 Vol. 8, No. 2, P. 291

Cost of manufacturing solar arrays minimized by using polyimide-ribbed substrates together with silver-plated coils of low-expansion nickel/iron ribbon on solar cells. Polyimide taped to ribbon protects cell from abrasion or from sticking to other tooling.

B83-10729
AUTOMATED ASSEMBLY OF SOLAR PANELS

J. J. HAGERTY (MB Associates)

Dec. 1984

NPO-16206; NPO-16207; NPO-16208; NPO-16209

Vol. 8, No. 2, P. 291

Robot places photoelectric cells in lamination chamber and removes cured panel. Automated process expected to lower cost of solar-panel fabrication.

B83-10730
PURIFYING SILICON DURING CRYSTAL GROWTH

P. J. SHLICHTA (CALTECH)

Dec. 1984

NPO-14831 Vol. 8, No. 2, P. 291

Direct current applied to molten silicon during crystallization causes impurities to migrate away from interface of

08 FABRICATION TECHNOLOGY

growing crystal. Method improves purity of crystal without interfering with growth process or requiring additional operator attention.

B83-10731
SILICON-FILM GROWTH BY CONTINUOUS EDGE-SUPPORTED MELT SKIMMING
G. H. SCHWUTTKER (CALTECH) and J. K. LIU (CALTECH)
Dec. 1984
NPO-15532 Vol. 8, No. 2, P. 292

Proposed technique grows thin sheets of silicon at high speeds with minimal contamination. Films grown in novel and continuous manner without presence of substrate.

B83-10732
ALIGNING SOLDER PADS ON A SOLAR CELL
A. G. LAZZERY (RCA Corp.)
Dec. 1984
NPO-15298 Vol. 8, No. 2, P. 292

Mechanism consisting of stylus and hand-operated lever incorporated into screening machine to precisely register front and back solder pads during solar-cell assembly. Technique may interest those assembling solar cells manually for research or prototype work.

B83-10733
TERMINAL SYSTEM FOR PHOTOVOLTAIC ARRAYS
T. J. MALONEY (AIA Research Corp.)
Dec. 1984
NPO-15739 Vol. 8, No. 2, P. 292

Quick-connect terminal system provides electrical contact and physical alignment between adjacent photovoltaic modules. Dual-ended plugs connect adjacent modules; single-ended plugs connect bus cables. No tools required to insert plugs and no live terminals exposed before, during, or after connection.

09 MATHEMATICS AND INFORMATION SCIENCES

B83-10121
INFORMATION-SYSTEMS DATA-FLOW DIAGRAM
J. O. BLOSIU (CALTECH)
Aug. 1983
NPO-15492 Vol. 7, No. 3, P. 355

Single form presents clear picture of entire system. Form giving relational review of data flow well suited to information system planning, analysis, engineering, and management. Used to review data flow for developing system or one already in use.

B83-10122
LARGE-SCALE SOFTWARE MANAGEMENT SYSTEM
G. L. KIRKLAND (International Business Machines Corp.)
Aug. 1983
KSC-11230 Vol. 7, No. 3, P. 356

Changes are organized and controlled according to consistent procedures. System contains two sets of libraries: baseline and development. Library is hierarchical catalog and file structure in which catalog levels and entries identify and delineate software components and functions within components. Especially suited to 'multi-flow' environment, in which there is more than one version of each software module.

B83-10123
PLANNING TRANSPORT AND MANUFACTURING FOR LOWEST COST
L. A. DAMARIO (CALTECH), D. V. BYRNES (CALTECH),

and R. H. STANFORD (CALTECH)

Aug. 1983
NPO-15391 Vol. 7, No. 3, P. 357

A method applicable to transportation and manufacturing. New algorithm alleviates some mathematical difficulties of planning segmented trajectories for lowest cost. Algorithm involves modified Newtonian iterative method in which periscope times, closest approach distances, and orientations of approach hyperbolas serve as independent variables.

B83-10124
SHUTTLE INVENTORY MANAGEMENT
(Innovator Not Given) Computer Services Division Aug. 1983
KSC-11219 Vol. 7, No. 3, P. 357

Inventory Management System (SIMS) consists of series of integrated support programs providing supply support for both Shuttle program and Kennedy Space Center base operations. SIMS controls all supply activities and requirements from single point. Programs written in COBOL.

B83-10238
DETERMINING NORMAL-DISTRIBUTION TOLERANCE BOUNDS GRAPHICALLY
M. A. MEZZACAPPA (Rockwell International Corp.)
Oct. 1983
MSC-20115 Vol. 7, No. 4, P. 480

Graphical method requires calculations and table lookup. Distribution established from only three points: mean upper and lower confidence bounds and lower confidence bound of standard deviation. Method requires only few calculations with simple equations. Graphical procedure establishes best-fit line for measured data and bounds for selected confidence level and any distribution percentile.

B83-10239
HARMONIC-BALANCE ALGORITHM FOR NONLINEAR SYSTEMS
J. R. MITCHELL (Mississippi State University) and O. L. BARRON (Mississippi State University)
Oct. 1983
MFS-25821 Vol. 7, No. 4, P. 480

Limit cycles identified in systems with multiple nonlinearities and multiple paths. Feedback control system or other physical system with feedback has several forward signal paths with both linear and nonlinear elements in each path. New algorithm finds limit cycles for systems of this configuration. Applied to systems of general type.

B83-10240
DIGITAL FILTERS FOR TWO-DIMENSIONAL DATA
T. R. EDWARDS
Oct. 1983
MFS-25790 Vol. 7, No. 4, P. 481

Computational efficient filters speed processing of two-dimensional experimental data. Two-dimensional smoothing filter used to attenuate high-frequency noise in two-dimensional numerical data arrays. Filter provides smoothed data values equal to values obtained by fitting surface with second and third-order terms to 5 by 5 subset of data points centered on points and replacing data at each point by value of surface fitted at point. Especially suited for efficient analysis of two-dimensional experimental data on images.

B83-10241
KSC CONSTRUCTION COST INDEX
J. A. BROWN
Oct. 1983
KSC-11252 Vol. 7, No. 4, P. 482

Kennedy Space Center cost index aids in conceptual design cost estimates. Report discusses development of KSC Cost Index since January 1974. Index since January 1974. Index provides management, design engineers, and estimators an up-to-date reference for local labor and

material process. Also provides mount and rate of change in these costs used to predict future construction costs.

B83-10242
CONCEPTUAL COST ESTIMATING

J. A. BROWN

Oct. 1983

KSC-11253

Vol. 7, No. 4, P. 482

Kennedy Space Center data aid in efficient construction-cost management. Report discusses development and use of NASA TR-1508, Kennedy Space Center Aerospace Construction price book for preparing conceptual budget, funding cost estimating, and preliminary cost engineering reports. Report based on actual bid prices and Government estimates.

B83-10243
FROST FORECASTING FOR FRUITGROWERS

J. D. MARTSOLF (University of Florida) and E. CHEN (University of Florida)

Oct. 1983 See Also NASA CR-166827 (N82-20607/NSP)

KSC-11241

Vol. 7, No. 4, P. 482

Progress in forecasting from satellite data reviewed. University study found data from satellites displayed in color and used to predict frost are valuable aid to agriculture. Study evaluated scheme to use Earth-temperature data from Geostationary Operational Environmental Satellite in computer model that determines when and where freezing temperatures endanger developing fruit crops, such as apples, peaches and cherries in spring and citrus crops in winter.

B83-10244

SOFTWARE SPECIFICATION LANGUAGE

B. P. BUCKLES (Science Applications, Inc.), J. P. RYAN (Science Applications, Inc.), and S. L. AUSTIN

Oct. 1983

MFS-23737

Vol. 7, No. 4, P. 483

SSL translator aids in developing and checking software systems. Goal of SSL is to provide form of verification and consistency checking early in design phase. Serves as formal document to communicate software architecture to detailed designers.

B83-10245

FOREST RESOURCE INFORMATION SYSTEM

R. P. MROCZYNSKI (Purdue University)

Oct. 1983

MSC-20270

Vol. 7, No. 4, P. 484

Twenty-three processing functions aid in utilizing LANDSAT data for forest resource management. Designed to work primarily with digital data obtained from measurements recorded by multispectral remote sensors mounted on aerospace platforms. communication between processing functions, simplicity of control, and commonality of data files in LARSFRIS enhance usefulness of system as tool for research and development of remote sensing systems.

B83-10246

SECURITY PACKAGE FOR THE VAX

V. J. MARKS (MATSCO) and C. E. BENIGUE (MATSCO)

Oct. 1983

MSC-20423

Vol. 7, No. 4, P. 484

Four programs deal with intruders and resource management. Package available from COSMIC provides DEC VAX-11/780 with certain 'deterent' security features. Although packages is not comprehensive security system, of interest for any VAX installation where security is concern.

B83-10488

PROCESSING OF SYNTHETIC-APERTURE-RADAR DATA

A. E. DI CENZO (Caltech)

Apr. 1984

NPO-15316

Vol. 8, No. 1, P. 147

Ambiguous data combined to permit fast-transform convolution. New data processor designed: two-dimensional

ensemble of range-correlated SAR data stored in memory and extracted in format for which azimuth data are colinear.

B83-10489

OBTAINING RUNGE-KUTTA SOLUTIONS BETWEEN TIME STEPS

M. K. HORN

Apr. 1984 See Also NASA TM-58239 (N82-21967/NSP)

MSC-20404

Vol. 8, No. 1, P. 148

New interpolation method used with existing Runge-Kutta algorithms. Algorithm evaluates solution at intermediate point within integration step. Only few additional computations required to produce intermediate solution data. Runge-Kutta method provides accurate solution with larger time steps than allowable in other methods.

B83-10490

ALGORITHM FOR CONSTRUCTING CONTOUR PLOTS

W. JOHNSON and F. SILVA (Informatics, Inc.)

Apr. 1984

ARC-11441

Vol. 8, No. 1, P. 148

General computer algorithm developed for construction of contour plots. algorithm accepts as input data values at set of points irregularly distributed over plane. Algorithm based on interpolation scheme: points in plane connected by straight-line segments to form set of triangles. Program written in FORTRAN IV.

B83-10491

HIDDEN-LINE COMPUTER CODE

D. R. HEDGLEY JR. (Dryden Flight Research)

Apr. 1984

ARC-11446

Vol. 8, No. 1, P. 149

New, efficient solution minimizes run time. Approach based on approved theorem provides formal basis for assuring generality and rapid execution. Theorem does not directly address nuisance of square law growth. Analysis of algorithm shows it tends to avoid square-law growth, and rigorous testing verified algorithm tends to enjoy almost linear growth.

B83-10492

FLOW CHART FOR MANAGEMENT

K. A. BLOM (Caltech)

Apr. 1984

NPO-15014

Vol. 8, No. 1, P. 149

Flow chart management tool presents organizational/staffing relationships, resource requirements and time dependent product-activity relationships on single chart.

B83-10493

THREE-LEVEL CONTROL OF MANIPULATORS

R. L. ZAWACKI (Caltech) and M. I. VUSKOVIC (Caltech)

Apr. 1984

NPO-15048

Vol. 8, No. 1, P. 149

Concept for control of remote manipulators based on three-level hierarchy allows complex tasks performed in real time. Developed for interactive human/control with sensory feedback.

B83-10494

CONTROL OF SELF-REPLICATING SYSTEMS

G. VON TIESENHAUSEN

Apr. 1984

MFS-25865

Vol. 8, No. 1, P. 150

Three concepts proposed for system management and control. Concepts are: internal system for autonomous management and control, separate system for environment monitoring, and optical intelligent system required in especially chaotic environments. Intelligent system responds by making decisions and solving problems in novel situations preprogramed.

B83-10495

TRAINING SIMULATOR FOR FIRE MANAGEMENT

K. A. SMITH, R. C. RODRIGUEZ, J. L. RANDOLPH, and

09 MATHEMATICS AND INFORMATION SCIENCES

R. T. HOWARD

Apr. 1984

MFS-25898

Vol. 8, No. 1, P. 150

Users manipulate resources in practicing fire-control strategy. Users manipulate resource information displayed on two separate monitors, as computer-generated messages and computer-controlled fire scenes.

B83-10496

GENERATING RANDOM NUMBER PAIRS

C. W. CAMPBELL

Apr. 1984

MFS-27039

Vol. 8, No. 1, P. 150

Algorithm generates pairs drawn from bivariate normal distribution with any desired values of two means, two standard deviations, and correlation coefficient.

B83-10734

EFFICIENT CODING FOR OPTICAL COMMUNICATION

R. J. MCELIECE (CALTECH)

Dec. 1984

NPO-15856

Vol. 8, No. 2, P. 295

Possibility of using photon counting, rather than conventional linear amplification, for optical communications discussed. Study suggests combination of pulse-position modulation and Reed-Solomon coding gives signaling efficiency of 3 to 4 bits/photon.

B83-10735

A FILE ARCHIVAL SYSTEM

J. L. FANSELOW (CALTECH) and J. L. VAVRUS (CALTECH)

Dec. 1984

NPO-16274

Vol. 8, No. 2, P. 295

ARCH, file archival system for DEC VAX, provides for easy offline storage and retrieval of arbitrary files on DEC VAX system. System designed to eliminate situations that tie up disk space and lead to confusion when different programmers develop different versions of same programs and associated files.

B83-10736

PSEUDO-RANDOM NUMBER GENERATORS

L. W. HOWELL and M. H. RHEINFURTH

Dec. 1984

MFS-27017

Vol. 8, No. 2, P. 296

Package features comprehensive selection of probabilistic distributions. Monte Carlo simulations resorted to whenever systems studied not amenable to deterministic analyses or when direct experimentation not feasible. Random numbers having certain specified distribution characteristic integral part of simulations. Package consists of collector of 'pseudorandom' number generators for use in Monte Carlo simulations.

B83-10737

SPIRE DATA-BASE MANAGEMENT SYSTEM

C. F. FUECHSEL

Dec. 1984

GSC-12684

Vol. 8, No. 2, P. 296

Spacelab Payload Integration and Rocket Experiment (SPIRE) data-base management system (DBMS) based on relational model of data bases. Data bases typically used for engineering and mission analysis tasks and, unlike most commercially available systems, allow data items and data structures stored in forms suitable for direct analytical computation. SPIRE DBMS designed to support data requests from interactive users as well as applications programs.

B83-10738

FORTTRAN STATIC SOURCE CODE ANALYZER

P. MERWARTH

Dec. 1984

GSC-12724

Vol. 8, No. 2, P. 297

FORTTRAN Static Source Code Analyzer program, SAP (DEC VAX version), automatically gathers statistics on

occurrences of statements and structures within FORTRAN program and provides reports of those statistics. Provisions made for weighting each statistic and provide an overall figure of complexity.

B83-10739

SOFTWARE DOCUMENT INVENTORY PROGRAM

P. D. MERWARTH

Dec. 1984

GSC-12803

Vol. 8, No. 2, P. 297

Program offers ways to file and locate sources of reference. DOCLIB system consists of two parts to serve needs of two type of users: general user and librarian. DOCLIB systems provides user with interactive, menu-driven document inventory capability.

B83-10740

NAMLIST PREPROCESSOR PROGRAM

P. D. MERWARTH

Dec. 1984

GSC-12711

Vol. 8, No. 2, P. 297

NAMLIST Preprocessor Program, NPP, provides DEC VAX with capabilities identical to IBM FORTRAN IV NAMELIST feature. NAMLIST provides FORTRAN programmer with additional, flexible input and output capabilities. Input data reviewed without elaborate formatting.

B83-10741

RESEARCH AND DEVELOPMENT MISSION ANALYSIS SYSTEM

W. A. TAYLOR (Computer Science Corp.)

Dec. 1984

GSC-12847

Vol. 8, No. 2, P. 297

Research and Development Mission Analysis System, RADMAS, facilitates solution of mission-analysis problems in research and development environment. System centers on executive structure that controls function selection and executing.

B83-10742

MODERN NUMERICAL METHODS FOR CLASSICAL SAMPLED SYSTEM ANALYSIS-SAMSAN

H. P. FRISCH


Dec. 1984

GSC-12827

Vol. 8, No. 2, P. 298

SAMSAN aids control-system analyst by providing self-consistent set of computer algorithms that support large-order control-system design and evaluation studies, with emphasis placed on sampled system analysis. Program provides set of algorithms readily integrated for solving control-system problems.

Typical Subject Index Listing

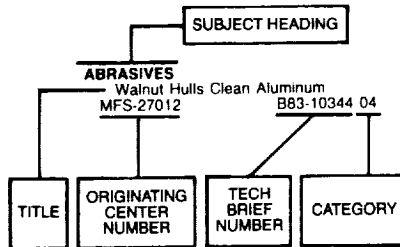

The title of each Tech Brief is listed under several selected subject headings to provide the user with a variety of approaches in his search for specific information. The Tech Brief number, e.g., B83-10344, is located under and to the right of the title and is followed by a two-digit number, e.g., 04, which designates the subject category in which the entire entry can be found.

A

ABERRATION

Submillisecond Optical Knife-Edge Testing
GSC-12740 B83-10025 03
Beam Splitter Introduces Little Aberration
NPO-15580 B83-10028 03

ABRASIVES

Walnut Hulls Clean Aluminum
MFS-27012 B83-10344 04
Ice as an Abrading Agent
MFS-19837 B83-10693 08

ACCESS CONTROL

A File Archival System
NPO-16274 B83-10735 09

ACCURACY

Power-Measurement Errors Due to Instrument Lag
NPO-15029 B83-10516 01
Accuracy Criterion for Structural Calculations
NPO-16008 B83-10634 06

ACOUSTIC LEVITATION

Attitude Control by Localized Outgassing
NPO-15575 B83-10113 08
Acoustical-Levitation Chamber for Metallurgy
NPO-15453 B83-10117 08
Acoustic Levitation With Less Equipment
NPO-15562 B83-10118 08
Phase Modulation Varies Average Acoustic Torque
NPO-15689 B83-10227 08
Hollow-Sphere Production Line
NPO-15592 B83-10230 08
Producing Metallic Glasses With Acoustic Levitation
NPO-15658 B83-10231 08

Off-Resonance Acoustic Levitation Without Rotation
NPO-15634 B83-10461 08
Sonic-Pump Levitator
MFS-25828 B83-10462 08
Containerless-Processing Module
NPO-14932 B83-10479 08
Phase Modulation Stops Levitated Sample Rotation
NPO-16002 B83-10707 08
Acoustic-Levitation Chamber
NPO-16142 B83-10726 08
Monitoring Acoustically Levitated Samples
NPO-15193 B83-10727 08

ACOUSTIC MEASUREMENT

Determining the Orientation of Anisotropic Materials
MSC-20229 B83-10054 06
Acoustic Emissions Reveal Combustion Conditions
NPO-15699 B83-10140 03
Monitoring the Thickness of Coal-Conversion Slag
NPO-15371 B83-10397 06
Acoustic Imaging of Combustion Noise
NPO-15698 B83-10547 03

ACUSTO-OPTICS

Obtaining Pulses From a CW Laser
NPO-15111 B83-10309 03

ACRYLIC RESINS

Binder for Carbon-Fiber Coating
NPO-14988 B83-10579 04

ACTIVATED CARBON

Dewatering Peat With Activated Carbon
NPO-15113 B83-10365 04

ACTUATORS

Low-Shock Pyrotechnic Actuator
LAR-13198 B83-10636 06
Memory-Metal Electromechanical Actuators
NPO-15960 B83-10661 07

ADAPTERS

Two-Wire to Four-Wire Audio Converter
KSC-11256 B83-10003 01
Clamp for Attaching Equipment to an I-Beam
MFS-25510 B83-10429 07
Tool for Tightening Bolts With Knurled Heads
MFS-25694 B83-10436 07

ADAPTIVE CONTROL

Self-Righting Objects
NPO-15023 B83-10399 06

ADDITIVES

Less-Costly Ion Implantation of Solar Cells
NPO-15511 B83-10699 08

ADHESION

Bonded Lockstitch for Insulating Blankets
MSC-20283 B83-10688 08

ADHESIVE BONDING

Hot-Melt Adhesive Attachment System
LAR-12894 B83-10109 08
Reducing the Resistance of Conductive-Adhesive Bonds
MSC-20427 B83-10219 08
Radiation Improves Materials Bonding
NPO-14995 B83-10364 04
Joining Tubes With Adhesive
MFS-25958 B83-10700 08

ADHESIVES

Standards for Epoxies Used in Microelectronics
MFS-25810 B83-10042 04
Sample Holder for Cryogenic Adhesive Shear Test
MFS-25729 B83-10060 06
Reducing the Resistance of Conductive-Adhesive Bonds
MSC-20427 B83-10219 08
Attaching Strain Gages to Composite Materials
MFS-25867 B83-10378 06
Heater Ensures Strain-Gage Bond Reliability
MFS 19859 B83-10619 06

ADJUSTING

Servo Lead Compensation
MFS-19614 B83-10513 01

AERIAL PHOTOGRAPHY

Telemetry Speeds Forest-Fire Control
ARC-11438 B83-10279 02

AERODYNAMIC CHARACTERISTICS

Wing Subsonic Aerodynamic Performance Estimates
LAR-12987 B83-10079 06

AERODYNAMIC CONFIGURATIONS

Improved Cattle Hauler
FRC-11058 B83-10020 03
Extended Vortex Lattice Method
LAR-13039 B83-10192 06
Interactive Graphics Analysis for Aircraft Design
LAR-12951 B83-10194 06

AERODYNAMIC DRAG

Instrument Measures Airflow Friction Without Contact
ARC-11354 B83-10047 06

AERODYNAMIC HEATING

Dissociated Airflow Effects During Plasma-Arc Testing
MSC-20522 B83-10185 06

AERODYNAMICS

Fast Generation of Boundary-Conforming O-Type Grids
LEW-13818 B83-10081 06

AEROSOLS

Silane Pyrolysis With Silicon-Seeded Aerosol
NPO-16054 B83-10591 04

AFTERBODIES

SUBJECT INDEX

AFTERBODIES

Transonic, Axisymmetric Flow Over
Nozzle Afterbodies With Supersonic Jet
Exhausts
LAR-12957 B83-10187 06

AIR CONDITIONING

Air-Conditioning for Electric Vehicles
NPO-15183 B83-10549 03

AIR DUCTS

Wind Turbine With Concentric Ducts
KSC-11191 B83-10086 07

AIR FLOW

Instrument Measures Airflow Friction
Without Contact
ARC-11354 B83-10047 06

Wind Turbine With Concentric Ducts
KSC-11191 B83-10086 07

Compressible Flow About Wind
Turbine Blades
LEW-13740 B83-10103 07

Dissociated Airflow Effects During
Plasma-Arc Testing
MSC-20522 B83-10185 06

Miniature Airflow Sensor
LAR-13065 B83-10603 06

In Situ Measurement of
Ground-Surface Flow Resistivity
LAR-13053 B83-10606 06

Identifying Boundary-Layer
Transitions on Aircraft Skin
LAR-13089 B83-10609 06

AIR PURIFICATION

Discharge Extracts Oxygen From
CO₂
ARC-11305 B83-10334 04

AIRCRAFT DESIGN

Subcritical Wing Design Code
LAR-12959 B83-10193 06

Shear-Panel Test Fixture Eliminates
Corner Stresses
LAR-12930 B83-10383 06

QUICK Interactive Graphics Analysis
LAR-12952 B83-10394 06

Transonic Airfoil Analysis
ARC-11436 B83-10395 06

General Aviation Synthesis Program
ARC-11434 B83-10396 06

AIRCRAFT INSTRUMENTS

Determining Aircraft Altitude
NPO-15386 B83-10402 06

AIRCRAFT NOISE

Reduced Aircraft-Engine Noise
LAR-12890 B83-10048 06

Noise Control in Propeller-Driven
Aircraft
LAR-12954 B83-10049 06

Predicting Aircraft Noise Levels
LEW-13778 B83-10077 06

Acoustic Imaging of Combustion
Noise
NPO-15698 B83-10547 03

AIRCRAFT PERFORMANCE

The Mission Radius and
Maneuverability Characteristics of
Fighter Aircraft
LAR-12908 B83-10631 06

Takeoff and Landing of Transport
Aircraft
LAR-13086 B83-10633 06

AIRCRAFT STRUCTURES

Predicting Noise in Complex Aircraft
Structures
LAR-13032 B83-10616 06

AIRFOIL PROFILES

Transonic Airfoil Analysis
ARC-11436 B83-10395 06

AIRFOILS

Two-Degree-of-Freedom Mount
System for Flutter Models
LAR-12950 B83-10062 06

Shock Free Airfoil Cascades
LEW-13842 B83-10076 06

Convection-Cooled Turbine Airfoils
MFS-25848 B83-10425 07

AIRLOCK MODULES

Airlock Entry
NPO-15415 B83-10720 08

ALCOHOLS

Low-Pressure Alcohol Distillation
MFS-25516 B83-10345 04

ALGORITHMS

Harmonic-Balance Algorithm for
Nonlinear Systems
MFS-25821 B83-10239 09

Modern Numerical Methods for
Classical Sampled System
GSC-12827 B83-10742 09

ALIGNMENT

Visual Alinement Technique for
Infrared LIDAR
NPO-15826 B83-10544 03

Positioning Vise for Crystal
Cleavage
GSC-12762 B83-10701 08

ALLOCATIONS

Deallocation Defective Space on
Winchester Disks
KSC-11287 B83-10534 02

ALLOYS

Directional Solidification of
Monotectic Alloys
MFS-25767 B83-10157 04

Directional Solidification of
Monotectic Alloys
MFS-25767 B83-10159 04

ALPHANUMERIC CHARACTERS

Microcomputer Multiplexes
Alphanumeric Labels on CRT's
MSC-20079 B83-10132 02

ALTIMETERS

Determining Aircraft Altitude
NPO-15386 B83-10402 06

ALUMINUM

Walnut Hulls Clean Aluminum
MFS-27012 B83-10344 04

ALUMINUM ALLOYS

Stress Corrosion Cracking of Certain
Aluminum Alloys
MFS-25773 B83-10160 04

ALUMINUM OXIDES

Packed Alumina Absorbs Hypergolic
Vapors
KSC-11278 B83-10569 04

AMORPHOUS MATERIALS

Fabrication of Structural Cellular
Glass
NPO-15731 B83-10223 08

Containerless Solidification of
Amorphous Metals
NPO-15776 B83-10570 04

AMPLIFICATION

Band-Pass Amplifier Without Discrete
Reactance Elements
GSC-12788 B83-10247 01

AMPLIFIER DESIGN

Band-Pass Amplifier Without Discrete
Reactance Elements
GSC-12788 B83-10247 01

AMPLIFIERS

High-Common-Mode-Rejection
ential Amplifier
MFS-25868 B83-10519 01

AMPLITUDE MODULATION

Demodulator for AM and SSB-SC
Signals
LAR-12716 B83-10509 01

ANALOG DATA

Pairwise Comparison of Voltage
Sets
LAR-12929 B83-10256 01

ANALOG TO DIGITAL CONVERTERS

Rounding Technique for High-Speed
Digital Signal Processing
NPO-15307 B83-10014 02

ANCHOIC CHAMBERS

Acoustic-Levitation Chamber
NPO-16142 B83-10726 08

ANGULAR VELOCITY

Circuitry for Angle Measurements
MFS-25825 B83-10137 02

ANISOTROPIC MEDIA

Determining the Orientation of
Anisotropic Materials
MSC-20229 B83-10054 06

ANNEALING

Annealing Solar Cells With Lasers
NPO-15694 B83-10120 08

ANTENNA ARRAYS

Receiver for Antenna Arrays
NPO-15089 B83-10015 02

Virtual-Center Antenna-Arraying
System
NPO-15874 B83-10273 02

Phased-Antenna-Array Conical
Scanning
NPO-15899 B83-10274 02

Radio-Frequency and Wideband
Modulation Arraying
NPO-15030 B83-10283 02

Sideband-Aided Receiver Arrays
NPO-15873 B83-10522 02

Automatic Phasing for Active
Antenna Elements
NPO-15920 B83-10524 02

ANTENNA DESIGN

Estimating Waveguide Feed
Directivity and Spacing
NPO-15603 B83-10144 03

Virtual-Center Antenna-Arraying
System
NPO-15874 B83-10273 02

Stripline Antenna Beam-Forming
Network
NPO-15743 B83-10503 01

ANTENNAS

Estimating Waveguide Feed
Directivity and Spacing
NPO-15603 B83-10144 03

Antenna for Imaging Sea Ice
NPO-15352 B83-10271 01

Self-Righting Objects
NPO-15023 B83-10399 06

Detecting Deformations in
Phased-Array Antennas
NPO-15390 B83-10523 02

ANTIFREEZES

Gelled Anti-icing Agents
MSC-20088 B83-10036 04

Modified Antifreeze Liquids for Use
on Surfaces
MFS-25741 B83-10043 04

ANTIFRICTION BEARINGS

Passive Magnetic Bearing
GSC-12726 B83-10085 07

ANTIICING ADDITIVES

Gelled Anti-icing Agents
MSC-20088 B83-10036 04

SUBJECT INDEX

Modified Antifreeze Liquids for Use
on Surfaces
MFS-25741 B83-10043 04

ANTIREFLECTION COATINGS
Silicon Nitride Antireflection Coatings
for Photovoltaic Cells
ARC-11447 B83-10332 04

APPROXIMATION
Harmonic-Balance Algorithm for
Nonlinear Systems
MFS-25821 B83-10239 09
Obtaining Runge-Kutta Solutions
Between Time Steps
MSC-20404 B83-10489 09

ARC WELDING
Coil Welding Aid
MSC-20470 B83-10088 07

ARRAYS
Hiding Solar-Array Bus Bars
NPO-15755 B83-10126 01

ARTERIOSCLEROSIS
Speculation on Ultrasonic
Disintegration of Arterial Deposits
MFS-25161 B83-10600 05

ASBESTOS
Calcium Free Asbestos for Fuel
Cells
MSC-20207 B83-10154 04

ASSEMBLING
Preparing Solar Cells for Soldering
NPO-15626 B83-10218 08
A One-Hand Nut and Bolt Assembly
Tool
MFS-19691 B83-10677 07

ASSURANCE
Quality-Planning-Requirements
ments
MSC-20280 B83-10233 08

ATMOSPHERIC MODELS
Simulating Atmospheric Turbulence
MFS-25850 B83-10377 06

ATMOSPHERIC MOISTURE
Crystal Microbalance Monitors
Relative Humidity
NPO-15493 B83-10388 06

ATMOSPHERIC TURBULENCE
Searching for Clear-Air Turbulence
NPO-15351 B83-10016 02
Simulating Atmospheric Turbulence
MFS-25850 B83-10377 06

ATTITUDE CONTROL
Attitude Control by Localized
Outgassing
NPO-15575 B83-10113 08
General Maneuver Program
GSC-12802 B83-10630 06

AUTOMATIC CONTROL
Improving Control of Remote
Manipulators
NPO-15049 B83-10018 02
Automatic Control of Multimedia
Shows
KSC-11080 B83-10286 02
Electronically-Scanned Pressure
Sensors
ARC-11361 B83-10387 06
Starting Silicon-Ribbon Growth
Automatically
NPO-15919 B83-10458 08

AUTOMATIC TEST EQUIPMENT
Probe Array for Testing
Printed-Circuit Substrates
GSC-12759 B83-10059 06
Automated Coliform Analysis
ARC-11322 B83-10368 05

Finding Open Faults In CMOS
Circuits
NPO-15838 B83-10504 01

AUTOMATION
Automated Mercury Dilatometer
NPO-14884 B83-10604 06

AUTOMOBILE ENGINES
Equations for
Automotive-Transmission Performance
NPO-15825 B83-10410 07

AXIAL FLOW TURBINES
Fast Generation of
Boundary-Conforming O-Type Grids
LEW-13818 B83-10081 06
Off-Design Turbine Modeling
LEW-13674 B83-10195 06

AXISYMMETRIC BODIES
Fast Generation of
Boundary-Conforming O-Type Grids
LEW-13818 B83-10081 06

AXISYMMETRIC FLOW
Boundary-Layer Equations for
Two-Dimensional and Axisymmetric
Flow
LAR-13015 B83-10080 06

B

BACTERIA
Flowthrough Bacteria-Detection
System
LAR-12871 B83-10164 05
Automated Coliform Analysis
ARC-11322 B83-10368 05

BAGS
Better Seals for Vacuum Bags
MFS-25875 B83-10216 08

BAND STRUCTURE OF SOLIDS
Multiple-Band-Gap Solar-Cell
Concept
MFS-25724 B83-10517 01

BANDWIDTH
Receiver for Antenna Arrays
NPO-15089 B83-10015 02

BARRIER LAYERS
Schottky-Barrier Photocell With
Intermediate Metal Layer
GSC-12816 B83-10501 01

BARRIERS
Barrier Self for Hydraulic Actuators
MSC-20390 B83-10655 06

BATTERY CHARGERS
Charge Efficiency Tests of Lead/Acid
Batteries
NPO-15869 B83-10281 02

BEAM INJECTION
Ion Accelerator Merges Several
Beams
NPO-15547 B83-10540 03

BEAM SPLITTERS
Beam Splitter Introduces Little
Aberration
NPO-15580 B83-10028 03
Imaging Fluid Flow
MFS-25897 B83-10543 03
Laser-Beam Separator
NPO-15723 B83-10557 03

BEARINGS
Passive Magnetic Bearing
GSC-12726 B83-10085 07
Tooling Converts Stock Bearings To
Custom Bearings
LAR-12922 B83-10090 07
Staked Bearing Removal Tool
MSC-20337 B83-10093 07

BOXES (CONTAINERS)

Portable Roller Staking Tool
MSC-20281 B83-10208 07
Testing Bearings in Tight Spaces
MSC-20250 B83-10210 07
Ball-and-Socket-Bearing Wear Test
MFS-19737 B83-10427 07
Bearing Wear in Large Thermal
Gradients
MFS-25879 B83-10428 07
Bearing Measuring Fixture
MFS-19315 B83-10442 07
Spherical-Bearing Analysis Program
LEW-13626 B83-10671 07

BELLOWS
Bellows With Longitudinal Beams
MFS-19633 B83-10713 08

BENDING
Bender/Coiler for Tubing
MSC-20410 B83-10206 07

BIMETALS
Burner-Injector-Post Tip
MFS-19827 B83-10683 07

BIOELECTRICITY
Microprocessor-Based
Wave Analyzer
ARC-11388 B83-10046 05

BIOMASS
Solvent Extraction of Furfural From
Biomass
NPO-15987 B83-10599 05

BISMUTH ALLOYS
Solidifying Bi/MnBi at Low Gravity
MFS-25736 B83-10044 04

BOLTS
Locking Bolt
MSC-20439 B83-10202 07

BONDING
Reducing the Resistance of
Conductive-Adhesive Bonds
MSC-20427 B83-10219 08
Liquid-Oxygen-Compatible Cement
for Gaskets
MFS-19797 B83-10466 08
Ultrasonic Bonding of Solar-Cell
Leads
NPO-16140 B83-10702 08
Pressure/Vacuum Bonding for
Low-Curvature Mirrors
NPO-15613 B83-10718 08

BOOLEAN ALGEBRA
Self-Checking Memory Interface
NPO-15889 B83-10521 02

BORING MACHINES
Tool for Guiding An Auger
MSC-20194 B83-10205 07
Mechanical Coal-Face Fracturer
NPO-15847 B83-10419 07
Continuous Mining Machine
NPO-15164 B83-10430 07

BOUNDARY LAYER EQUATIONS
Boundary-Layer Equations for
Two-Dimensional and Axisymmetric
Flow
LAR-13015 B83-10080 06

BOUNDARY LAYER FLOW
Measuring Surface-Shear Stress in a
Wind Tunnel
ARC-11384 B83-10180 06

BOUNDARY LAYER STABILITY
Compressible Stability Analysis Code
For Transition Prediction in Three
Dimensional Boundary Layers.
LAR-13042 B83-10188 06

BOXES (CONTAINERS)
Preserving Color in Developed
Photographic Film
MFS-23250 B83-10037 04

BRAGG ANGLE

Computation of Bragg Reflection for Layered Microstructures
NPO-15880 B83-10300 03

BRAZING

Holding Tubes in Place for Brazing
MFS-19658 B83-10211 07

BREADBOARD MODELS

Rapid Circuit Breadboarding
MFS-25761 B83-10470 08

BRIDGES (STRUCTURES)

Partial-Payload Support Structure
MFS-25485 B83-10647 06

BUBBLES

Imaging Bubble Formation In a Drop Tube
NPO-15114 B83-10324 03
Dissolving Bubbles in Glass
NPO-15105 B83-10347 04

BUDGETING

Conceptual Cost Estimating
KSC-11253 B83-10242 09

BUOYS

Safe Emergency Evacuation From Tall Structures
KSC-11225 B83-10643 06

BURNERS

Burner-Injector-Post Tip
MFS-19827 B83-10683 07

BUS CONDUCTORS

Hiding Solar-Array Bus Bars
NPO-15755 B83-10126 01
Connecting Separate Computers to a Common Bus
NPO-15433 B83-10289 02

BUSHINGS

Portable Roller Staking Tool
MSC-20281 B83-10208 07
Tool for Replacing Bushings
MSC-20282 B83-10209 07

C**CALCIUM**

Calcium Free Asbestos for Fuel Cells
MSC-20207 B83-10154 04

CALCULATORS

Solar-Cell Slide Rule
NPO-15646 B83-10106 08

CALIBRATING

Digital Phase-Shift Standard
KSC-11250 B83-10001 01
Electronic Force Gage for Welders
MFS-25798 B83-10172 06

CALORIMETERS

Gas-Temperature Measurement With Minimal Perturbation
MSC-20338 B83-10061 06

CAMBERED WINGS

Wing Subsonic Aerodynamic Performance Estimates
LAR-12987 B83-10079 06
Calculating the Vortex Lift Effect of Cambered Wings
LAR-12985 B83-10082 06

CAPTURE EFFECT

Electron Beam Could Probe Recombination Centers
NPO-15285 B83-10141 03

CARBON DIOXIDE

Discharge Extracts Oxygen From CO₂
ARC-11305 B83-10334 04

Removing Biostatic Agents From Fermentation Solutions
NPO-15806 B83-10370 05

CARBON FIBERS

Stronger Carbon Fibers for Reinforced Plastics
ARC-11261 B83-10035 04
Binder for Carbon-Fiber Coating
NPO-14988 B83-10579 04

CARBON-CARBON COMPOSITES

Eddy-Current Damage Test for Carbon Composites
MSC-20358 B83-10177 06

CARGO

Latch for Stored Cargo
MFS-25837 B83-10407 07

CARTS

Transporter for Treated Sheet Materials
MSC-20332 B83-10204 07

CASCADE FLOW

PANEL Code for Planar Cascades
LEW-13862 B83-10190 06

CASTING

High-Temperature, Low-Gravity Casting Furnace
MFS-25605 B83-10596 04

CASTINGS

Tool for Taking Clay Impressions
MFS-19728 B83-10435 07

CATALYSTS

Three-Zone Catalyst Resists Sulfur Poisoning
NPO-14827 B83-10356 04
Hydrogen Production From Heavy Fuels
NPO-14826 B83-10362 04
Catalytic Coal Liquefaction With Iron Sulfate
NPO-15727 B83-10589 04
Removing Sulfur Dioxide From Flue Gases
NPO-15758 B83-10593 04

CATHODE RAY TUBES

Microcomputer Multiplexes Alphanumeric Labels on CRT's
MSC-20079 B83-10132 02

CATHODES

Improved Hollow Cathode
NPO-15560 B83-10555 03

CATTLE

Improved Cattle Hauler
FRC-11058 B83-10020 03

CEMENTS

Epoxy Grout With Silica Thickener
NPO-15202 B83-10358 04
Liquid-Oxygen-Compatible Cement for Gaskets
MFS-19797 B83-10466 08

CERAMIC BONDING

Absorbable-Susceptor Welding of Ceramics
NPO-15640 B83-10217 08

CERAMIC COATINGS

Cryogenic Separation of a Ceramic From Its Mandrel
LAR-12904 B83-10717 08

CERAMICS

Absorbable-Susceptor Welding of Ceramics
NPO-15640 B83-10217 08
Ceramic Solar Receiver
NPO-15769 B83-10314 03
Ceramics for Solar Receivers
NPO-15763 B83-10351 04

CERENKOV RADIATION

Silicone Cerenkov-Radiator Material
GSC-12805 B83-10328 04

CHANNELS (DATA TRANSMISSION)

Linking 'Smart' Modules by a Single Channel
NPO-15342 B83-10134 02

CHARGE COUPLED DEVICES

Eliminating 'Hotspots' in Digital Image Processing
NPO-15684 B83-10527 02

CHARGE EFFICIENCY

Manometer Measures Gas Flow
NPO-15686 B83-10178 06
Charge Efficiency Tests of Lead/Acid Batteries
NPO-15869 B83-10281 02

CHARGED PARTICLES

Charged Particle Flux Sensor
MFS-25461 B83-10021 03

CHARRING

Charring, Nonmelting Epoxy Foams
MFS-25911 B83-10571 04

CHEMICAL ANALYSIS

Measuring Diffusion and Recombination Polycrystalline Silicon
ARC-11431 B83-10040 04

CHEMICAL ATTACK

Solvent-Resistant Polysulfones
LAR-12931 B83-10151 04

CHEMICAL COMPOSITION

Neutron Probe of Building-Wall Composition
GSC-12808 B83-10541 03

CHEMICAL LASERS

Fluorine Mixer/Vaporizer for Chemical Lasers
NPO-15552 B83-10311 03

CHIPS (ELECTRONICS)

VLSI Unit for Two-Dimensional Convolutions
NPO-15224 B83-10136 02

CHLORINATION

Desulfurizing Coal By Chlorinolysis and Hydrogenation
NPO-15304 B83-10034 04

CIRCUIT BOARDS

Probe Array for Testing Printed-Circuit Substrates
GSC-12759 B83-10059 06
Detecting Defective Solder Bonds
MFS-25507 B83-10260 01
Measuring Coating Thickness
MFS-25633 B83-10398 06

CIRCUIT BREAKERS

Solid-State dc Circuit Breaker
MFS-25172 B83-10005 01

CIRCUITS

Error-Compensated Integrate and Hold
ARC-11303 B83-10255 01
Improved High-Current Drive Circuit
NPO-14938 B83-10269 01

CLAMPS

Plastic Clamp Retains Clevis Pin
MFS-19747 B83-10207 07
Clamp for Attaching Equipment to an I-Beam
MFS-25510 B83-10429 07

CLEAN ROOMS

Improving Trace-Ion Sensitivity
MFS-25766 B83-10333 04

CLEANING

Robotic Water Blast Cleaner
MFS-25519 B83-10092 07

SUBJECT INDEX

COMPUTATIONAL FLUID DYNAMICS

Self-Cleaning Tubular-Membrane
Module
NPO-15245 B83-10100 07
Blowing Dust Away With Electrostatic
Wind
HQN-10936 B83-10261 01
Walnut Hulls Clean Aluminum
MFS-27012 B83-10344 04
CLEAR AIR TURBULENCE
Searching for Clear-Air Turbulence
NPO-15351 B83-10016 02
CLEAVAGE
Positioning Vise for Crystal
Cleavage
GSC-12762 B83-10701 08
CLIPS
Plastic Clamp Retains Clevis Pin
MFS-19747 B83-10207 07
CLOCKS
Estimating Effects of Flicker Noise in
Clock Signals
NPO-15525 B83-10537 02
CMOS
Finding Open Faults In CMOS
Circuits
NPO-15838 B83-10504 01
COAL
Desulfurizing Coal By Chlorinolysis
and Hydrogenation
NPO-15304 B83-10034 04
Instrumented Pick Detects
Coal/Rock Interface
MFS-25753 B83-10065 06
Supercritical-Multiple-Solvent
on From Coal
NPO-15767 B83-10153 04
Improved Coal-Thickness
Measurement
MFS-23721 B83-10284 02
Monitoring the Thickness of
Coal-Conversion Slag
NPO-15371 B83-10397 06
Automated Coal-Mine Shuttle Car
NPO-15850 B83-10417 07
Shuttle-Car System for Continuous
Mining
NPO-15949 B83-10418 07
Mechanical Coal-Face Fracturer
NPO-15847 B83-10419 07
Roof Support Near Coal-Mining
Face
NPO-15165 B83-10431 07
Bidirectional Continuous Coal Miner
NPO-15166 B83-10432 07
Miner for Cutting Entry Passages in
Coal Seams
NPO-15167 B83-10433 07
Vertical-Control Subsystem for
Automatic Coal Mining
MFS-25811 B83-10659 07
COAL GASIFICATION
Pressure Reducer for Coal Gasifiers
NPO-15100 B83-10084 07
Molten Slag Would Boost Coal
Conversion
NPO-15711 B83-10327 04
COAL LIQUEFACTION
Supercritical-Multiple-Solvent
on From Coal
NPO-15767 B83-10153 04
One-Step Coal Liquefaction
NPO-15891 B83-10326 04
Catalytic Coal Liquefaction With Iron
Sulfate
NPO-15727 B83-10589 04

COAL UTILIZATION
Supercritical-Multiple-Solvent
on From Coal
NPO-15767 B83-10153 04
COATING
Studies of the Inverted Meniscus
Deposition of Silicon on Ceramic
NPO-15602 B83-10234 08
Wicking Coating for Heat Pipes
NPO-15212 B83-10485 08
COATINGS
Forming Mirrors on Composite
Materials
NPO-15912 B83-10215 08
Silicone Cerenkov-Radiator Material
GSC-12805 B83-10328 04
Measuring Coating Thickness
MFS-25633 B83-10398 06
Two-Layer Glass Thermal-Control
Coating
ARC-11164 B83-10573 04
Conductive Plasma-Sprayed
Coatings
NPO-15927 B83-10595 04
CODERS
NRZ Data Asymmetry Corrector and
Convolutional Encoder
MSC-20187 B83-10133 02
CODING
Coding for Single-Line Transmission
KSC-11220 B83-10013 02
COLOR PHOTOGRAPHY
Preserving Color in Developed
Photographic Film
MFS-23250 B83-10037 04
COMBUSTION CHAMBERS
Electrodeposition Repair of Damaged
Metal Parts
MFS-19783 B83-10221 08
Ribbed Coolant Liners for
Combustion Chambers
MFS-19829 B83-10696 08
COMBUSTION EFFICIENCY
Acoustic Emissions Reveal
Combustion Conditions
NPO-15699 B83-10140 03
COMMUNICATION EQUIPMENT
Two-Wire to Four-Wire Audio
Converter
KSC-11256 B83-10003 01
COMMUTATION
Simplified High-Power Inverter
NPO-15961 B83-10499 01
COMPARATORS
Digital Control of Analog Detector
MFS-19608 B83-10514 01
COMPOSITE MATERIALS
Fire-Resistant Composites
ARC-11331 B83-10041 04
Curved Caps Raise Corrugation
Strength
LAR-12884 B83-10105 08
Low-Weight Inserts for Aluminum
Honeycomb Panels
MSC-20227 B83-10116 08
Solvent-Resistant Polysulfones
LAR-12931 B83-10151 04
Eddy-Current Damage Test for
Carbon Composites
MSC-20358 B83-10177 06
Forming Mirrors on Composite
Materials
NPO-15912 B83-10215 08
SixNyCz Fibers for Safer
Composites
MFS-25721 B83-10331 04

Elastomer-Modified Polyimides
ARC-11400 B83-10336 04
Predicting Moisture Absorption in
Composite Materials
MSC-20109 B83-10337 04
Improved Thermosetting Imide
Resins
ARC-11368 B83-10341 04
Attaching Strain Gages to Composite
Materials
MFS-25867 B83-10378 06
Panel Analysis and Sizing Code
LAR-13004 B83-10393 06
Predicting Thermal Conductivity
MFS-25732 B83-10400 06
Modified Oscillograph for Impacting
Composite Materials
MFS-25901 B83-10406 06
In Situ Composite Fastener
LAR-12939 B83-10463 08
Microyield Stress in Composite
Materials
MFS-25709 B83-10639 06
Forming Lightweight Beams From
Composite Tape
MFS-25880 B83-10694 08
COMPOSITE STRUCTURES
More-Uniform Heat Curing for
Structural Repairs
MSC-20101 B83-10114 08
Frame Allines Fibers in Multilayer
Composites
MFS-25959 B83-10706 08
COMPRESSIBLE BOUNDARY LAYER
Compressible Stability Analysis Code
For Transition Prediction in Three
Dimensional Boundary Layers
LAR-13042 B83-10188 06
COMPRESSIBLE FLOW
Compressible Flow About Wind
Turbine Blades
LEW-13740 B83-10103 07
Compressible Stability Analysis Code
For Transition Prediction in Three
Dimensional Boundary Layers
LAR-13042 B83-10188 06
Steady, Nonrotating, Blade-to-Blade
Potential Transonic Cascade Flow
Analysis Code
LEW-13854 B83-10189 06
COMPRESSION TESTS
J-Channel Locks Potting to
Compression Panel
LAR-12913 B83-10179 06
COMPRESSIVE STRENGTH
Curved Caps Raise Corrugation
Strength
LAR-12884 B83-10105 08
COMPRESSOR BLADES
Axial Compressor Design and
Analysis
LEW-13488 B83-10196 06
COMPRESSOR ROTORS
Analyzing Flow Fields in
Axial-Compressor Rotors and Stators
LEW-13910 B83-10629 06
COMPRESSORS
Low-Vibration Oscillating
Compressor
GSC-12799 B83-10658 07
COMPUTATION
Solutions of Transonic Flow in
Turbomachines
LEW-13896 B83-10186 06
COMPUTATIONAL FLUID DYNAMICS
PANEL Code for Planar Cascades
LEW-13862 B83-10190 06

COMPUTER AIDED DESIGN

- Design of Multistage Axial-Flow Compressors
 - LEW-13505 B83-10191 06
 - Extended Vortex Lattice Method
 - LAR-13039 B83-10192 06
 - Subcritical Wing Design Code
 - LAR-12959 B83-10193 06
 - Interactive Graphics Analysis for Aircraft Design
 - LAR-12951 B83-10194 06
 - Panel Analysis and Sizing Code
 - LAR-13004 B83-10393 06
 - Hidden-Line Computer Code
 - ARC-11446 B83-10491 09
 - Minimizing Weight of Structural Designs
 - LAR-13107 B83-10624 06

COMPUTER COMPONENTS

- Self-Checking Memory Interface
 - NPO-15889 B83-10521 02

COMPUTER GRAPHICS

- Subcritical Wing Design Code
 - LAR-12959 B83-10193 06
- QUICK Interactive Graphics Analysis
 - LAR-12952 B83-10394 06
- Hidden-Line Computer Code
 - ARC-11446 B83-10491 09

COMPUTER INFORMATION SECURITY

- Security Package for the VAX
 - MSC-20423 B83-10246 09

COMPUTER NETWORKS

- Connecting Separate Computers to a Common Bus
 - NPO-15433 B83-10289 02

COMPUTER PROGRAM INTEGRITY

- Security Package for the VAX
 - MSC-20423 B83-10246 09

COMPUTER PROGRAMS

- Large-Scale Software Management System
 - KSC-11230 B83-10122 09
- Software Specification Language
 - MFS-23737 B83-10244 09

COMPUTER STORAGE DEVICES

- Extending the Memory of Microcomputers
 - NPO-15295 B83-10282 02

COMPUTER SYSTEMS

- Measuring Software-Execution Time
 - KSC-11267 B83-10278 02

COMPUTER TECHNIQUES

- Sharp-Focus Composite Microscope Imaging by Computer
 - NPO-15207 B83-10167 05
- Improvements in Vibration-Analysis Technique
 - MFS-25919 B83-10621 06

COMPUTERIZED SIMULATION

- Random Life Curves for Common Engineering Materials
 - MSC-20433 B83-10163 04
- Transonic, Axisymmetric Flow Over Nozzle Afterbodies With Supersonic Jet Exhausts
 - LAR-12957 B83-10187 06
- Off-Design Turbine Modeling
 - LEW-13674 B83-10195 06
- Thermal Elastohydrodynamic Lubrication of Spur Gears
 - LEW-13528 B83-10213 07
- Thermal Modeling of Bridgman Crystal Growth
 - MFS-27003 B83-10237 08

- Crash Simulation and Nonlinear Structural Analysis
 - LAR-12926 B83-10392 06
- Training Simulator for Fire Management
 - MFS-25898 B83-10495 09

CONCENTRATORS

- Compact Concentrators for Solar Cells
 - MFS-25511 B83-10293 03
- Two-Stage Off-Axis Cylindrical Solar Concentrator
 - NPO-15484 B83-10295 03
- Glass for Solar Concentrators
 - NPO-14923 B83-10354 04

CONDUCTIVE HEAT TRANSFER

- Stability Test for Transient-Temperature Calculations
 - MFS-25803 B83-10381 06
- Predicting Thermal Conductivity
 - MFS-25732 B83-10400 06
- Low-Thermal-Resistance Baseplate Mounting
 - MFS-25908 B83-10613 06

CONDUCTORS

- Shielded Aluminum Flat-Conductor Cable
 - MFS-25899 B83-10250 01

CONFIDENCE LIMITS

- Determining Normal-Distribution Tolerance Bounds Graphically
 - MSC-20115 B83-10238 09

CONNECTORS

- Improved Connector Shell for Cable Shields
 - NPO-15584 B83-10006 01
- Self-Alining Quick-Connect Joint
 - LAR-12711 B83-10094 07
- Self-Locking Connector
 - MFS-19716 B83-10095 07
- Latching Mechanism for Umbilical Connectors
 - MSC-20242 B83-10096 07
- Reusable High-Pressure Connector
 - MSC-20339 B83-10097 07
- Self-Locating Latch
 - MFS-25956 B83-10446 07

CONSTRUCTION

- Erectable Space-Construction Fixture
 - MSC-20259 B83-10469 08
- Bellows With Longitudinal Beams
 - MFS-19633 B83-10713 08

CONSTRUCTION INDUSTRY

- Waterproof Raised Floor Makes Utility Lines Accessible
 - ARC-11363 B83-10605 06

CONTAINERLESS MELTS

- Acoustical-Levitation Chamber for Metallurgy
 - NPO-15453 B83-10117 08
- Acoustic Levitation With Less Equipment
 - NPO-15562 B83-10118 08
- Phase Modulation Varies Average Acoustic Torque
 - NPO-15689 B83-10227 08
- Hollow-Sphere Production Line
 - NPO-15592 B83-10230 08
- Interstitial Collimating Holes for Gas-Levitation Microfurnace
 - MFS-25829 B83-10460 08
- Off-Resonance Acoustic Levitation Without Rotation
 - NPO-15634 B83-10461 08

- Quenching Alloys in Containerless Processing
 - MFS-25305 B83-10478 08
- Containerless-Processing Module
 - NPO-14932 B83-10479 08
- Containerless Solidification of Amorphous Metals
 - NPO-15776 B83-10570 04
- Containerless Processing of Advanced Glasses
 - MFS-27002 B83-10581 04

CONTAINMENT

- Interstitial Collimating Holes for Gas-Levitation Microfurnace
 - MFS-25829 B83-10460 08
- Sonic-Pump Levitator
 - MFS-25828 B83-10462 08

CONTAMINANTS

- Dye Indicators for Acidic or Basic Surface Contamination
 - MFS-19387 B83-10580 04

CONTAMINATION

- Effects of Outdoor Soiling on Photovoltaic Modules
 - NPO-15186 B83-10317 03
- Improving Trace-Ion Sensitivity
 - MFS-25766 B83-10333 04
- Low-Contamination Vibrating Feeder for Silicon Chips
 - NPO-15128 B83-10445 07

CONTINUITY

- Continuity/Isolation Checker
 - NPO-15632 B83-10518 01

CONTINUOUS WAVE LASERS

- Obtaining Pulses From a CW Laser
 - NPO-15111 B83-10309 03

CONTOUR SENSORS

- Checking Surface Contours
 - MSC-20318 B83-10052 06

CONTOURS

- Checking Surface Contours
 - MSC-20318 B83-10052 06
- Algorithm for Constructing Contour Plots
 - ARC-11441 B83-10490 09
- Fitting Flexible Coverings to Contoured Surfaces
 - MSC-20503 B83-10691 08

CONTRACTORS

- Quality-Planning-Requirements ments
 - MSC-20280 B83-10233 08

CONTROL

- Phase Modulation Stops Levitated Sample Rotation
 - NPO-16002 B83-10707 08
- Modern Numerical Methods for Classical Sampled System Analysis-SAMSAN
 - GSC-12827 B83-10742 09

CONTROL EQUIPMENT

- Displaying Force and Torque of A Manipulator
 - NPO-15942 B83-10529 02

CONTROL SIMULATION

- Electric-Power System Simulator
 - NPO-15515 B83-10288 02

CONTROL UNITS (COMPUTERS)

- Digital Control of Analog Detector
 - MFS-19608 B83-10514 01

CONTROL VALVES

- Discriminating Between Liquid and Gas Flows
 - NPO-15531 B83-10050 06
- Jet Engines as High-Capacity Vacuum Pumps
 - MFS-25791 B83-10199 07

SUBJECT INDEX

Remotely-Adjustable
of Valve
NPO-15693 B83-10404 06

CONTROLLERS
Digital Single-Phase Power-Factor
Controller
MFS-25861 B83-10125 01

COOLANTS
Liquid-Droplet Radiative Cooler
MFS-25890 B83-10602 06

COOLING
Cooling by Para-to-Ortho-Hydrogen
Conversion
GSC-12770 B83-10024 03
Metering Baffle for Turbine-Blade
Cooling
MFS-25849 B83-10424 07
Convection-Cooled Turbine Airfoils
MFS-25848 B83-10425 07
Cooldown Strategy for Cryogenic
Wind Tunnels
LAR-13012 B83-10617 06

COOLING SYSTEMS
Electrodeposition Repair of Damaged
Metal Parts
MFS-19783 B83-10221 08
Cooling Waveguide Flanges in
Microwave Transmitters
NPO-15401 B83-10264 01
Ionic Refrigerator
NPO-15288 B83-10320 03
Variable-Conductance Heat-Transfer
Module
GSC-12771 B83-10408 07

COPPER
Electroformed Electrodes for
Electrical-Discharge Machining
MFS-19651 B83-10715 08

CORRECTION
Removing Images From Microfilm
NPO-15146 B83-10353 04

CORRELATION
Calculating Static-Seal Leakage
Correlation
MFS-19674 B83-10175 06
Autocovariance Computer
LAR-12968 B83-10615 06

CORROSION
Rhenium Prevents Corrosion
NPO-15011 B83-10361 04

CORROSION PREVENTION
Ice as an Abrading Agent
MFS-19837 B83-10693 08

CORROSION RESISTANCE
Oxidation Protection for
Thermocouples
NPO-15605 B83-10710 08

CORROSION TESTS
Etchants for Some
Corrosion-Resistant Metals
MFS-25467 B83-10586 04

CORRUGATED PLATES
Curved Caps Raise Corrugation
Strength
LAR-12884 B83-10105 08

COSMIC RAYS
The Effect of Cosmic Rays on MSI
Devices
NPO-15779 B83-10263 01

COST ANALYSIS
KSC Construction Cost Index
KSC-11252 B83-10241 09

COST EFFECTIVENESS
Cost Effectiveness of Hybrid Solar
Powerplants
NPO-15735 B83-10149 03

COST ESTIMATES
KSC Construction Cost Index
KSC-11252 B83-10241 09
Conceptual Cost Estimating
KSC-11253 B83-10242 09

COST REDUCTION
Planning Transport and
Manufacturing for Lowest Cost
NPO-15391 B83-10123 09
Radar Cuts Subsoil Survey Costs
KSC-11227 B83-10276 02
Handling Fixture for Solar-Cell
Arrays
NPO-15908 B83-10450 08
Shield Boosts Silicon-Growth Rate
NPO-16049 B83-10475 08
Low-Cost GaAs Solar Cells
NPO-14914 B83-10476 08

COSTS
KSC Construction Cost Index
KSC-11252 B83-10241 09
Conceptual Cost Estimating
KSC-11253 B83-10242 09

COUPLERS
Flexible Coupling for Angle
Transducer
NPO-15412 B83-10064 06

COUPLING
Optical-Fiber-to-Channel-Waveguide
Coupler
NPO-15555 B83-10029 03
Polymer Bonding of Optical Fibers
NPO-15464 B83-10224 08

COUPLINGS
Self-Locking Connector
MFS-19716 B83-10095 07
Clamp for Attaching Equipment to an
I-Beam
MFS-25510 B83-10429 07

COVERALLS
Adhesive Removal From Protective
Clothing
KSC-11017 B83-10482 08

COVERINGS
Fitting Flexible Coverings to
Contoured Surfaces
MSC-20503 B83-10691 08

CRACK INITIATION
Microfissuring in Alloys During
Welding
MFS-25604 B83-10725 08

CRACKING (FRACTURING)
Stress Corrosion Cracking of Certain
Aluminum Alloys
MFS-25773 B83-10160 04
Cracks in Glass Polymers Induced by
Solvent Absorption
NPO-15072 B83-10161 04
Microfissuring in Nickel-Based-Alloy
Welds
MFS-25815 B83-10340 04
Hot Microfissuring in Nickel Alloy
MFS-25763 B83-10587 04
Additional Heat Treatment for
Silica-Fiber Insulation
MSC-20600 B83-10588 04

CRACKS
Measuring Small Leak Holes
MSC-20113 B83-10063 06

CRASHES
Crash Simulation and Nonlinear
Structural Analysis
LAR-12926 B83-10392 06

CROSSLINKING
Measuring Epoxy-Curing Kinetics
NPO-15710 B83-10152 04

CRYSTAL GROWTH

In Situ Cross-Linking of Polyvinyl
Alcohol Films
LEW-13135 B83-10578 04

CRUCIBLES
Gas-Bearing Crucible for Shot
Tower
NPO-15070 B83-10229 08
Oscillating-Crucible Technique for
Silicon Growth
NPO-15938 B83-10455 08

CRYOGENIC COOLING
Passive Module for Cryogenic
Refrigeration
ARC-11263 B83-10401 06
Cryogenic Separation of a Ceramic
From Its Mandrel
LAR-12904 B83-10717 08

CRYOGENIC EQUIPMENT
Motorized Cryogenic Valve
ARC-11452 B83-10687 07

CRYOGENIC FLUID STORAGE
Continuous-Reading Cryogen Level
Sensor
MFS-25873 B83-10611 06

CRYOGENIC FLUIDS
Level Sensor for Cryogenic Fluids
MSC-20302 B83-10009 01
Leak Tester for Cryogenic Flowlines
MSC-20233 B83-10174 06
Cryogenic Pressure Seal for Wires
MFS-19668 B83-10376 06

CRYOGENIC WIND TUNNELS
Cooldown Strategy for Cryogenic
Wind Tunnels
LAR-13012 B83-10617 06

CRYOPUMPING
Cryogenic Vacuum Pump
NPO-15517 B83-10198 07

CRYSTAL GROWTH
Solar-Cell Slide Rule
NPO-15646 B83-10106 08
Gas-Jet Meniscus Control in Ribbon
Growth
NPO-14978 B83-10112 08
Pressure-Reduction Technique for
Crystal Growth
NPO-15772 B83-10226 08
Thermal Modeling of Bridgman
Crystal Growth
MFS-27003 B83-10237 08
Oscillating-Crucible Technique for
Silicon Growth
NPO-15938 B83-10455 08
Improved Radiative Control of Ribbon
Growth
NPO-15916 B83-10456 08
Growing Single-Crystal Sheets by
Controlled Cooling
NPO-15800 B83-10459 08
Growing Crystals for Infrared
Detectors
MFS-25786 B83-10465 08
Interface Instability During Crystal
Growth
MFS-25841 B83-10468 08
Improved Silicon-Growth Chamber
NPO-15237 B83-10471 08
Growing Single Crystals From
Low-Purity Silicon
NPO-15538 B83-10472 08
Proposed Technique of
Crystal-Ribbon Growth
NPO-15629 B83-10474 08
Shield Boosts Silicon-Growth Rate
NPO-16049 B83-10475 08

Purifying Silicon During Crystal Growth
NPO-14831 B83-10730 08
Silicon-Film Growth by Continuous Edge-Supported Melt Skimming
NPO-15532 B83-10731 08

CRYSTAL OSCILLATORS

Stabilizing Crystal Oscillators With Melting Metals
NPO-15641 B83-10257 01
Central Control of Local Oscillator Frequencies
GSC-12804 B83-10533 02

CRYSTALLIZATION

Pressure-Reduction Technique for Crystal Growth
NPO-15772 B83-10226 08

CRYSTALS

Pressure-Reduction Technique for Crystal Growth
NPO-15772 B83-10226 08
Thermal Modeling of Bridgman Crystal Growth
MFS-27003 B83-10237 08

CUMULATIVE DAMAGE

Estimating the Lifetimes of Nickel/Cadmium Cells
NPO-15145 B83-10576 04

CURING

More-Uniform Heat Curing for Structural Repairs
MSC-20101 B83-10114 08
Measuring Epoxy-Curing Kinetics
NPO-15710 B83-10152 04

CURVED PANELS

Adjusting the Contour of Reflector Panels
NPO-15319 B83-10721 08

CUTTERS

Continuous Mining Machine
NPO-15164 B83-10430 07

CZOCHEVALSKI METHOD

Growing Single-Crystal Sheets by Controlled Cooling
NPO-15800 B83-10459 08

D**DAMAGE ASSESSMENT**

Eddy-Current Damage Test for Carbon Composites
MSC-20358 B83-10177 06

DATA ACQUISITION

Dual-Rate Transmission Reduces Weather Effects
NPO-15807 B83-10280 02

DATA BASE MANAGEMENT SYSTEMS

SPIRE Data-Base Management System
GSC-12684 B83-10737 09
Software Document Inventory Program
GSC-12803 B83-10739 09

DATA CONVERSION ROUTINES

Algorithm for Constructing Contour Plots
ARC-11441 B83-10490 09

DATA LINKS

Linking 'Smart' Modules by a Single Channel
NPO-15342 B83-10134 02
Telemetry Speeds Forest-Fire Control
ARC-11438 B83-10279 02

DATA MANAGEMENT

Large-Scale Software Management System
KSC-11230 B83-10122 09
Research and Development Mission Analysis System
GSC-12847 B83-10741 09

DATA PROCESSING

Digital Filters for Two-Dimensional Data
MFS-25790 B83-10240 09

DATA RECORDERS

Portable Data Logger for Photovoltaic Panels
NPO-15158 B83-10139 02

DATA SAMPLING

Modern Numerical Methods for Classical Sampled System Analysis-SAMSAN
GSC-12827 B83-10742 09

DATA SMOOTHING

Digital Filters for Two-Dimensional Data
MFS-25790 B83-10240 09

DATA SYSTEMS

NAMLIST Preprocessor Program
GSC-12711 B83-10740 09

DATA TRANSMISSION

Coding for Single-Line Transmission
KSC-11220 B83-10013 02
NRZ Data Asymmetry Corrector and Convolutional Encoder
MSC-20187 B83-10133 02
Linking 'Smart' Modules by a Single Channel
NPO-15342 B83-10134 02
Dual-Rate Transmission Reduces Weather Effects
NPO-15807 B83-10280 02

DATUM (ELEVATION)

Algorithm for Constructing Contour Plots
ARC-11441 B83-10490 09

DECELERATION

Preventing Motor Damage Due to Rapid Reversal
MFS-19702 B83-10676 07

DEFORMATION

Detecting Deformations in Phased-Array Antennas
NPO-15390 B83-10523 02

DEGASSING

Packed Alumina Absorbs Hypergolic Vapors
KSC-11278 B83-10569 04

DEICERS

Gelled Anti-icing Agents
MSC-20088 B83-10036 04
Modified Antifreeze Liquids for Use on Surfaces
MFS-25741 B83-10043 04

DELAY CIRCUITS

Solid-State dc Circuit Breaker
MFS-25172 B83-10005 01

DEMINERALIZING

Calcium Free Asbestos for Fuel Cells
MSC-20207 B83-10154 04

DEMODULATORS

Demodulator for AM and SSB-SC Signals
LAR-12716 B83-10509 01

DEMULPLEXING

Grating Demultiplexers for Optical Signals
LAR-12748 AND LAR-12749 B83-10147 03

DEPOSITION

Studies of the Inverted Meniscus Deposition of Silicon on Ceramic
NPO-15602 B83-10234 08

DEPTH MEASUREMENT

Depth Gage for Threaded Holes
MFS-19884 B83-10672 07

DESALINIZATION

High-Flow Asymmetric Reverse-Osmosis Membranes
ARC-11359 B83-10598 05

DESIGN ANALYSIS

Design of Multistage Axial-Flow Compressors
LEW-13505 B83-10191 06
Axial Compressor Design and Analysis
LEW-13488 B83-10196 06
General Aviation Synthesis Program
ARC-11434 B83-10396 06
Radiation-Hardness Data For Semiconductor Devices
NPO-15787 B83-10507 01
Optimizing Grid Patterns on Photovoltaic Cells
NPO-15841 B83-10709 08

DESULFURIZING

Desulfurizing Coal By Chlorinolysis and Hydrogenation
NPO-15304 B83-10034 04

DETECTION

Detection of Floating Inputs in Logic Circuits
LAR-13073 B83-10528 02

DEVIATION

Predicting Solar Deficits
NPO-15667 B83-10561 03

DEW

Rain and Dew Detector
NPO-15370 B83-10405 06

DIABETES MELLITUS

Computer Analysis of Eye Blood-Vessel Images
NPO-15527 B83-10371 05

DIAGNOSIS

Microprocessor-Based Wave Analyzer
ARC-11388 B83-10046 05
Computer Analysis of Eye Blood-Vessel Images
NPO-15527 B83-10371 05

DIAGRAMS

Information-Systems Data-Flow Diagram
NPO-15492 B83-10121 09

DIELECTRIC PROPERTIES

Dielectric Scanning Locates Voids in Glass Foam
NPO-15728 B83-10176 06

DIESEL ENGINES

Diesel Particulate Destruction
NPO-15426 B83-10346 04
Reducing Soot in Diesel Exhaust
NPO-15715 B83-10355 04

DIFFERENTIAL AMPLIFIERS

High-Common-Mode-Rejection Differential Amplifier
MFS-25868 B83-10519 01

DIFFERENTIAL PRESSURE

Jet Engines as High-Capacity Vacuum Pumps
MFS-25791 B83-10199 07

DIFFRACTION

Efficiency of Reflection Gratings
NPO-15852 B83-10567 03

DIFFUSION

Measuring Diffusion and
Recombination in Polycrystalline
Silicon
NPO-15601 B83-10039 04

DIFFUSION PUMPS

Stalled-Flow and Head-Loss Model
for Diffuser Pumps
MFS-19748 B83-10673 07

DIGITAL FILTERS

Digital Filters for Two-Dimensional
Data
MFS-25790 B83-10240 09
Interstitia Digital-Image-Point
Generator
MFS-25871 B83-10525 02

DIGITAL TECHNIQUES

NRZ Data Asymmetry Corrector and
Convolutional Encoder
MSC-20187 B83-10133 02

DIGITAL TO ANALOG CONVERTERS

Digital Control of Analog Detector
MFS-19608 B83-10514 01

DILATOMETRY

Electronic Dilatometer
GSC-12738 B83-10168 06

DIODES

Electrolytic Sharpening of
Diode-Contact Whiskers
NPO-15789 B83-10222 08
Low-Noise Submillimeter-Wave
Diode
NPO-15935 B83-10498 01

DIPLEXERS

Directional Coupler With Increased
Directivity
NPO-15892 B83-10252 01

DIRECT CURRENT

Solid-State dc Circuit Breaker
MFS-25172 B83-10005 01

DIRECT POWER GENERATORS

Printed Circuit Converts RF Energy
to dc Power
LEW-13913 B83-10002 01
Developing Standards for
Photovoltaic Devices
NPO-15734 B83-10130 01

DIRECTIONAL SOLIDIFICATION

(CRYSTALS)

Growing Crystals for Infrared
Detectors
MFS-25786 B83-10465 08

DISPENSERS

Dispensing Small Measured Volumes
of Liquid
MFS-25690 B83-10056 06

DISPLACEMENT MEASUREMENT

Flexible Coupling for Angle
Transducer
NPO-15412 B83-10064 06

DISPLAY DEVICES

Microcomputer Multiplexes
Alphanumeric Labels on CRT's
MSC-20079 B83-10132 02
Hidden-Line Computer Code
ARC-11446 B83-10491 09
Displaying Force and Torque of A
Manipulator
NPO-15942 B83-10529 02

DISSOCIATION

Improved Coil for Hydrogen
Dissociators
MFS-25638 B83-10262 01

DISTANCE

Focal-Plane-Array Optical Proximity
Sensors
NPO-15155 B83-10017 01

DISTANCE MEASURING EQUIPMENT

Self-Modulated Laser Rangefinder
GSC-12761 B83-10142 03

DISTILLATION

Low-Pressure Alcohol Distillation
MFS-25516 B83-10345 04

DOCUMENT STORAGE

A File Archival System
NPO-16274 B83-10735 09

DOCUMENTATION

Software Document Inventory
Program
GSC-12803 B83-10739 09

DOORS

Spool-Valve Pressure-Difference
Regulator
MSC-20127 B83-10200 07
Retractable Rotating Door Latch
MSC-20304 B83-10201 07

DRAG REDUCTION

Minimum Induced Drag of Nonplanar
Wings
LAR-12925 B83-10078 06

DRILL BITS

Mechanical Coal-Face Fracturer
NPO-15847 B83-10419 07

DRILLING

Drilling Precise Orifices and Slots
MSC-20053 B83-10091 07

DRILLS

Tool for Guiding An Auger
MSC-20194 B83-10205 07
Tool Enlarges Hard-to-Reach Holes
MFS-19789 B83-10413 07

DROP SIZE

Ultrasonics and Optics Would Control
Shot Size
NPO-15608 B83-10107 08

DRYING

Drying Milk With Boiler Exhaust
NPO-15923 B83-10297 03
Dewatering Peat With Activated
Carbon
NPO-15113 B83-10365 04

DUCTED FLOW

Wind Turbine With Concentric Ducts
KSC-11191 B83-10086 07

DYES

Dye Indicators for Acidic or Basic
Surface Contamination
MFS-19387 B83-10580 04

DYNAMIC LOADS

Methods for Estimating
Payload/Vehicle Design Loads
NPO-15550 B83-10184 06

DYNAMIC STRUCTURAL ANALYSIS

Accuracy Criterion for Structural
Calculations
NPO-16008 B83-10634 06

DYNAMOMETERS

Test-Bench Dynamometer
NPO-15084 B83-10441 07

E

ECCENTRICITY

Theory for Eccentric and Misaligned
Annular Seals
MFS-19892 B83-10652 06

ECONOMIC DEVELOPMENT

Solar-Cell-Manufacturing System
MFS-25483 B83-10728 08

EDDY CURRENTS

Eddy-Current Damage Test for
Carbon Composites
MSC-20358 B83-10177 06
Paint-Thickness Checker
KSC-11270 B83-10520 01

EGRESS

Safe Emergency Evacuation From
Tall Structures
KSC-11225 B83-10643 06

EJECTORS

Retention Mechanism for Spinning
Objects
MFS-25957 B83-10674 07

ELASTODYNAMICS

Mathematical Instability Criteria for
Elastic Structures
NPO-15090 B83-10620 06

ELASTOHYDRODYNAMICS

Thermal Elastohydrodynamic
Lubrication of Spur Gears
LEW-13528 B83-10213 07
Designing More-Efficient Spur Gears
LEW-13921 B83-10662 07

ELASTOMERS

Perfluoroalkylene-Ether Triazine
Elastomers
ARC-11402 B83-10335 04

ELECTRIC BATTERIES

Measuring Power Flow in Electric
Vehicles
NPO-15514 B83-10138 02
'Fuel Gage' for Electric Vehicles
NPO-15759 B83-10277 02
Charge Efficiency Tests of Lead/Acid
Batteries
NPO-15869 B83-10281 02
Estimating the Solubility of Gases in
Battery Electrolytes
NPO-15610 B83-10321 03

ELECTRIC COILS

Improved Coil for Hydrogen
Dissociators
MFS-25638 B83-10262 01

ELECTRIC CONNECTORS

Improved Connector Shell for Cable
Shields
NPO-15584 B83-10006 01
Conical Electrical Connectors Aline
Easily
MFS-25211 B83-10251 01
Shielding Electric Connectors From
Lightning
NPO-15688 B83-10511 01
Installation/Removal Tool for
Screw-Mounted Components
MSC-20606 B83-10667 07

ELECTRIC CONTACTS

Electrolytic Sharpening of
Diode-Contact Whiskers
NPO-15789 B83-10222 08
Conical Electrical Connectors Aline
Easily
MFS-25211 B83-10251 01
Ti/Pd/Cu Contacts for
Semiconductor Devices
NPO-15043 B83-10268 01

ELECTRIC EQUIPMENT TESTS

Digital Soldering-Iron Tester
MFS-25863 B83-10254 01
Transformer and Meter Tester
MFS-19708 B83-10681 07

ELECTRIC FIELDS

Electrostatic Levitator With Feedback
Control
NPO-15553 B83-10228 08

Blowing Dust Away With Electrostatic
Wind
HQN-10936 B83-10261 01
Improved Electrostatic Optical
System
NPO-15774 B83-10302 03

ELECTRIC GENERATORS

Solar-Pond Resources in the United
States
NPO-15681 B83-10150 03

ELECTRIC HYBRID VEHICLES

Test-Bench Dynamometer
NPO-15084 B83-10441 07

ELECTRIC MOTOR VEHICLES

Measuring Power Flow in Electric
Vehicles
NPO-15514 B83-10138 02

'Fuel Gage' for Electric Vehicles
NPO-15759 B83-10277 02
Pulse Response Yields Battery
Charge State
NPO-14882 B83-10285 02

Air-Conditioning for Electric Vehicles
NPO-15183 B83-10549 03

ELECTRIC MOTORS

Digital Single-Phase Power-Factor
Controller
MFS-25861 B83-10125 01

Phase Detector for Power-Factor
Controller
MFS-25854 B83-10248 01

Power-Factor Controller With Fast
Load Response
MFS-25852 B83-10249 01

Reciprocating Linear Electric Motor
GSC-12773 B83-10421 07
Controlling An Inverter-Driven
Three-Phase Motor
MFS-25215 B83-10510 01

ELECTRIC POTENTIAL

Determining the Point of Zero Zeta
Potential in Solid Samples
LAR-12893 B83-10026 03

ELECTRIC POWER PLANTS

Electric-Power System Simulator
NPO-15515 B83-10288 02

ELECTRIC POWER SUPPLIES

Programable Power Conditioner
MFS-25531 B83-10270 01

ELECTRIC TERMINALS

Conical Electrical Connectors Aline
Easily
MFS-25211 B83-10251 01

Terminal System for Photovoltaic
Arrays
NPO-15739 B83-10733 08

ELECTRIC WELDING

Electronic Force Gage for Welders
MFS-25798 B83-10172 06

ELECTRICAL FAULTS

Test Pattern for IC's
NPO-15648 B83-10232 08
Finding Open Faults In CMOS
Circuits
NPO-15838 B83-10504 01

ELECTRICAL INSULATION

Add-On Shielding for Unshielded
Wire
NPO-15107 B83-10007 01

Repairing Damaged Power-Cable
Insulation
KSC-11206 B83-10464 08

ELECTRICAL RESISTANCE

Reducing the Resistance of
Conductive-Adhesive Bonds
MSC-20427 B83-10219 08

ELECTRICAL RESISTIVITY

Predicting Singered-Metal Resistivity
From Porosity
NPO-15587 B83-10158 04

Improving Trace-Ion Sensitivity
MFS-25766 B83-10333 04
Continuity/Isolation Checker
NPO-15632 B83-10518 01

Making SixNyCz Fibers by Pyrolysis
MFS-25621 B83-10585 04

ELECTROCHEMICAL CELLS

Determining the Point of Zero Zeta
Potential in Solid Samples
LAR-12893 B83-10026 03

ELECTROCHEMICAL MACHINING

Electrochemical Deburring
MFS-19693 B83-10087 07

ELECTRODEPOSITION

Electrodeposition Repair of Damaged
Metal Parts
MFS-19783 B83-10221 08

Repairing Defective Welds
MFS-19618 B83-10484 08

ELECTRODES

Sialon Electrodes and Insulators for
MHD Device
NPO-14945 B83-10352 04

Electroformed Electrodes for
Electrical-Discharge Machining
MFS-19651 B83-10715 08

ELECTROLESS DEPOSITION

Plated Metal Powders for Electrode
Pastes
NPO-15161 B83-10360 04

ELECTROLYTES

Estimating the Solubility of Gases in
Battery Electrolytes
NPO-15610 B83-10321 03

ELECTROLYTIC CELLS

Improved Gas Seal for Electrolytic
Cells
NPO-15163 B83-10366 04

Trace-Level Solid-Polymer Electrolyte
Hygrometer
NPO-15722 B83-10645 06

ELECTROMAGNETIC NOISE

Measuring Excess Noise in SDL's
LAR-12938 B83-10004 01

ELECTROMAGNETIC WAVE FILTERS

Computation of Bragg Reflection for
Layered Microstructures
NPO-15880 B83-10300 03

ELECTROMAGNETIC WAVE

TRANSMISSION
Transmitting Electromagnetic Energy
into Liquids
NPO-15868 B83-10266 01

ELECTROMECHANICAL DEVICES

Coaxial Redundant Drives
MFS-25171 B83-10197 07
Memory-Metal Electromechanical
Actuators
NPO-15960 B83-10661 07

ELECTRON BEAM WELDING

Controlling the Focus in
Electron-Beam Welders
MFS-19814 B83-10664 07

Ribbon Reduces Spiking in
Electron-Beam Welding
MFS-19701 B83-10698 08

Hot Forming With Electron-Beam
Welder
MSC-20413 B83-10724 08

ELECTRON BEAMS

Electron Beam Could Probe
Recombination Centers
NPO-15285 B83-10141 03

Sampling of Silicon Powder for
Impurity Analysis
NPO-15840 B83-10590 04

ELECTRON FLUX DENSITY

Charged Particle Flux Sensor
MFS-25461 B83-10021 03

ELECTRON OPTICS

Vibration-Isolation Bench for Testing
in Vacuum
GSC-12753 B83-10171 06

ELECTRON PROBES

Electron Beam Could Probe
Recombination Centers
NPO-15285 B83-10141 03

ELECTRON RECOMBINATION

Electron Beam Could Probe
Recombination Centers
NPO-15285 B83-10141 03

ELECTRONIC CONTROL

Using a PFET To Commutate an
SCR
NPO-15282 B83-10253 01

ELECTRONIC EQUIPMENT TESTS

Detection of Floating Inputs in Logic
Circuits
LAR-13073 B83-10528 02

ELECTRONIC MODULES

Repairable Encapsulated Electronic
Modules
NPO-15079 B83-10703 08

ELECTRONIC PACKAGING

Polymeric Applications in Electronics
NPO-16081 B83-10235 08
Low-Cost Alternatives in Hybrid
Microcircuit Packaging
MFS-25809 B83-10236 08

Heat-Pipe Thermal Switch
GSC-12644 B83-10384 06

ELECTROPLATING

Polyurethane Filler for Electroplating
MFS-19851 B83-10695 08

ELECTROSTATIC CHARGE

Blowing Dust Away With Electrostatic
Wind
HQN-10936 B83-10261 01

ELECTROSTATIC SHIELDING

Improved Connector Shell for Cable
Shields
NPO-15584 B83-10006 01

ELLIPTICAL ORBITS

Elliptical Orbit Performance Computer
Program
LAR-13026 B83-10632 06

EMBOLISMS

Speculation on Ultrasonic
Disintegration of Arterial Deposits
MFS-25161 B83-10600 05

ENCAPSULATING

Polymeric Applications in Electronics
NPO-16081 B83-10235 08
Low-Cost Alternatives in Hybrid
Microcircuit Packaging
MFS-25809 B83-10236 08

Packaging Nuclear and Chemical
Waste for Disposal
NPO-15454 B83-10348 04

ENERGY ABSORPTION

Two-Fluid Solar Pond
NPO-15419 B83-10316 03

ENERGY CONSERVATION

Drying Milk With Boiler Exhaust
NPO-15923 B83-10297 03
Low-Pressure Alcohol Distillation
MFS-25516 B83-10345 04

ENERGY CONSUMPTION

Energy-Saving Inverter
NPO-15291 B83-10500 01

SUBJECT INDEX

ENERGY CONVERSION

Printed Circuit Converts RF Energy
to dc Power
LEW-13913 B83-10002 01

Solar-Pond Resources in the United
States
NPO-15681 B83-10150 03

Instrumentation and Control for
Fossil-Energy Processes
NPO-15581 B83-10531 02

ENERGY CONVERSION EFFICIENCY

Multiple-Band-Gap Solar-Cell
Concept
MFS-25724 B83-10517 01

Improved Heat-Engine Solar-Energy
System
NPO-15762 B83-10560 03

ENERGY TECHNOLOGY

Parabolic Solar Collectors
NPO-15674 B83-10564 03

ENERGY TRANSFER

Long Heat Pipe Transports 2.6 kW
NPO-16017 B83-10608 06

ENGINE CONTROL

Feedback Control of Rotor
Overspeed
ARC-11404 B83-10668 07

ENGINE DESIGN

Off-Design Turbine Modeling
LEW-13674 B83-10195 06
Staging Two-Phase Turbines
NPO-15037 B83-10444 07

ENTRANCES

Airlock Entry
NPO-15415 B83-10720 08

ENVIRONMENT SIMULATION

The Effect of Cosmic Rays on MSI
Devices
NPO-15779 B83-10263 01

ENVIRONMENT SIMULATORS

Simulating Atmospheric Turbulence
MFS-25850 B83-10377 06

ENVIRONMENTAL MONITORING

Lightning-Transient Recorder
NPO-15895 B83-10272 02
Telemetry Speeds Forest-Fire
Control
ARC-11438 B83-10279 02

Crystal Microbalance Monitors
Relative Humidity
NPO-15493 B83-10388 06
Rain and Dew Detector
NPO-15370 B83-10405 06

ENVIRONMENTAL QUALITY

Effects of Outdoor Soiling on
Photovoltaic Modules
NPO-15186 B83-10317 03

EPOXY MATRIX COMPOSITES

Low-Weight Inserts for Aluminum
Honeycomb Panels
MSC-20227 B83-10116 08

Epoxy Grout With Silica Thickener
NPO-15202 B83-10358 04

EPOXY RESINS

Standards for Epoxies Used in
Microelectronics
MFS-25810 B83-10042 04
Measuring Epoxy-Curing Kinetics
NPO-15710 B83-10152 04

ERROR ANALYSIS

Rounding Technique for High-Speed
Digital Signal Processing
NPO-15307 B83-10014 02

Power-Measurement Errors Due to
Instrument Lag
NPO-15029 B83-10516 01

ERROR CORRECTING DEVICES

NRZ Data Asymmetry Corrector and
Convolutional Encoder
MSC-20187 B83-10133 02

Error-Compensated Integrate and
Hold
ARC-11303 B83-10255 01

Eliminating Doppler Effects in
Synthetic-Aperture Radar Optical
Processors
NPO-14998 B83-10291 02

ESTIMATING

Methods for Estimating
Payload/Vehicle Design Loads
NPO-15550 B83-10184 06

ETCHANTS

Etchants for Some
Corrosion-Resistant Metals
MFS-25467 B83-10586 04

ETCHING

Modified Fabrication for InGaAsP
Strip Laser
LAR-12986 B83-10705 08

EVACUATING (TRANSPORTATION)

Safe Emergency Evacuation From
Tall Structures
KSC-11225 B83-10643 06

EVAPORATION

Evaporation Tower With Prill
Nozzles
NPO-15609 B83-10322 03

EXCAVATION

Bidirectional Continuous Coal Miner
NPO-15166 B83-10432 07
Miner for Cutting Entry Passages in
Coal Seams
NPO-15167 B83-10433 07

EXHAUST NOZZLES

Code Solves Three-Dimensional
Navier-Stokes Equations
LAR-12962 B83-10075 06

Transonic, Axisymmetric Flow Over
Nozzle Afterbodies With Supersonic Jet
Exhausts
LAR-12957 B83-10187 06

EXHAUST SYSTEMS

Holding Tubes in Place for Brazing
MFS-19658 B83-10211 07

EXPANSION

Hydraulic Tube Expander
MFS-19731 B83-10682 07

EXPERIMENT DESIGN

Designing Flat-Plate Photovoltaic
Arrays
NPO-15729 B83-10305 03

EXPLORATION

Radar Cuts Subsoil Survey Costs
KSC-11227 B83-10276 02

EXPLOSIVE DEVICES

Low-Shock Pyrotechnic Actuator
LAR-13198 B83-10636 06
Reusable Release Mechanism
MSC-20080 B83-10666 07

EXTENSIONS

Torque-Wrench Extension Arm
NPO-15495 B83-10447 07

EXTENSOMETERS

Electronic Dilatometer
GSC-12738 B83-10168 06
Automated Mercury Dilatometer
NPO-14884 B83-10604 06

EXTINGUISHING

Flame-Test Chamber
NPO-15407 B83-10719 08

FATIGUE (MATERIALS)

EXTREME ULTRAVIOLET RADIATION

Computation of Bragg Reflection for
Layered Microstructures
NPO-15880 B83-10300 03

EXTRUDING

Aromatic Polyimides With Group VI
Linkages
LAR-12980 B83-10031 04

Fire-Resistant TFE Extrusions
MFS-25917 B83-10577 04

F

FABRICATION

Measuring Tension in Transistor
Suspensions
NPO-15677 B83-10128 01

Forming Mirrors on Composite
Materials
NPO-15912 B83-10215 08

Preparing Solar Cells for Soldering
NPO-15626 B83-10218 08

Fabrication of Structural Cellular
Glass
NPO-15731 B83-10223 08

Producing Metallic Glasses With
Acoustic Levitation
NPO-15658 B83-10231 08

Studies of the Inverted Meniscus
Deposition of Silicon on Ceramic
NPO-15602 B83-10234 08

Wicking Coating for Heat Pipes
NPO-15212 B83-10485 08

FAIL-SAFE SYSTEMS

Inflatable Rescue Capsules
MFS-25677 B83-10372 05

FAILURE

Detecting Solar-Cell Failures
NPO-15741 B83-10129 01

FAILURE ANALYSIS

Hardware Fault Simulator Generates
Test Vectors For Complex IC's
NPO-15362 B83-10538 02

FARM CROPS

Determining Frost Depth and
Density
MFS-25754 B83-10403 06

FASTENERS

Hot-Melt Adhesive Attachment
System
LAR-12894 B83-10109 08

Spool-Valve Pressure-Difference
Regulator
MSC-20127 B83-10200 07

Retractable Rotating Door Latch
MSC-20304 B83-10201 07

Locking Bolt
MSC-20439 B83-10202 07

Plastic Clamp Retains Clevis Pin
MFS-19747 B83-10207 07

Self-Locating Latch
MFS-25956 B83-10446 07

In Situ Composite Fastener
LAR-12939 B83-10463 08

Sealant Applicator for Fastener
Heads
MFS-25922 B83-10487 08

FATIGUE (MATERIALS)

Stress Corrosion Cracking of Certain
Aluminum Alloys
MFS-25773 B83-10160 04

Random Life Curves for Common
Engineering Materials
MSC-20433 B83-10163 04

- Repairing Hidden Cracks in Coolant Tubes
MFS-19796 B83-10689 08
- FATIGUE TESTING MACHINES**
Portable Fatigue-Testing Machine
MFS-19459 B83-10649 06
- FATIGUE TESTS**
Fatigue Testing of Heat-Exchanger Tubes
MFS-19599 B83-10648 06
- FAULT TOLERANCE**
Continuity/Isolation Checker
NPO-15632 B83-10518 01
Self-Checking Memory Interface
NPO-15889 B83-10521 02
- FEEDBACK CIRCUITS**
Band-Pass Amplifier Without Discrete Reactance Elements
GSC-12788 B83-10247 01
- FEEDBACK CONTROL**
Feedback Control of Rotor Overspeed
ARC-11404 B83-10668 07
- FEET (ANATOMY)**
Lightweight, Economical Device Alleviates Drop Foot
LAR-12259 B83-10165 05
- FERMENTATION**
Removing Biostatic Agents From Fermentation Solutions
NPO-15806 B83-10370 05
- FERTILIZERS**
Generating SiF₄ From H₂SiF₆
NPO-15721 B83-10155 04
- FIBER COMPOSITES**
Fabrication of Graphite/Epoxy Column Elements
LAR-12915 B83-10115 08
SixNyCz Fibers for Safer Composites
MFS-25721 B83-10331 04
Making SixNyCz Fibers by Pyrolysis
MFS-25621 B83-10585 04
- FIBER OPTICS**
Fabricating Grating Couplers on Optical Fibers
MSC-20286 B83-10019 03
Optical-Fiber-to-Channel-Waveguide Coupler
NPO-15555 B83-10029 03
Grating Demultiplexers for Optical Signals
LAR-12748 AND LAR-12749 B83-10147 03
Polymer Bonding of Optical Fibers
NPO-15464 B83-10224 08
Effect of Temperature on Fiber-Optic Delay
NPO-15148 B83-10318 03
Stabilizing Fiber-Optic Transmission Lines
NPO-15036 B83-10319 03
- FIBER ORIENTATION**
Determining the Orientation of Anisotropic Materials
MSC-20229 B83-10054 06
- FIBERS**
Polycarbosilazane-Resin on Process
MFS-25758 B83-10330 04
Fabrication of Multi-Ply Birefringent Fibrous Composite Laminates
LAR-12960 B83-10704 08
- FIELD EFFECT TRANSISTORS**
Using a PFET To Commutate an SCR
NPO-15282 B83-10253 01
- Improved High-Current Drive Circuit
NPO-14938 B83-10269 01
Energy-Saving Inverter
NPO-15291 B83-10500 01
- FILLERS**
Pull Test Verifies Gap Loading
MSC-20231 B83-10119 08
Polyurethane Filler for Electroplating
MFS-19851 B83-10695 08
- FILM THICKNESS**
Paint-Thickness Checker
KSC-11270 B83-10520 01
- FINANCIAL MANAGEMENT**
KSC Construction Cost Index
KSC-11252 B83-10241 09
Conceptual Cost Estimating
KSC-11253 B83-10242 09
- FINITE ELEMENT METHOD**
System for Structural Synthesis Combines Finite-Element Analysis and Optimization Programs
LAR-13046 B83-10623 06
- FIRE FIGHTING**
Training Simulator for Fire Management
MFS-25898 B83-10495 09
- FIRE PREVENTION**
Control-Chain Safety Tray and Friction Pull
MSC-20401 B83-10416 07
- FIREBREAKS**
Improved Polyimide Intumescent Coating
ARC-11369 B83-10338 04
- FIREPROOFING**
Fire-Resistant Composites
ARC-11331 B83-10041 04
- FITTINGS**
Lock for Tube Fittings
MFS-25964 B83-10440 07
Tube Alignment for Machining
MFS-19719 B83-10663 07
- FIXTURES**
Holder for Fragile Parts
MFS-25772 B83-10212 07
Shear-Panel Test Fixture Eliminates Corner Stresses
LAR-12930 B83-10383 06
Handling Fixture for Solar-Cell Arrays
NPO-15908 B83-10450 08
Erectable Space-Construction Fixture
MSC-20259 B83-10469 08
Tool Support Ring
MFS-19765 B83-10665 07
- FLAME PROPAGATION**
Flame-Test Chamber
NPO-15407 B83-10719 08
- FLAME RETARDANTS**
Making Thermoplastics Flame-Resistant
NPO-14857 B83-10363 04
- FLAME SPRAYING**
Reinforcement for Stretch Formed Sheet Metal
MSC-20228 B83-10108 08
- FLAME TEMPERATURE**
Radially-Graduated Profile
MFS-19831 B83-10607 06
- FLAMES**
Acoustic Emissions Reveal Combustion Conditions
NPO-15699 B83-10140 03
- FLANGES**
Hot Forming With Electron-Beam Welder
MSC-20413 B83-10724 08
- FLEXIBILITY**
Perfluoroalkylene-Ether Triazine Elastomers
ARC-11402 B83-10335 04
- FLEXING**
Adjusting the Contour of Reflector Panels
NPO-15319 B83-10721 08
- FLIGHT MECHANICS**
General Maneuver Program
GSC-12802 B83-10630 06
- FLIGHT SIMULATION**
Mathematical Simulation of Flight Maneuvers
NPO-15395 B83-10644 06
- FLIP-FLOPS**
Flip-Flop Digital Modulator
MSC-20334 B83-10505 01
- FLOATS**
Inflatable Rescue Capsules
MFS-25677 B83-10372 05
- FLOORS**
Waterproof Raised Floor Makes Utility Lines Accessible
ARC-11363 B83-10605 06
- FLOW CHARACTERISTICS**
Estimating Pump Blockage
MFS-19763 B83-10414 07
Stalled-Flow and Head-Loss Model for Diffuser Pumps
MFS-19748 B83-10673 07
- FLOW CHARTS**
Flow Chart for Management
NPO-15014 B83-10492 09
- FLOW DISTRIBUTION**
Code Solves Three-Dimensional Navier-Stokes Equations
LAR-12962 B83-10075 06
Flow Through a Rotating Turbomachinery Blade Row
LEW-13832 B83-10102 07
Calculating the Flow Field in a Radial Turbine Scroll
LEW-13437 B83-10104 07
Axial Compressor Design and Analysis
LEW-13488 B83-10196 06
Flow-Straightener Sleeve for Pump Valve
MFS-19781 B83-10385 06
Transonic Airfoil Analysis
ARC-11436 B83-10395 06
Autocovariance Computer
LAR-12968 B83-10615 06
Analyzing Flow Fields in Axial-Compressor Rotors and Stators
LEW-13910 B83-10629 06
- FLOW EQUATIONS**
Compressible Flow About Wind Turbine Blades
LEW-13740 B83-10103 07
Solutions of Transonic Flow in Turbomachines
LEW-13896 B83-10186 06
Steady, Nonrotating, Blade-to-Blade Potential Transonic Cascade Flow Analysis Code
LEW-13854 B83-10189 06
PANEL Code for Planar Cascades
LEW-13862 B83-10190 06
- FLOW MEASUREMENT**
Radial-Cascade Analysis
MFS-19752 B83-10391 06

- Laser Diode Schlieren Photography
LAR-12897 B83-10559 03
- FLOW RESISTANCE**
In Situ Measurement of
Ground-Surface Flow Resistivity
LAR-13053 B83-10606 06
- FLOW THEORY**
Advances in Multivalued-Velocity
Theory of Turbulence
NPO-16006 B83-10622 06
- FLOW VELOCITY**
Swirl Diffuser
MSC-18996 B83-10173 06
- FLOW VISUALIZATION**
Simulating a Three-Dimensional Flow
in Pipes
ARC-11466 B83-10638 06
- FLOWMETERS**
Miniature Airflow Sensor
LAR-13065 B83-10603 06
- FLUE GASES**
Removing Sulfur Dioxide From Flue
Gases
NPO-15758 B83-10593 04
- FLUID FLOW**
Discriminating Between Liquid and
Gas Flows
NPO-15531 B83-10050 06
Calculating Static-Seal Leakage
Correlation
MFS-19674 B83-10175 06
Multivalued-Velocity-Field Model of
Turbulence
NPO-15748 B83-10183 06
Steady, Nonrotating, Blade-to-Blade
Potential Transonic Cascade Flow
Analysis Code
LEW-13854 B83-10189 06
Improved Laser Velocimeter
MFS-25465 B83-10312 03
Transonic Airfoil Analysis
ARC-11436 B83-10395 06
Imaging Fluid Flow
MFS-25897 B83-10543 03
Simulating a Three-Dimensional Flow
in Pipes
ARC-11466 B83-10638 06
- FLUID PRESSURE**
Reusable High-Pressure Connector
MSC-20339 B83-10097 07
- FLUID TRANSMISSION LINES**
Reusable High-Pressure Connector
MSC-20339 B83-10097 07
- FLUORINE**
Fluorine Mixer/Vaporizer for
Chemical Lasers
NPO-15552 B83-10311 03
- FLUOROCARBONS**
Radiation Improves Materials
Bonding
NPO-14995 B83-10364 04
- FLUOROSILICATES**
Generating SiF₄ From H₂SiF₆
NPO-15721 B83-10155 04
- FLUTTER**
Two-Degree-of-Freedom Mount
System for Flutter Models
LAR-12950 B83-10062 06
- FOAMING**
Low-Density High-Strength Foamed
Materials
NPO-15411 B83-10575 04
- FOAMS**
Charring, Nonmelting Epoxy Foams
MFS-25911 B83-10571 04
- Repairable Encapsulated Electronic
Modules
NPO-15079 B83-10703 08
- FOCUSING**
Precise Measurement of Effective
Focal Length
GSC-12745 B83-10023 03
- FOILS (MATERIALS)**
Foil Panel Mirrors for Nonimaging
Applications
GSC-12751 B83-10449 08
- FOOD CHAIN**
Yeasts With Increased Glycogen
Levels
NPO-15571 B83-10601 05
- FOOD PROCESSING**
Evaporation Tower With Prill
Nozzles
NPO-15609 B83-10322 03
- FORECASTING**
Least-Squares Prediction of Solar
Activity
MFS-25870 B83-10303 03
- FOREST FIRES**
Telemetry Speeds Forest-Fire
Control
ARC-11438 B83-10279 02
- FOREST MANAGEMENT**
Forest Resource Information System
MSC-20270 B83-10245 09
- FORESTS**
Forest Resource Information System
MSC-20270 B83-10245 09
- FORMING TECHNIQUES**
Fitting Flexible Coverings to
Contoured Surfaces
MSC-20503 B83-10691 08
- FORMULAS (MATHEMATICS)**
Predicting Singered-Metal Resistivity
From Porosity
NPO-15587 B83-10158 04
- FORTRAN**
FORTRAN Static Source Code
Analyzer
GSC-12724 B83-10738 09
NAMELIST Preprocessor Program
GSC-12711 B83-10740 09
- FOSSIL FUELS**
Instrumentation and Control for
Fossil-Energy Processes
NPO-15581 B83-10531 02
- FOUNDATIONS**
Shock Mounting for Heavy Machines
MFS-25888 B83-10420 07
Aligning Solder Pads on a Solar Cell
NPO-15298 B83-10732 08
- FOURIER TRANSFORMATION**
Electronically-Scanned
form Spectrometer
NPO-15844 B83-10292 02
- FRACTURE STRENGTH**
Fracture Strength of Silicon Solar
Cells
NPO-15187 B83-10181 06
- FRACTURES (MATERIALS)**
Eddy-Current Damage Test for
Carbon Composites
MSC-20358 B83-10177 06
- FRAMES**
Test Frame Simulates Zero Gravity
MFS-25518 B83-10637 06
Locking Corners Speed Solar-Array
Frame Assembly
NPO-15750 B83-10697 08
- FREQUENCY CONTROL**
Central Control of Local Oscillator
Frequencies
GSC-12804 B83-10533 02
- FREQUENCY MODULATION**
Flip-Flop Digital Modulator
MSC-20334 B83-10505 01
- FREQUENCY RANGES**
Receiver for Antenna Arrays
NPO-15089 B83-10015 02
- FREQUENCY STANDARDS**
Efficient Distribution of
Frequency-Standard Signals
NPO-15392 B83-10012 02
Hydrogen Masers as Time and
Frequency Standards
NPO-15858 B83-10298 03
- FRICTION MEASUREMENT**
Instrument Measures Airflow Friction
Without Contact
ARC-11354 B83-10047 06
- FRICTIONLESS ENVIRONMENTS**
Electrostatic Levitator With Feedback
Control
NPO-15553 B83-10228 08
- FROST**
Frost Forecasting for Fruitgrowers
KSC-11241 B83-10243 09
Determining Frost Depth and
Density
MFS-25754 B83-10403 06
- FROST DAMAGE**
Frost Forecasting for Fruitgrowers
KSC-11241 B83-10243 09
- FRUITS**
Frost Forecasting for Fruitgrowers
KSC-11241 B83-10243 09
- FUEL CELLS**
Fuel-Cell Reactant-Gas Purifier
MSC-20103 B83-10032 04
Calcium Free Asbestos for Fuel
Cells
MSC-20207 B83-10154 04
- FUEL COMBUSTION**
Acoustic Emissions Reveal
Combustion Conditions
NPO-15699 B83-10140 03
- FUEL GAGES**
'Fuel Gage' for Electric Vehicles
NPO-15759 B83-10277 02
Pulse Response Yields Battery
Charge State
NPO-14882 B83-10285 02
- FUEL PRODUCTION**
Destroying Toxic Wastes
NPO-15655 B83-10582 04
- FUEL-AIR RATIO**
Acoustic Emissions Reveal
Combustion Conditions
NPO-15699 B83-10140 03
- FUELS**
Hydrogen Production From Heavy
Fuels
NPO-14826 B83-10362 04
- FURFURYL ALCOHOL**
Solvent Extraction of Furfural From
Biomass
NPO-15987 B83-10599 05
- FURNACES**
High-Temperature, Low-Gravity
Casting Furnace
MFS-25605 B83-10596 04
Furnace for Rapid Heating and
Cooling
MFS-25707 B83-10597 04

FUSIBILITY

SUBJECT INDEX

FUSIBILITY

Automated Variable-Polarity
Plasma-Arc Welding
MFS-27042 B83-10722 08

FUSION

Hollow-Sphere Production Line
NPO-15592 B83-10230 08

G

GALLIUM ARSENIDE LASERS

Modified Fabrication for InGaAsP
Strip Laser
LAR-12986 B83-10705 08

GALLIUM ARSENIDES

Low-Cost GaAs Solar Cells
NPO-14914 B83-10476 08

GAPS

Gage Measures Recessed Gaps
MSC-20230 B83-10089 07
Pull Test Verifies Gap Loading
MSC-20231 B83-10119 08

GAS CHROMATOGRAPHY

Measuring Diffusion and
Recombination Polycrystalline Silicon
ARC-11431 B83-10040 04
Leak Tester for Cryogenic Flowlines
MSC-20233 B83-10174 06
Measuring Trace Hydrocarbons in
Silanes
NPO-15273 B83-10359 04

GAS DETECTORS

Improved O₂/H₂ Gas Mixture
Sensor
MSC-20408 B83-10156 04
Detecting Methane Leaks
NPO-15790 B83-10329 04

GAS DISSOCIATION

Nitrogen Supply Uses Hydrazine
ARC-11464 B83-10343 04

GAS FLOW

Discriminating Between Liquid and
Gas Flows
NPO-15531 B83-10050 06
Measuring Small Leak Holes
MSC-20113 B83-10063 06
Pressure Reducer for Coal Gasifiers
NPO-15100 B83-10084 07
Swirl Diffuser
MSC-18996 B83-10173 06
Manometer Measures Gas Flow
NPO-15686 B83-10178 06
Transonic Airfoil Analysis
ARC-11436 B83-10395 06

GAS LUBRICANTS

Air-Lubricated Lead Screw
NPO-15617 B83-10101 07

GAS MIXTURES

Fuel-Cell Reactant-Gas Purifier
MSC-20103 B83-10032 04
Improved O₂/H₂ Gas Mixture
Sensor
MSC-20408 B83-10156 04

GAS PIPES

Expander for Thin-Wall Tubing
MFS-19739 B83-10203 07

GAS TEMPERATURE

Gas-Temperature Measurement With
Minimal Perturbation
MSC-20338 B83-10061 06
Measuring High Gas Temperatures
LEW-13819 B83-10627 06

GAS TURBINES

Radially-Graduated
ture Profile
MFS-19831 B83-10607 06

GAS WELDING

Coil Welding Aid
MSC-20470 B83-10088 07

GASEOUS DIFFUSION

Swirl Diffuser
MSC-18996 B83-10173 06

GEARS

Thermal Elastohydrodynamic
Lubrication of Spur Gears
LEW-13528 B83-10213 07
Designing More-Efficient Spur Gears
LEW-13921 B83-10662 07

GEOMETRY

Optimizing Grid Patterns on
Photovoltaic Cells
NPO-15841 B83-10709 08

GEOSYNCHRONOUS ORBITS

Monte Carlo Investigation of
Trajectories
GSC-12705 B83-10074 06

GERT

Information-Systems Data-Flow
Diagram
NPO-15492 B83-10121 09
Subcritical Wing Design Code
LAR-12959 B83-10193 06

GLASS

Freeze/Thaw Properties of Cellular
Glass
NPO-15854 B83-10162 04
Dielectric Scanning Locates Voids in
Glass Foam
NPO-15728 B83-10176 06
Fabrication of Structural Cellular
Glass
NPO-15731 B83-10223 08
Producing Metallic Glasses With
Acoustic Levitation
NPO-15658 B83-10231 08
Evaluation of Structural Cellular
Glass
NPO-15680 B83-10339 04
Dissolving Bubbles in Glass
NPO-15105 B83-10347 04
Glass for Solar Concentrators
NPO-14923 B83-10354 04
Containerless Processing of
Advanced Glasses
MFS-27002 B83-10581 04
Hollow Spheres of Metallic Glass
NPO-15991 B83-10583 04

GLASS COATINGS

Two-Layer Glass Thermal-Control
Coating
ARC-11164 B83-10573 04

GLASS FIBER

REINFORCED
Fabrication of Multi-Ply Birefringent
Fibrous Composite Laminates
LAR-12960 B83-10704 08

GLASS FIBERS

Collecting Light From Point Images
NPO-15887 B83-10542 03

GLYCOGENS

Yeasts With Increased Glycogen
Levels
NPO-15571 B83-10601 05

GLYCOLS

Gelled Anti-icing Agents
MSC-20088 B83-10036 04
Modified Antifreeze Liquids for Use
on Surfaces
MFS-25741 B83-10043 04

GORES

Testing Large Solar Mirrors
NPO-15404 B83-10294 03

GRAIN BOUNDARIES

Microfissuring in Alloys During
Welding
MFS-25604 B83-10725 08

GRAPHITE-EPOXY COMPOSITES

More-Uniform Heat Curing for
Structural Repairs
MSC-20101 B83-10114 08
Fabrication of Graphite/Epoxy
Column Elements
LAR-12915 B83-10115 08
Electronic Dilatometer
GSC-12738 B83-10168 06
Strain Analysis of Graphite/Epoxy
Vessels
MFS-27018 B83-10714 08

GRAPHS (CHARTS)

Estimating Waveguide Feed
Directivity and Spacing
NPO-15603 B83-10144 03
Determining Normal-Distribution
Tolerance Bounds Graphically
MSC-20115 B83-10238 09

GRATINGS (SPECTRA)

Fabricating Grating Couplers on
Optical Fibers
MSC-20286 B83-10019 03
Simplified Laser Tuning
NPO-15690 B83-10308 03
Optical Measurement of Particle Size
and Velocity
MFS-27036 B83-10554 03
Efficiency of Reflection Gratings
NPO-15852 B83-10567 03

GRINDING MACHINES

Tooling Converts Stock Bearings To
Custom Bearings
LAR-12922 B83-10090 07
Air Guide for Sheet-Metal Grinder
MFS-19788 B83-10423 07
Controlling Sanding Depth
MFS-19713 B83-10438 07

GROUND TESTS

In Situ Measurement of
Ground-Surface Flow Resistivity
LAR-13053 B83-10606 06

GROUT

Epoxy Grout With Silica Thickener
NPO-15202 B83-10358 04

GUIDANCE (MOTION)

Automatic Guidance System for
Welding Torches
MFS-25807 B83-10690 08

GUIDANCE SENSORS

Sun Tracker Operates a Year
Between Calibrations
NPO-15810 B83-10546 03

GUSTS

Simulating Atmospheric Turbulence
MFS-25850 B83-10377 06

H

HALIDES

Controlling Metal-Halide Vapor
Density in Lasers
NPO-15021 B83-10310 03

HANDBOOKS

Electronic-Power-Transformer Design
Guide
LEW-13208 B83-10131 01

SUBJECT INDEX

Polymeric Applications in Electronics
NPO-16081 B83-10235 08
SCM Handbooks for dc-to-dc
Converters
LEW-13886 B83-10258 01

HANDLING EQUIPMENT
Latch for Stored Cargo
MFS-25837 B83-10407 07

HARDENING (MATERIALS)
High-Temperature, Low-Gravity
Casting Furnace
MFS-25605 B83-10596 04

HAULING
Improved Cattle Hauler
FRC-11058 B83-10020 03

HEALTH PHYSICS
Controlling Industrial Noise
LAR-13001 B83-10030 03

HEART RATE
Heart-Rate and Breath-Rate Monitor
MSC-20078 B83-10045 05

HEAT EXCHANGERS
Controlling Heat-Exchanger Outlet
Temperature
MFS-19667 B83-10170 06
Electrodeposition Repair of Damaged
Metal Parts
MFS-19783 B83-10221 08
Airflow Assists Solar Receiver
NPO-15784 B83-10545 03
Improved Heat-Engine Solar-Energy
System
NPO-15762 B83-10560 03
Repairing Hidden Cracks in Coolant
Tubes
MFS-19796 B83-10689 08

HEAT MEASUREMENT
Gas-Temperature Measurement With
Minimal Perturbation
MSC-20338 B83-10061 06
Measuring Epoxy-Curing Kinetics
NPO-15710 B83-10152 04
Temperature-Averaging Thermal
Probe
GSC-12795 B83-10614 06

HEAT PIPES
Heat-Pipe Thermal Switch
GSC-12644 B83-10384 06
Wicking Coating for Heat Pipes
NPO-15212 B83-10485 08
Long Heat Pipe Transports 2.6 kW
NPO-16017 B83-10608 06

HEAT SHIELDING
Light, Serviceable Insulation Blanket
MSC-20452 B83-10220 08

HEAT SINKS
High-Absorptance Radiative Heat
Sink
GSC-12739 B83-10110 08

HEAT STORAGE
Cost Effectiveness of Hybrid Solar
Powerplants
NPO-15735 B83-10149 03
Bricks and Cans for Thermal
Storage
MFS-25625 B83-10315 03
Two-Fluid Solar Pond
NPO-15419 B83-10316 03
Saltless Solar Ponds
NPO-15808 B83-10563 03

HEAT TRANSFER
Passive Module for Cryogenic
Refrigeration
ARC-11263 B83-10401 06
Variable-Conductance Heat-Transfer
Module
GSC-12771 B83-10408 07

HEAT TRANSMISSION
Low-Thermal-Resistance Baseplate
Mounting
MFS-25908 B83-10613 06

HEAT TREATMENT
More-Uniform Heat Curing for
Structural Repairs
MSC-20101 B83-10114 08
Additional Heat Treatment for
Silica-Fiber Insulation
MSC-20600 B83-10588 04
Heater Ensures Strain-Gage Bond
Reliability
MFS-19859 B83-10619 06
Securing Identification Sleeving
MFS-19685 B83-10716 08

HEATING
Furnace for Rapid Heating and
Cooling
MFS-25707 B83-10597 04

HEATING EQUIPMENT
Improving A Guarded Hotplate
MSC-20447 B83-10069 06
Hot-Melt Adhesive Attachment
System
LAR-12894 B83-10109 08
Gas-Bearing Crucible for Shot
Tower
NPO-15070 B83-10229 08
Improved Silicon-Growth Chamber
NPO-15237 B83-10471 08
Toroidal Ellipsoid Float-Zone Heater
MFS-25771 B83-10711 08

HELICAL WINDINGS
Bender/Coiler for Tubing
MSC-20410 B83-10206 07

HETERODYNING
Directional Coupler With Increased
Directivity
NPO-15892 B83-10252 01

HIGH PASS FILTERS
Laser Diode Schlieren Photography
LAR-12897 B83-10559 03

HIGH TEMPERATURE LUBRICANTS
Thermal Elastohydrodynamic
Lubrication of Spur Gears
LEW-13528 B83-10213 07

HIGH TEMPERATURE TESTS
J-Channel Locks Potting to
Compression Panel
LAR-12913 B83-10179 06

HISTOGRAMS
Digital-Image Enhancement
MFS-25679 B83-10530 02

HOLDERS
Sample Holder for Cryogenic
Adhesive Shear Test
MFS-25729 B83-10060 06
Holder for Fragile Parts
MFS-25772 B83-10212 07

HOLLOW CATHODES
Improved Hollow Cathode
NPO-15560 B83-10555 03

HOLOGRAPHIC INTERFEROMETRY
Holographic Twyman-Green
Interferometer
NPO-15754 B83-10301 03

HOLOGRAPHY
Efficiency of Reflection Gratings
NPO-15852 B83-10567 03

HOMOPOLAR GENERATORS
Brushless Low-Speed dc
Tachometer
NPO-15706 B83-10650 06

HYDROGENATION

HONEYCOMB STRUCTURES
High-Absorptance Radiative Heat
Sink
GSC-12739 B83-10110 08
Low-Weight Inserts for Aluminum
Honeycomb Panels
MSC-20227 B83-10116 08
Saltless Solar Ponds
NPO-15808 B83-10563 03

HOT WORKING
Hot Microfissuring in Nickel Alloy
MFS-25763 B83-10587 04
Hot Forming With Electron-Beam
Welder
MSC-20413 B83-10724 08

HUMAN FACTORS ENGINEERING
Adjustable Walker for the
Handicapped
LAR-12990 B83-10369 05
Three-Fingered Robot Hand
NPO-15959 B83-10409 07
Control-Chain Safety Tray and
Friction Pull
MSC-20401 B83-10416 07
Three-Level Control of Manipulators
NPO-15048 B83-10493 09

HUMIDITY MEASUREMENT
Crystal Microbalance Monitors
Relative Humidity
NPO-15493 B83-10388 06

HYBRID CIRCUITS
Low-Cost Alternatives in Hybrid
Microcircuit Packaging
MFS-25809 B83-10236 08

HYBRID STRUCTURES
Decoupling a Reflecting Layer From
Its Support Structure
NPO-15346 B83-10486 08

HYDRAULIC EQUIPMENT
Hydraulic Tube Expander
MFS-19731 B83-10682 07

HYDRAULIC JETS
Robotic Water Blast Cleaner
MFS-25519 B83-10092 07

HYDROCARBON FUELS
Three-Zone Catalyst Resists Sulfur
Poisoning
NPO-14827 B83-10356 04

HYDROCARBONS
Measuring Diffusion and
Recombination Polycrystalline Silicon
ARC-11431 B83-10040 04

HYDROGEN
Cooling by Para-to-Ortho-Hydrogen
Conversion
GSC-12770 B83-10024 03
Improved Coil for Hydrogen
Dissociators
MFS-25638 B83-10262 01

HYDROGEN COMPOUNDS
Supercritical-Multiple-Solvent
on From Coal
NPO-15767 B83-10153 04

HYDROGEN MASERS
Hydrogen Masers as Time and
Frequency Standards
NPO-15858 B83-10298 03

HYDROGEN PRODUCTION
Hydrogen Production From Heavy
Fuels
NPO-14826 B83-10362 04

HYDROGENATION
Desulfurizing Coal By Chlorinolysis
and Hydrogenation
NPO-15304 B83-10034 04

HYDROTHERMAL SYSTEMS

- Solar-Pond Resources in the United States
NPO-15681 B83-10150 03
- HYGROMETERS**
Trace-Level Solid-Polymer Electrolyte Hygrometer
NPO-15722 B83-10645 06

I**ICE ENVIRONMENTS**

- Antenna for Imaging Sea Ice
NPO-15352 B83-10271 01

ICE MAPPING

- Radar for Mapping Sea Ice
NPO-15350 B83-10135 02

ICE PREVENTION

- Gelled Anti-icing Agents
MSC-20088 B83-10036 04
- Modified Antifreeze Liquids for Use on Surfaces
MFS-25741 B83-10043 04

ICOSAHEDRONS

- General-Purpose Icosahedral Structure
GSC-12854 B83-10612 06

IDLERS

- Wire Electrical-Discharge Machining Aid
MFS-19643 B83-10686 07

IMAGE ENHANCEMENT

- Interstitial Digital-Image-Point Generator
MFS-25871 B83-10525 02
- Digital-Image Enhancement
MFS-25679 B83-10530 02

IMAGE PROCESSING

- Sharp-Focus Composite Microscope Imaging by Computer
NPO-15207 B83-10167 05
- Pairwise Comparison of Voltage Sets
LAR-12929 B83-10256 01
- Digital SAR Processor
NPO-15519 B83-10287 02
- Eliminating 'Hotspots' in Digital Image Processing
NPO-15684 B83-10527 02
- Collecting Light From Point Images
NPO-15887 B83-10542 03

IMAGE RECONSTRUCTION

- Sharp-Focus Composite Microscope Imaging by Computer
NPO-15207 B83-10167 05

IMAGE RESOLUTION

- Interstitial Digital-Image-Point Generator
MFS-25871 B83-10525 02
- Improved Gamma-and X-Ray Pinhole Camera
GSC-12851 B83-10539 03
- High-Resolution X-Ray Telescope
NPO-15971 B83-10551 03

IMAGING TECHNIQUES

- Normal-Incidence Soft-X-Ray Mirror
NPO-15828 B83-10145 03
- Imaging Bubble Formation In a Drop Tube
NPO-15114 B83-10324 03
- Acoustic Imaging of Combustion Noise
NPO-15698 B83-10547 03
- Lensless Image Scanner
NPO-16004 B83-10553 03

IMPACT RESISTANCE

- Acoustic Design Improves Composite Impact Resistance
LAR-12887 B83-10375 06

IMPACT TESTS

- Modified Oscillograph for Impacting Composite Materials
MFS-25901 B83-10406 06

IMPURITIES

- Solar-Cell Slide Rule
NPO-15646 B83-10106 08
- Sampling of Silicon Powder for Impurity Analysis
NPO-15840 B83-10590 04

INCIDENCE

- Normal-Incidence Soft-X-Ray Mirror
NPO-15828 B83-10145 03

INCOMPRESSIBLE FLOW

- Multivalued-Velocity-Field Model of Turbulence
NPO-15748 B83-10183 06

INCONEL (TRADEMARK)

- Checking Weld Composition
MFS-19628 B83-10481 08

INDUCTION HEATING

- Absorbable-Susceptor Welding of Ceramics
NPO-15640 B83-10217 08

INDUCTION MOTORS

- Digital Single-Phase Power-Factor Controller
MFS-25861 B83-10125 01

INDUCTORS

- Improved Two-Phase Switching Regulator
NPO-15172 B83-10267 01

INDUSTRIAL PLANTS

- Controlling Industrial Noise
LAR-13001 B83-10030 03

INDUSTRIAL WASTES

- Recycling Lithium Carbonate/Lithium Hydroxide Waste
KSC-11261 B83-10033 04

INELASTIC STRESS

- Mathematical Instability Criteria for Elastic Structures
NPO-15090 B83-10620 06

INFORMATION DISSEMINATION

- Automatic Control of Multimedia Shows
KSC-11080 B83-10286 02

INFORMATION SYSTEMS

- Information-Systems Data-Flow Diagram
NPO-15492 B83-10121 09

INFRARED DETECTORS

- Uncooled IR Detector
NPO-14832 B83-10265 01
- Growing Crystals for Infrared Detectors
MFS-25786 B83-10465 08

INFRARED SCANNERS

- Improved Infrared Multispectral Scanner
NPO-16143 B83-10552 03

INPUT/OUTPUT ROUTINES

- NAMELIST Preprocessor Program
GSC-12711 B83-10740 09

INSERTS

- Low-Weight Inserts for Aluminum Honeycomb Panels
MSC-20227 B83-10116 08
- Feedthrough Seal For High-Pressure Vessel
MSC-20625 B83-10502 01
- Burner-Injector-Post Tip
MFS-19827 B83-10683 07

INSPECTION

- Quality-Planning-Requirements
MSC-20280 B83-10233 08
- Eddy-Current Inspection of Narrow Metal Tubes
MFS-19742 B83-10374 06
- Inspecting Joints With Grooved Surfaces
MFS-25934 B83-10640 06

INSTALLING

- Retaining-Ring Installation Tool
MFS-19725 B83-10098 07
- Portable Roller Staking Tool
MSC-20281 B83-10208 07

INSTRUMENT COMPENSATION

- Sun Tracker Operates a Year Between Calibrations
NPO-15810 B83-10546 03

INSTRUMENT ERRORS

- Power-Measurement Errors Due to Instrument Lag
NPO-15029 B83-10516 01

INSTRUMENTS

- Electronically-Scanned form Spectrometer
NPO-15844 B83-10292 02

INSULATION

- Shell-Tile Thermal-Protection System
LAR-12862 B83-10051 06
- Improving A Guarded Hotplate
MSC-20447 B83-10069 06
- J-Channel Locks Potting to Compression Panel
LAR-12913 B83-10179 06
- Stripper for Cables of Any Cross Section
NPO-15631 B83-10443 07
- Better Thermal Insulation in Solar-Array Laminators
NPO-15925 B83-10451 08
- Repairing Damaged Power-Cable Insulation
KSC-11206 B83-10464 08
- Plasma-Sprayed Copper Tie-In for Nickel Plating
MFS-19481 B83-10584 04
- Bonded Lockstitch for Insulating Blankets
MSC-20283 B83-10688 08

INSULATORS

- Sialon Electrodes and Insulators for MHD Device
NPO-14945 B83-10352 04
- Predicting Thermal Conductivity
MFS-25732 B83-10400 06

INTEGRAL TRANSFORMATIONS

- Pseudo-Random Number Generators
MFS-27017 B83-10736 09

INTEGRATED CIRCUITS

- VLSI Unit for Two-Dimensional Convolutions
NPO-15224 B83-10136 02
- Test Pattern for IC's
NPO-15648 B83-10232 08
- Infrared-Responsive Monolithic MOS Circuit
GSC-12782 B83-10497 01
- Optical Testing of Integrated Circuits
MFS-25498 B83-10508 01
- Miniature Temperature-Control Circuit
LAR-12900 B83-10515 01

Hardware Fault Simulator Generates
Test Vectors For Complex IC's
NPO-15362 B83-10538 02
Processes for VLSI Circuits
MFS-25857 B83-10708 08

INTEGRATED ENERGY SYSTEMS
Electric-Power System Simulator
NPO-15515 B83-10288 02

INTEGRATORS
Servo Lead Compensation
MFS-19614 B83-10513 01

INTEGRITY
Deallocating Defective Space on
Winchester Disks
KSC-11287 B83-10534 02

INTERFACES
Two-Wire to Four-Wire Audio
Converter
KSC-11256 B83-10003 01

INTERFACIAL TENSION
Interface Instability During Crystal
Growth
MFS-25841 B83-10468 08

INTERFEROMETRY
Pairwise Comparison of Voltage
Sets
LAR-12929 B83-10256 01

Microfield Stress in Composite
Materials
MFS-25709 B83-10639 06

INTERGRANULAR CORROSION
Etchants for Some
Corrosion-Resistant Metals
MFS-25467 B83-10586 04

INTERPOLATION
Obtaining Runge-Kutta Solutions
Between Time Steps
MSC-20404 B83-10489 09

INTERPROCESSOR COMMUNICATION
Connecting Separate Computers to
a Common Bus
NPO-15433 B83-10289 02

INVENTORY MANAGEMENT
Shuttle Inventory Management
KSC-11219 B83-10124 09
Software Document Inventory
Program
GSC-12803 B83-10739 09

INVERTERS
Simplified High-Power Inverter
NPO-15961 B83-10499 01
Energy-Saving Inverter
NPO-15291 B83-10500 01
Controlling An Inverter-Driven
Three-Phase Motor
MFS-25215 B83-10510 01

INVISCID FLOW
Steady, Nonrotating, Blade-to-Blade
Potential Transonic Cascade Flow
Analysis Code
LEW-13854 B83-10189 06

ION CURRENTS
Ionic Refrigerator
NPO-15288 B83-10320 03

ION ENGINES
Ion Engine With Solid-Electrolyte Ion
Generator
NPO-15809 B83-10548 03

ION IMPLANTATION
Ion Accelerator Merges Several
Beams
NPO-15547 B83-10540 03
Less-Costly Ion Implantation of Solar
Cells
NPO-15511 B83-10699 08

ION SOURCES
Improved Hollow Cathode
NPO-15560 B83-10555 03

IRISES (MECHANICAL APERTURES)
Controlling TV-Camera f-Stop
Remotely
KSC-11269 B83-10550 03

IRRADIANCE
Solar-Collector Radiometer
NPO-14986 B83-10313 03

ISOLATORS
Predicting Noise in Complex Aircraft
Structures
LAR-13032 B83-10616 06

J

JACKETS
Light, Serviceable Insulation Blanket
MSC-20452 B83-10220 08

JET ENGINES
Reduced Aircraft-Engine Noise
LAR-12890 B83-10048 06

JIGS
Hole-Center Locating Tool
KSC-11248 B83-10412 07

Tool Enlarges Hard-to-Reach Holes
MFS-19789 B83-10413 07
Drilling Holes on a Large Bolt Circle
KSC-11115 B83-10434 07

Controlling Sanding Depth
MFS-19713 B83-10438 07
Bearing Measuring Fixture
MFS-19315 B83-10442 07

JOINTS (JUNCTIONS)
Self-Alining Quick-Connect Joint
LAR-12711 B83-10094 07

Reusable High-Pressure Connector
MSC-20339 B83-10097 07
Inspecting Joints With Grooved
Surfaces
MFS-25934 B83-10640 06

Joining Tubes With Adhesive
MFS-25958 B83-10700 08
Welding Tubes In Place
MFS-25714 B83-10723 08

K

KIDNEY DISEASES
Transducer Joint for Kidney-Stone
Ultrasonics
GSC-12652 B83-10166 05

KRAFT PROCESS (WOODPULP)
Monitoring Lignin Content in Paper
Processing
NPO-15796 B83-10350 04

L

LAMINAR FLOW
Boundary-Layer Equations for
Two-Dimensional and Axisymmetric
Flow
LAR-13015 B83-10080 06

LAMINATES
Elastomer-Modified Polyimides
ARC-11400 B83-10336 04

Panel Analysis and Sizing Code
LAR-13004 B83-10393 06

Better Thermal Insulation in
Solar-Array Laminators
NPO-15925 B83-10451 08
In Situ Composite Fastener
LAR-12939 B83-10463 08
Fabrication of Multi-Ply Birefringent
Fibrous Composite Laminates
LAR-12960 B83-10704 08

LANGUAGE PROGRAMMING
Software Specification Language
MFS-23737 B83-10244 09

LARGE SCALE INTEGRATION
Integrated Tactile Sensor for Robots
NPO-15094 B83-10610 06
Processes for VLSI Circuits
MFS-25857 B83-10708 08

LASER ANEMOMETERS
Optical Measurement of Particle Size
and Velocity
MFS-27036 B83-10554 03

LASER ANNEALING
Annealing Solar Cells With Lasers
NPO-15694 B83-10120 08

LASER APPLICATIONS
Detecting Methane Leaks
NPO-15790 B83-10329 04

LASER DOPPLER VELOCIMETERS
Autocovariance Computer
LAR-12968 B83-10615 06

LASER INTERFEROMETRY
Instrument Measures Airflow Friction
Without Contact
ARC-11354 B83-10047 06

LASER OUTPUTS
Scanning XeCl Laser
NPO-15692 B83-10307 03

Simplified Laser Tuning
NPO-15690 B83-10308 03
Laser-Beam Separator
NPO-15723 B83-10557 03

Measuring Delay in Lasers
NPO-15242 B83-10558 03

LASER PUMPING
Fluorine Mixer/Vaporizer for
Chemical Lasers
NPO-15552 B83-10311 03

LASER RANGE FINDERS
Self-Modulated Laser Rangefinder
GSC-12761 B83-10142 03

LASER SPECTROMETERS
IC Fabrication Methods Improve
Laser Diodes
LAR-13059 B83-10692 08

LASER SPECTROSCOPY
Scanning XeCl Laser
NPO-15692 B83-10307 03

LASERS
Measuring Excess Noise in SDL's
LAR-12938 B83-10004 01

Multiple-Wavelength Metal/Halide
Laser
NPO-15256 B83-10306 03

Controlling Metal-Halide Vapor
Density in Lasers
NPO-15021 B83-10310 03

Visual Alinement Technique for
Infrared LIDAR
NPO-15826 B83-10544 03

Laser Diode Schlieren Photography
LAR-12897 B83-10559 03
Modified Fabrication for InGaAsP
Strip Laser
LAR-12986 B83-10705 08

LATCHES
Latching Mechanism for Umbilical
Connectors
MSC-20242 B83-10096 07

- Spool-Valve Pressure-Difference
Regulator
MSC-20127 B83-10200 07
Retractable Rotating Door Latch
MSC-20304 B83-10201 07
Latch for Stored Cargo
MFS-25837 B83-10407 07
Self-Locating Latch
MFS-25956 B83-10446 07
- LATTICE VIBRATIONS**
Analyzing Vibrations in a Long Mast
MFS-25746 B83-10641 06
- LAUNCH WINDOWS**
Launch-Window Program
GSC-12801 B83-10628 06
- LAY-UP**
Frame Allines Fibers in Multilayer
Composites
MFS-25959 B83-10706 08
- LEAD ACID BATTERIES**
Manometer Measures Gas Flow
NPO-15686 B83-10178 06
- LEAKAGE**
Measuring Small Leak Holes
MSC-20113 B83-10063 06
Leak Tester for Cryogenic Flowlines
MSC-20233 B83-10174 06
Calculating Static-Seal Leakage
Correlation
MFS-19674 B83-10175 06
Theory for Eccentric and Misaligned
Annular Seals
MFS-19892 B83-10652 06
Temporary Sealing of Cavities for
Leak Testing
MFS-19646 B83-10680 07
- LEAST SQUARES METHOD**
Time-Domain Modal Vibration
Identification
LAR-12924 B83-10072 06
- LENS DESIGN**
Holographic Twyman-Green
Interferometer
NPO-15754 B83-10301 03
- LENSES**
Precise Measurement of Effective
Focal Length
GSC-12745 B83-10023 03
Beam Splitter Introduces Little
Aberration
NPO-15580 B83-10028 03
Multispectral Dual-Aperture Schmidt
Objective
GSC-12756 B83-10146 03
Tool Releases Optical Elements
From Spring Brackets
GSC-12794 B83-10380 06
- LEVITATION**
Attitude Control by Localized
Outgassing
NPO-15575 B83-10113 08
Acoustical-Levitation Chamber for
Metallurgy
NPO-15453 B83-10117 08
Acoustic Levitation With Less
Equipment
NPO-15562 B83-10118 08
Phase Modulation Varies Average
Acoustic Torque
NPO-15689 B83-10227 08
Electrostatic Levitator With Feedback
Control
NPO-15553 B83-10228 08
Gas-Bearing Crucible for Shot
Tower
NPO-15070 B83-10229 08
- Hollow-Sphere Production Line
NPO-15592 B83-10230 08
Interstitial Collimating Holes for
Gas-Levitation Microfurnace
MFS-25829 B83-10460 08
- LIFE (DURABILITY)**
Estimating the Lifetimes of
Nickel/Cadmium Cells
NPO-15145 B83-10576 04
- LIFE SUPPORT SYSTEMS**
Discharge Extracts Oxygen From
CO₂
ARC-11305 B83-10334 04
Nitrogen Supply Uses Hydrazine
ARC-11464 B83-10343 04
- LIFT**
Wing Subsonic Aerodynamic
Performance Estimates
LAR-12987 B83-10079 06
- LIFT AUGMENTATION**
Vortex Lift Augmentation by Suction
LAR-12969 B83-10071 06
- LIGHT AMPLIFIERS**
Concentrator-Enhanced Solar Array
NPO-15628 B83-10566 03
- LIGHT SCATTERING**
Submicron-Particle Generator
LAR-12785 B83-10646 06
- LIGHT TRANSMISSION**
Effect of Temperature on Fiber-Optic
Delay
NPO-15148 B83-10318 03
Stabilizing Fiber-Optic Transmission
Lines
NPO-15036 B83-10319 03
- LIGHTNING**
Lightning-Transient Recorder
NPO-15895 B83-10272 02
- LIGNIN**
Monitoring Lignin Content in Paper
Processing
NPO-15796 B83-10350 04
- LINE SPECTRA**
Catalog of Spectral Lines
NPO-15181 B83-10556 03
- LININGS**
Ribbed Coolant Liners for
Combustion Chambers
MFS-19829 B83-10696 08
- LIQUEFACTION**
Catalytic Coal Liquefaction With Iron
Sulfate
NPO-15727 B83-10589 04
- LIQUID COOLING**
Furnace for Rapid Heating and
Cooling
MFS-25707 B83-10597 04
Liquid-Droplet Radiative Cooler
MFS-25890 B83-10602 06
- LIQUID CRYSTALS**
Uncooled IR Detector
NPO-14832 B83-10265 01
- LIQUID FLOW**
Discriminating Between Liquid and
Gas Flows
NPO-15531 B83-10050 06
- LIQUID INJECTION**
Dispensing Small Measured Volumes
of Liquid
MFS-25690 B83-10056 06
- LIQUID LEVELS**
Level Sensor for Cryogenic Fluids
MSC-20302 B83-10009 01
Continuous-Reading Cryogen Level
Sensor
MFS-25873 B83-10611 06
- LIQUID NITROGEN**
Cooldown Strategy for Cryogenic
Wind Tunnels
LAR-13012 B83-10617 06
- LIQUID OXYGEN**
Liquid-Oxygen-Compatible Cement
for Gaskets
MFS-19797 B83-10466 08
Thermal and Flow Data From
Liquid-Oxygen System
KSC-11265 B83-10635 08
- LITHIUM HYDROXIDES**
Recycling Lithium Carbonate/Lithium
Hydroxide Waste
KSC-11261 B83-10033 04
- LOAD TESTING MACHINES**
Ball-and-Socket-Bearing Wear Test
MFS-19737 B83-10427 07
- LOAD TESTS**
Pull Test Verifies Gap Loading
MSC-20231 B83-10119 08
Stress-Corrosion Cracking in
Martensitic PH Stainless Steels
MFS-25400 B83-10342 04
- LOADS (FORCES)**
Improvements in Vibration-Analysis
Technique
MFS-25919 B83-10621 06
- LOCKING**
Locking Corners Speed Solar-Array
Frame Assembly
NPO-15750 B83-10697 08
- LOCKS (FASTENERS)**
Self-Locking Connector
MFS-19716 B83-10095 07
Lock for Tube Fittings
MFS-25964 B83-10440 07
- LOGIC CIRCUITS**
Detecting Solar-Cell Failures
NPO-15741 B83-10129 01
VLSI Unit for Two-Dimensional
Convolutions
NPO-15224 B83-10136 02
Detection of Floating Inputs in Logic
Circuits
LAR-13073 B83-10528 02
- LOGISTICS MANAGEMENT**
Latch for Stored Cargo
MFS-25837 B83-10407 07
- LOUDNESS**
Predicting Aircraft Noise Levels
LEW-13778 B83-10077 06
- LOW COST**
Planning Transport and
Manufacturing for Lowest Cost
NPO-15391 B83-10123 09
- LOW DENSITY MATERIALS**
Low-Density High-Strength Foamed
Materials
NPO-15411 B83-10575 04
- LOW GRAVITY MANUFACTURING**
Solidifying Bi/MnBi at Low Gravity
MFS-25736 B83-10044 04
- LOW NOISE**
Low-Noise Submillimeter-Wave
Diode
NPO-15935 B83-10498 01
- LOW TEMPERATURE TESTS**
Level Sensor for Cryogenic Fluids
MSC-20302 B83-10009 01
Sample Holder for Cryogenic
Adhesive Shear Test
MFS-25729 B83-10060 06
- LUBRICANTS**
Thermal Elastohydrodynamic
Lubrication of Spur Gears
LEW-13528 B83-10213 07

M

MACHINE TOOLS

- Machining Three Prongs on a Shaft
MFS-19729 B83-10099 07
Hole-Center Locating Tool
KSC-11248 B83-10412 07
Drilling Holes on a Large Bolt Circle
KSC-11115 B83-10434 07
Controlling Sanding Depth
MFS-19713 B83-10438 07
Measuring Recessed Pins
MFS-19673 B83-10439 07
Tube Alignment for Machining
MFS-19719 B83-10663 07
Transformer and Meter Tester
MFS-19708 B83-10681 07
Attaching Chuck Keys to Machine Tools
KSC-11249 B83-10684 07

MACHINING

- Electrochemical Deburring
MFS-19693 B83-10087 07
Tooling Converts Stock Bearings To Custom Bearings
LAR-12922 B83-10090 07
Drilling Precise Orifices and Slots
MSC-20053 B83-10091 07
Value-Engineering Review for Numerical Control
MFS-19664 B83-10480 08
Tube Alignment for Machining
MFS-19719 B83-10663 07

MAGNETIC MATERIALS

- Solidifying Bi/MnBi at Low Gravity
MFS-25736 B83-10044 04
Passive Magnetic Bearing
GSC-12726 B83-10085 07

MAGNETIC PERMEABILITY

- Automated Magnetic Susceptibility Analysis
MFS-25935 B83-10592 04

MAGNETOHYDRODYNAMIC

ORS

- Sialon Electrodes and Insulators for MHD Device
NPO-14945 B83-10352 04

MAINTENANCE

- Tool for Replacing Bushings
MSC-20282 B83-10209 07
Testing Bearings in Tight Spaces
MSC-20250 B83-10210 07
Repairing Damaged Power-Cable Insulation
KSC-11206 B83-10464 08

MAN ENVIRONMENT INTERACTIONS

- Control of Self-Replicating Systems
MFS-25865 B83-10494 09

MANAGEMENT ANALYSIS

- Control of Self-Replicating Systems
MFS-25865 B83-10494 09

MANAGEMENT

SYSTEMS

- Large-Scale Software Management System
KSC-11230 B83-10122 09
Forest Resource Information System
MSC-20270 B83-10245 09
Flow Chart for Management
NPO-15014 B83-10492 09

MANAGEMENT PLANNING

- Flow Chart for Management
NPO-15014 B83-10492 09

MANAGEMENT SYSTEMS

- A File Archival System
NPO-16274 B83-10735 09

MANEUVERABILITY

- The Mission Radius and Maneuverability Characteristics of Fighter Aircraft
LAR-12908 B83-10631 06

MANEUVERS

- Mathematical Simulation of Flight Maneuvers
NPO-15395 B83-10644 06

MANGANESE ALLOYS

- Solidifying Bi/MnBi at Low Gravity
MFS-25736 B83-10044 04

MANIFOLDS

- Holding Tubes in Place for Brazing
MFS-19658 B83-10211 07

MANIPULATORS

- Remote Manipulator Has Relistic 'Feel'
NPO-15065 B83-10083 07
Holder for Fragile Parts
MFS-25772 B83-10212 07
Three-Level Control of Manipulators
NPO-15048 B83-10493 09
Displaying Force and Torque of A Manipulator
NPO-15942 B83-10529 02

MANOMETERS

- Manometer Measures Gas Flow
NPO-15686 B83-10178 06

MANUALS

- Polymeric Applications in Electronics
NPO-16081 B83-10235 08

MANUFACTURING

- Quality-Planning-Requirements
ments
MSC-20280 B83-10233 08
Combined Silane Pyrolysis and Silicon-Particle Melt
NPO-15510 B83-10357 04
Low-Contamination Vibrating Feeder for Silicon Chips
NPO-15128 B83-10445 07
Sonic-Pump Levitator
MFS-25828 B83-10462 08

MAPPING

- Algorithm for Constructing Contour Plots
ARC-11441 B83-10490 09

MARKING

- Labeling Solar-Cell Modules
NPO-15997 B83-10454 08
Securing Identification Sleeving
MFS-19685 B83-10716 08

MARTENSITIC STAINLESS STEELS

- Stress-Corrosion Cracking in Martensitic PH Stainless Steels
MFS-25400 B83-10342 04

MATERIALS HANDLING

- Transporter for Treated Sheet Materials
MSC-20332 B83-10204 07
Fluid/Vapor Separator for Variable Flow Rates
ARC-11401 B83-10299 03
Shuttle-Car System for Continuous Mining
NPO-15949 B83-10418 07
Handling Fixture for Solar-Cell Arrays
NPO-15908 B83-10450 08
Off-Resonance Acoustic Levitation Without Rotation
NPO-15634 B83-10461 08
Containerless-Processing Module
NPO-14932 B83-10479 08

MECHANICAL MEASUREMENT

- Thermal and Flow Data From Liquid-Oxygen System
KSC-11265 B83-10635 06

MATERIALS RECOVERY

- Recycling Lithium Carbonate/Lithium Hydroxide Waste
KSC-11261 B83-10033 04
Generating SiF₄ From H₂SiF₆
NPO-15721 B83-10155 04
Recovering Zinc From Discarded Tires
NPO-16046 B83-10568 04
Cryogenic Separation of a Ceramic From Its Mandrel
LAR-12904 B83-10717 08

MATHEMATICAL MODELS

- Time-Domain Modal Vibration Identification
LAR-12924 B83-10072 06
Thermal Radiation Model
Renodalization
MSC-20348 B83-10073 06
Multivalued-Velocity-Field Model of Turbulence
NPO-15748 B83-10183 06
Dissociated Airflow Effects During Plasma-Arc Testing
MSC-20522 B83-10185 06
Steady, Nonrotating, Blade-to-Blade Potential Transonic Cascade Flow Analysis Code
LEW-13854 B83-10189 06

MEASURING INSTRUMENTS

- Measuring Excess Noise in SDL's
LAR-12938 B83-10004 01
Portable Pallet-Weighing Apparatus
GSC-12789 B83-10066 06
Circuitry for Angle Measurements
MFS-25825 B83-10137 02
Measuring Power Flow in Electric Vehicles
NPO-15514 B83-10138 02
Portable Data Logger for Photovoltaic Panels
NPO-15158 B83-10139 02
Measuring Surface-Shear Stress in a Wind Tunnel
ARC-11384 B83-10180 06
Pulse Response Yields Battery Charge State
NPO-14882 B83-10285 02
Measuring Coating Thickness
MFS-25633 B83-10398 06
Determining Frost Depth and Density
MFS-25754 B83-10403 06
Automated Magnetic Susceptibility Analysis
MFS-25935 B83-10592 04

MECHANICAL DEVICES

- Miniature Rotator
LAR-12765 B83-10675 07
Aligning Solder Pads on a Solar Cell
NPO-15298 B83-10732 08

MECHANICAL DRIVES

- Coaxial Redundant Drives
MFS-25171 B83-10197 07

MECHANICAL MEASUREMENT

- Eddy-Current Inspection of Narrow Metal Tubes
MFS-19742 B83-10374 06
Tool for Tightening Bolts With Knurled Heads
MFS-25694 B83-10436 07
Depth Gage for Threaded Holes
MFS-19884 B83-10672 07

MECHANICAL PROPERTIES

SUBJECT INDEX

MECHANICAL PROPERTIES

Freeze/Thaw Properties of Cellular Glass
NPO-15854 B83-10162 04

MEDICAL ELECTRONICS

Computer Analysis of Eye Blood-Vessel Images
NPO-15527 B83-10371 05

MEDICAL EQUIPMENT

Microprocessor-Based Wave Analyzer
ARC-11388 B83-10046 05

MELTING

Gas-Bearing Crucible for Shot Tower
NPO-15070 B83-10229 08

MELTS (CRYSTAL GROWTH)

Combined Silane Pyrolysis and Silicon-Particle Melt
NPO-15510 B83-10357 04
Cold-Crucible Premelter for Silicon
NPO-16050 B83-10457 08
Melt-Level Sensing in Silicon-Web Growth
NPO-15356 B83-10473 08

MEMBRANE STRUCTURES

High-Flow Asymmetric Reverse-Osmosis Membranes
ARC-11359 B83-10598 05

MEMBRANES

Characterizing Shear Properties of Membranes
MFS-25745 B83-10057 06
Self-Cleaning Tubular-Membrane Module
NPO-15245 B83-10100 07

MENISCI

Gas-Jet Meniscus Control in Ribbon Growth
NPO-14978 B83-10112 08

MERCURY VAPOR

Accelerated Solar-UV Test Chamber
NPO-15063 B83-10323 03

MESSAGE PROCESSING

Dual-Rate Transmission Reduces Weather Effects
NPO-15807 B83-10280 02

METAL COATINGS

Binder for Carbon-Fiber Coating
NPO-14988 B83-10579 04
Oxidation Protection for Thermocouples
NPO-15605 B83-10710 08

METAL CUTTING

Wire Electrical-Discharge Machining Aid
MFS-19643 B83-10686 07

METAL FATIGUE

Random Life Curves for Common Engineering Materials
MSC-20433 B83-10163 04

METAL FOAMS

Low-Density High-Strength Foamed Materials
NPO-15411 B83-10575 04

METAL MATRIX COMPOSITES

Directional Solidification of Monotectic Alloys
MFS-25767 B83-10157 04
Directional Solidification of Monotectic Alloys
MFS-25767 B83-10159 04

METAL OXIDE SEMICONDUCTORS

Test Pattern for IC's
NPO-15648 B83-10232 08

Infrared-Responsive Monolithic MOS Circuit
GSC-12782 B83-10497 01

METAL POWDER

Plated Metal Powders for Electrode Pastes
NPO-15161 B83-10360 04

METAL SHEETS

Reinforcement for Stretch Formed Sheet Metal
MSC-20228 B83-10108 08
Transporter for Treated Sheet Materials
MSC-20332 B83-10204 07
Surface-Moisture Monitoring Technique
NPO-15494 B83-10389 06
Air Guide for Sheet-Metal Grinder
MFS-19788 B83-10423 07

METAL SHELLS

Fabrication of Hollow Spheres
NPO-15798 B83-10467 08
Shielding Electric Connectors From Lightning
NPO-15688 B83-10511 01

METAL SPRAYING

Reinforcement for Stretch Formed Sheet Metal
MSC-20228 B83-10108 08

METAL WORKING

Bender/Coiler for Tubing
MSC-20410 B83-10206 07
Microfissuring in Nickel-Based-Alloy Welds
MFS-25815 B83-10340 04
Containerless Solidification of Amorphous Metals
NPO-15776 B83-10570 04

METAL-WATER REACTIONS

Stress-Corrosion Cracking in Martensitic PH Stainless Steels
MFS-25400 B83-10342 04

METALLIC GLASSES

Producing Metallic Glasses With Acoustic Levitation
NPO-15658 B83-10231 08
Hollow Spheres of Metallic Glass
NPO-15991 B83-10583 04

METALS

Measuring Elastic Modulus of Sintered Metal
NPO-15589 B83-10055 06
Acoustical-Levitation Chamber for Metallurgy
NPO-15453 B83-10117 08
Memory-Metal Electromechanical Actuators
NPO-15960 B83-10661 07

METEOROLOGICAL INSTRUMENTS

Lightning-Transient Recorder
NPO-15895 B83-10272 02

METHANE

Detecting Methane Leaks
NPO-15790 B83-10329 04

MICROCOMPUTERS

Extending the Memory of Microcomputers
NPO-15295 B83-10282 02

MICROELECTRONICS

Standards for Epoxies Used in Microelectronics
MFS-25810 B83-10042 04
Measuring Tension in Transistor Suspensions
NPO-15677 B83-10128 01

Low-Cost Alternatives in Hybrid Microcircuit Packaging
MFS-25809 B83-10236 08

MICROFILMS

Removing Images From Microfilm
NPO-15146 B83-10353 04

MICROMETERS

Measuring Recessed Pins
MFS-19673 B83-10439 07

MICROORGANISMS

Flowthrough Bacteria-Detection System
LAR-12871 B83-10164 05

MICROPARTICLES

Submicron-Particle Generator
LAR-12785 B83-10646 06

MICROPROCESSORS

Microcomputer Multiplexes Alphanumeric Labels on CRT's
MSC-20079 B83-10132 02

MICROSCOPES

Sharp-Focus Composite Microscope Imaging by Computer
NPO-15207 B83-10167 05

MICROSTRIP TRANSMISSION LINES

Stripline Antenna Beam-Forming Network
NPO-15743 B83-10503 01

MICROWAVE ANTENNAS

Fabricating Slotted-Waveguide Arrays From Sheet Metal
NPO-15664 B83-10214 08

MICROWAVE RADIOMETERS

Determining the Nonlinearity of Microwave Receivers
NPO-15355 B83-10536 02

MICROWAVE SENSORS

Searching for Clear-Air Turbulence
NPO-15351 B83-10016 02

MICROWAVE SWITCHING

Automatic Phasing for Active Antenna Elements
NPO-15920 B83-10524 02

MICROWAVES

Transmitting Electromagnetic Energy into Liquids
NPO-15868 B83-10266 01
Microwave Radiation Detector
NPO-15932 B83-10325 03

MICROYIELD STRENGTH

Microyield Stress in Composite Materials
MFS-25709 B83-10639 06

MILK

Drying Milk With Boiler Exhaust
NPO-15923 B83-10297 03

MILLING (MACHINING)

Machining Three Prongs on a Shaft
MFS-19729 B83-10099 07

MINERAL EXPLORATION

Unmanned Instrument Platform for Undersea Exploration
NPO-15878 B83-10526 02

MINES (EXCAVATIONS)

Automated Coal-Mine Shuttle Car
NPO-15850 B83-10417 07
Shuttle-Car System for Continuous Mining
NPO-15949 B83-10418 07
Mechanical Coal-Face Fracturer
NPO-15847 B83-10419 07
Continuous Mining Machine
NPO-15164 B83-10430 07
Roof Support Near Coal-Mining Face
NPO-15165 B83-10431 07

MINIATURE ELECTRONIC EQUIPMENT

Miniature Temperature-Control
Circuit
LAR-12900 B83-10515 01

MINIATURIZATION

Miniature Airflow Sensor
LAR-13065 B83-10603 06

MINING

Instrumented Pick Detects
Coal/Rock Interface
MFS-25753 B83-10065 06
Bidirectional Continuous Coal Miner
NPO-15166 B83-10432 07
Miner for Cutting Entry Passages in
Coal Seams
NPO-15167 B83-10433 07
Display for Mining-Machine
Operators
MFS-25955 B83-10535 02

MIRRORS

Normal-Incidence Soft-X-Ray Mirror
NPO-15828 B83-10145 03
Torque Compensator for Mirror
Mountings
GSC-12742 B83-10169 06
Forming Mirrors on Composite
Materials
NPO-15912 B83-10215 08
Evaluation of Structural Cellular
Glass
NPO-15680 B83-10339 04
Isolating Supports for X-Ray Mirrors
MFS-25904 B83-10386 06
Lightweight Metal Mirrors
GSC-12743 B83-10448 08
Foil Panel Mirrors for Nonimaging
Applications
GSC-12751 B83-10449 08
Concentrator-Enhanced Solar Array
NPO-15628 B83-10566 03
Pressure/Vacuum Bonding for
Low-Curvature Mirrors
NPO-15613 B83-10718 08

MISALIGNMENT

Flexible Coupling for Angle
Transducer
NPO-15412 B83-10064 06

MISSION PLANNING

Launch-Window Program
GSC-12801 B83-10628 06
The Mission Radius and
Maneuverability Characteristics of
Fighter Aircraft
LAR-12908 B83-10631 06
Research and Development Mission
Analysis System
GSC-12847 B83-10741 09

MIXING

Continuous Monitoring of Melt
Composition
NPO-15896 B83-10574 04

MODULATION

Radio-Frequency and Wideband
Modulation Arraying
NPO-15030 B83-10283 02

MODULATORS

Flip-Flop Digital Modulator
MSC-20334 B83-10505 01

MODULUS OF ELASTICITY

Measuring Elastic Modulus of
Sintered Metal
NPO-15589 B83-10055 06

MOISTURE CONTENT

Predicting Moisture Absorption in
Composite Materials
MSC-20109 B83-10337 04

Surface-Moisture Monitoring
Technique
NPO-15494 B83-10389 06

MOISTURE RESISTANCE

Rewaterproofing Silica Tiles
MSC-20340 B83-10111 08
Preventing Moisture Damage To
Solar Panels
NPO-15481 B83-10477 08

MOLDS

Process for Molding Nonreinforced
(Neat) Resins
LAR-12981 B83-10038 04
Checking Surface Contours
MSC-20318 B83-10052 06
Tool for Taking Clay Impressions
MFS-19728 B83-10435 07

MOLECULAR BEAM EPITAXY

IC Fabrication Methods Improve
Laser Diodes
LAR-13059 B83-10692 08

MOLECULAR BEAMS

Improved Electrostatic Optical
System
NPO-15774 B83-10302 03

MONITORS

Detecting Solar-Cell Failures
NPO-15741 B83-10129 01
Improved 02/H₂ Gas Mixture
Sensor
MSC-20408 B83-10156 04
Electronic Force Gage for Welders
MFS-25798 B83-10172 06
Status Panel For Video Cassette
Recorders
KSC-11254 B83-10532 02

MONOTECTIC ALLOYS

Directional Solidification of
Monotectic Alloys
MFS-25767 B83-10157 04
Directional Solidification of
Monotectic Alloys
MFS-25767 B83-10159 04

MONTE CARLO METHOD

Monte Carlo Investigation of
Trajectories
GSC-12705 B83-10074 06
Pseudo-Random Number
Generators
MFS-27017 B83-10736 09

MOTION SIMULATORS

Task Board Tests Manipulator
Performance
NPO-15150 B83-10070 06

MOTORS

Reciprocating Linear Electric Motor
GSC-12773 B83-10421 07

MOUNTING

Torque Compensator for Mirror
Mountings
GSC-12742 B83-10169 06
Shock Mounting for Heavy Machines
MFS-25888 B83-10420 07
Decoupling a Reflecting Layer From
Its Support Structure
NPO-15346 B83-10486 08
Low-Thermal-Resistance Baseplate
Mounting
MFS-25908 B83-10613 06
Internally Mounting Strain Gages
GSC-12824 B83-10618 06
Installation/Removal Tool for
Screw-Mounted Components
MSC-20606 B83-10667 07

MULTIPLEXING

Microcomputer Multiplexes
Alphanumeric Labels on CRT's
MSC-20079 B83-10132 02
MULTISPECTRAL BAND SCANNERS
Improved Infrared Multispectral
Scanner
NPO-16143 B83-10552 03

N**NAVIER-STOKES EQUATION**

Code Solves Three-Dimensional
Navier-Stokes Equations
LAR-12962 B83-10075 06

NAVIGATION AIDS

Determining Aircraft Altitude
NPO-15386 B83-10402 06

NERVES

Microprocessor-Based
Wave Analyzer
ARC-11388 B83-10046 05

NETWORK CONTROL

Solid-State Crossbar Switch
NPO-15066 B83-10259 01

NEURONS

Microprocessor-Based
Wave Analyzer
ARC-11388 B83-10046 05

NEUTRON ACTIVATION ANALYSIS

Neutron Probe of Building-Wall
Composition
GSC-12808 B83-10541 03

NEWTON-RAPHSON METHOD

Harmonic-Balance Algorithm for
Nonlinear Systems
MFS-25821 B83-10239 09

NICKEL ALLOYS

Microfissuring in Nickel-Based-Alloy
Welds
MFS-25815 B83-10340 04
Hot Microfissuring in Nickel Alloy
MFS-25763 B83-10587 04

NICKEL CADMIUM BATTERIES

Measuring Elastic Modulus of
Sintered Metal
NPO-15589 B83-10055 06
Estimating the Lifetimes of
Nickel/Cadmium Cells
NPO-15145 B83-10576 04

NICKEL PLATE

Plasma-Sprayed Copper Tie-In for
Nickel Plating
MFS-19481 B83-10584 04

NIOBIUM ALLOYS

X-Ray-Diffraction Analysis of Nb/Ge
Alloys
MFS-27038 B83-10594 04

NITROGEN

Nitrogen Supply Uses Hydrazine
ARC-11464 B83-10343 04

NOISE INTENSITY

Predicting Aircraft Noise Levels
LEW-13778 B83-10077 06

NOISE MEASUREMENT

Measuring Excess Noise in SDL's
LAR-12938 B83-10004 01
Noise Control in Propeller-Driven
Aircraft
LAR-12954 B83-10049 06

NOISE PREDICTION

Estimating Effects of Flicker Noise in
Clock Signals
NPO-15525 B83-10537 02

NOISE REDUCTION

- Controlling Industrial Noise
 LAR-13001 B83-10030 03
 Reduced Aircraft-Engine Noise
 LAR-12890 B83-10048 06
 Predicting Noise in Complex Aircraft Structures
 LAR-13032 B83-10616 06
 Takeoff and Landing of Transport Aircraft
 LAR-13086 B83-10633 06
- NONDESTRUCTIVE TESTS**
 Dielectric Scanning Locates Voids in Glass Foam
 NPO-15728 B83-10176 06
 Detecting Defective Solder Bonds
 MFS-25507 B83-10260 01
 Contactless Measurement of Physical Properties
 NPO-15839 B83-10296 03
 Eddy-Current Inspection of Narrow Metal Tubes
 MFS-19742 B83-10374 06
 Liquid-Nitrogen Test for Blocked Tubes
 MFS-19762 B83-10382 06
 Optical Testing of Integrated Circuits
 MFS-25498 B83-10508 01
 Paint-Thickness Checker
 KSC-11270 B83-10520 01
- NONLINEAR EQUATIONS**
 Harmonic-Balance Algorithm for Nonlinear Systems
 MFS-25821 B83-10239 09
- NONLINEARITY**
 Determining the Nonlinearity of Microwave Receivers
 NPO-15355 B83-10536 02
- NOZZLE DESIGN**
 Supersonic-Nozzle Shock-Wave Analysis
 MFS-19753 B83-10656 06
 Nonseparating High-Area-Ratio Supersonic Nozzles
 MFS-19758 B83-10657 06
- NOZZLE FLOW**
 Code Solves Three-Dimensional Navier-Stokes Equations
 LAR-12962 B83-10075 06
- NOZZLE GEOMETRY**
 Proposed Short-Throat Supersonic Nozzles
 MFS-19759 B83-10067 06
 Evaporation Tower With Prill Nozzles
 NPO-15609 B83-10322 03
 Suppressing Transient Side Loads in Supersonic Nozzles
 MFS-19769 B83-10379 06
- NUMERICAL ANALYSIS**
 Harmonic-Balance Algorithm for Nonlinear Systems
 MFS-25821 B83-10239 09
- NUMERICAL CONTROL**
 Drilling Precise Orifices and Slots
 MSC-20053 B83-10091 07
 Value-Engineering Review for Numerical Control
 MFS-19664 B83-10480 08
- NUMERICAL DIFFERENTIATION**
 Obtaining Runge-Kutta Solutions Between Time Steps
 MSC-20404 B83-10489 09
- NUTS (FASTENERS)**
 Air-Lubricated Lead Screw
 NPO-15617 B83-10101 07

O

O RING SEALS

- Barrier Self for Hydraulic Actuators
 MSC-20390 B83-10655 06
 Double-Poppet Valve
 MSC-20627 B83-10669 07

OHMIC DISSIPATION

- Electrical Dissipation Measurement of Polymer Phase Transitions
 LAR-12861 B83-10053 06

OIL RECOVERY

- Extracting Oil From Tar Sands
 NPO-15760 B83-10349 04
 Transportable Pumps Could Save Oil Cargoes
 MFS-25881 B83-10660 07

OPENINGS

- Gage Measures Recessed Gaps
 MSC-20230 B83-10089 07

OPERATING TEMPERATURE

- Determining Solar-Cell Operating Temperature
 NPO-15449 B83-10010 01

OPERATIONAL AMPLIFIERS

- Error-Compensated Integrate and Hold
 ARC-11303 B83-10255 01

OPERATIONS RESEARCH

- Thermal and Flow Data From Liquid-Oxygen System
 KSC-11265 B83-10635 06

OPTICAL COMMUNICATION

- Grating Demultiplexers for Optical Signals
 LAR-12748 AND LAR-12749 B83-10147 03

- Efficient Coding for Optical Communication
 NPO-15856 B83-10734 09

OPTICAL COUPLING

- Fabricating Grating Couplers on Optical Fibers
 MSC-20286 B83-10019 03
 Polymer Bonding of Optical Fibers
 NPO-15464 B83-10224 08

OPTICAL DATA PROCESSING

- Pairwise Comparison of Voltage Sets
 LAR-12929 B83-10256 01

OPTICAL EQUIPMENT

- Precise Measurement of Effective Focal Length
 GSC-12745 B83-10023 03
 Beam Splitter Introduces Little Aberration
 NPO-15580 B83-10028 03

- Multispectral Dual-Aperture Schmidt Objective
 GSC-12756 B83-10146 03

- Torque Compensator for Mirror Mountings
 GSC-12742 B83-10169 06

- Tool Releases Optical Elements From Spring Brackets
 GSC-12794 B83-10380 06

- Laser-Beam Separator
 NPO-15723 B83-10557 03

OPTICAL MEASUREMENT

- Holographic Twyman-Green Interferometer
 NPO-15754 B83-10301 03

OPTICAL MEASURING INSTRUMENTS

- Focal-Plane-Array Optical Proximity Sensors
 NPO-15155 B83-10017 01

Submillisecond Optical Knife-Edge Testing

- GSC-12740 B83-10025 03
 Optical Turbopump Speed Sensor
 MFS-19794 B83-10651 06

OPTICAL PROPERTIES

- Containerless Processing of Advanced Glasses
 MFS-27002 B83-10581 04

OPTICAL RADAR

- Visual Alinement Technique for Infrared LIDAR
 NPO-15826 B83-10544 03

OPTICAL SCANNERS

- Lensless Scanning Telescope
 LAR-12648 B83-10022 03
 Optical Testing of Integrated Circuits
 MFS-25498 B83-10508 01

OPTICAL TRACKING

- Imaging Bubble Formation in a Drop Tube
 NPO-15114 B83-10324 03

OPTICAL TRANSITION

- Multiple-Wavelength Metal/Halide Laser
 NPO-15256 B83-10306 03

OPTICAL WAVEGUIDES

- Optical-Fiber-to-Channel-Waveguide Coupler
 NPO-15555 B83-10029 03
 Polymer Bonding of Optical Fibers
 NPO-15464 B83-10224 08

OPTIMIZATION

- General Aviation Synthesis Program
 ARC-11434 B83-10396 06
 System for Structural Synthesis Combines Finite-Element Analysis and Optimization Programs
 LAR-13046 B83-10623 06

ORAL HYGIENE

- Acoustic Tooth Cleaner
 LAR-12471 B83-10367 05

ORBIT MANEUVERING ENGINE (SPACE SHUTTLE)

- General Maneuver Program
 GSC-12802 B83-10630 06

ORBITS

- Elliptical Orbit Performance Computer Program
 LAR-13026 B83-10632 06

ORCHARDS

- Frost Forecasting for Fruitgrowers
 KSC-11241 B83-10243 09

ORIFICES

- Drilling Precise Orifices and Slots
 MSC-20053 B83-10091 07

OSCILLATION DAMPERS

- Segmented Tubular Seat Springs
 ARC-11349 B83-10422 07

OSCILLOGRAPHS

- Modified Oscillograph for Impacting Composite Materials
 MFS-25901 B83-10406 06

OUTGASSING

- Contactless Measurement of Physical Properties
 NPO-15839 B83-10296 03

OXIDATION RESISTANCE

- Oxidation-Resistant Slurry Coating for Carbon-Based Materials
 LEW-13951 B83-10572 04

P

PACKAGING

- Better Seals for Vacuum Bags
MFS-25875 B83-10216 08
- Low-Cost Alternatives in Hybrid Microcircuit Packaging
MFS-25809 B83-10236 08
- Packaging Nuclear and Chemical Waste for Disposal
NPO-15454 B83-10348 04

PACKINGS (SEALS)

- Damping Seals for Turbomachinery
MFS-25834 B83-10437 07

PANEL METHOD (FLUID DYNAMICS)

- PANEL Code for Planar Cascades
LEW-13862 B83-10190 06

PANELS

- J-Channel Locks Potting to Compression Panel
LAR-12913 B83-10179 06
- General-Purpose Icosahedral Structure
GSC-12854 B83-10612 06

PAPER (MATERIAL)

- Monitoring Lignin Content in Paper Processing
NPO-15796 B83-10350 04

PARABOLIC REFLECTORS

- Fuse Protects Parabolic-Dish Solar Collector
NPO-15662 B83-10148 03
- Parabolic Solar Collectors
NPO-15674 B83-10564 03

PARABOLOID MIRRORS

- Testing Large Solar Mirrors
NPO-15404 B83-10294 03

PARTICLE EMISSION

- Diesel Particulate Destruction
NPO-15426 B83-10346 04

PARTICLE FLUX DENSITY

- Charged Particle Flux Sensor
MFS-25461 B83-10021 03

PARTICLE PRODUCTION

- Submicron-Particle Generator
LAR-12785 B83-10646 06

PARTICLE SIZE DISTRIBUTION

- Optical Measurement of Particle Size and Velocity
MFS-27036 B83-10554 03

PARTICULATES

- Diesel Particulate Destruction
NPO-15426 B83-10346 04

PATTERN RECOGNITION

- Binary Correlator for Electromagnetic Signal Patterns
GSC-12714 B83-10275 02

PAYLOADS

- Methods for Estimating Payload/Vehicle Design Loads
NPO-15550 B83-10184 06

PEAT

- Dewatering Peat With Activated Carbon
NPO-15113 B83-10365 04

PELLETS

- Ultrasonics and Optics Would Control Shot Size
NPO-15608 B83-10107 08
- Gas-Bearing Crucible for Shot Tower
NPO-15070 B83-10229 08
- Hollow-Sphere Production Line
NPO-15592 B83-10230 08
- Ice as an Abrading Agent
MFS-19837 B83-10693 08

PERFORMANCE PREDICTION

- Off-Design Turbine Modeling
LEW-13674 B83-10195 06
- Modeling of Solar Concentrators
NPO-15034 B83-10562 03

PERFORMANCE TESTS

- Equations for Automotive-Transmission Performance
NPO-15825 B83-10410 07

PHASE CONTROL

- Automatic Phasing for Active Antenna Elements
NPO-15920 B83-10524 02

PHASE DETECTORS

- Phase Detector for Power-Factor Controller
MFS-25854 B83-10248 01
- Power-Factor Controller With Fast Load Response
MFS-25852 B83-10249 01

PHASE LOCKED SYSTEMS

- Heart-Rate and Breath-Rate Monitor
MSC-20078 B83-10045 05

PHASE MODULATION

- Frequency-Diversity Reception for Phase Modulation
NPO-15040 B83-10290 02
- Phase Modulation Stops Levitated Sample Rotation
NPO-16002 B83-10707 08

PHASE SHIFT CIRCUITS

- Digital Phase-Shift Standard
KSC-11250 B83-10001 01

PHASE TRANSFORMATIONS

- Electrical Dissipation Measurement of Polymer Phase Transitions
LAR-12861 B83-10053 06

PHASED ARRAYS

- Detecting Deformations in Phased-Array Antennas
NPO-15390 B83-10523 02

PHOTOCONDUCTORS

- Infrared-Responsive Monolithic MOS Circuit
GSC-12782 B83-10497 01

PHOTOELECTRIC CELLS

- Schottky-Barrier Photocell With Intermediate Metal Layer
GSC-12816 B83-10501 01
- Automated Assembly of Solar Panels
NPO-16206 B83-10729 08

PHOTOELECTRIC EMISSION

- Measuring Excess Noise in SDL's
LAR-12938 B83-10004 01

PHOTOELECTRIC MATERIALS

- Silicon Nitride Antireflection Coatings for Photovoltaic Cells
ARC-11447 B83-10332 04

PHOTOELECTRICITY

- Photovoltaic Roofs
NPO-15881 B83-10453 08

PHOTOELECTROCHEMICAL DEVICES

- Determining the Point of Zero Zeta Potential in Solid Samples
LAR-12893 B83-10026 03

PHOTOGRAPHIC FILM

- Preserving Color in Developed Photographic Film
MFS-23250 B83-10037 04

PHOTOLITHOGRAPHY

- Removing Images From Microfilm
NPO-15146 B83-10353 04
- IC Fabrication Methods Improve Laser Diodes
LAR-13059 B83-10692 08

PHOTOMASKS

- Processes for VLSI Circuits
MFS-25857 B83-10708 08

PHOTOMICROGRAPHS

- Sharp-Focus Composite Microscope Imaging by Computer
NPO-15207 B83-10167 05

PHOTORECONNAISSANCE

- Telemetry Speeds Forest-Fire Control
ARC-11438 B83-10279 02

PHOTOVOLTAIC CELLS

- Developing Standards for Photovoltaic Devices
NPO-15734 B83-10130 01
- Compact Concentrators for Solar Cells
MFS-25511 B83-10293 03
- Designing Flat-Plate Photovoltaic Arrays
NPO-15729 B83-10305 03
- Effects of Outdoor Soiling on Photovoltaic Modules
NPO-15186 B83-10317 03
- Silicon Nitride Antireflection Coatings for Photovoltaic Cells
ARC-11447 B83-10332 04
- Modeling of Solar Concentrators
NPO-15034 B83-10562 03
- Optimizing Grid Patterns on Photovoltaic Cells
NPO-15841 B83-10709 08
- Terminal System for Photovoltaic Arrays
NPO-15739 B83-10733 08

PHYSICAL PROPERTIES

- Contactless Measurement of Physical Properties
NPO-15839 B83-10296 03

PIERCING

- Portable Power Broach
MFS-19679 B83-10678 07

PIEZOELECTRIC CRYSTALS

- Portable Fatigue-Testing Machine
MFS-19459 B83-10649 06

PINHOLE CAMERAS

- Improved Gamma-and X-Ray Pinhole Camera
GSC-12851 B83-10539 03

PINHOLES

- Temporary Sealing of Cavities for Leak Testing
MFS-19646 B83-10680 07

PIPE FLOW

- Liquid-Nitrogen Test for Blocked Tubes
MFS-19762 B83-10382 06

PIPES (TUBES)

- Expander for Thin-Wall Tubing
MFS-19739 B83-10203 07
- Bender/Coiler for Tubing
MSC-20410 B83-10206 07
- Holding Tubes in Place for Brazing
MFS-19658 B83-10211 07
- Eddy-Current Inspection of Narrow Metal Tubes
MFS-19742 B83-10374 06
- Liquid-Nitrogen Test for Blocked Tubes
MFS-19762 B83-10382 06

PISTON ENGINES

- Reciprocating Linear Electric Motor
GSC-12773 B83-10421 07

PIVOTS

- Plastic Clamp Retains Clevis Pin
MFS-19747 B83-10207 07

PLANETARY MAPPING

High-Resolution X-Ray Telescope
NPO-15971 B83-10551 03

PLASMA ARC WELDING

Automated Variable-Polarity
Plasma-Arc Welding
MFS-27042 B83-10722 08

PLASMA JETS

Dissociated Airflow Effects During
Plasma-Arc Testing
MSC-20522 B83-10185 06

PLASMA PROPULSION

Plasma-Sprayed Copper Tie-In for
Nickel Plating
MFS-19481 B83-10584 04

PLASMA SPRAYING

Conductive Plasma-Sprayed
Coatings
NPO-15927 B83-10595 04

PLASTIC COATINGS

Polymeric Applications in Electronics
NPO-16081 B83-10235 08

PLASTICS

Process for Molding Nonreinforced
(Neat) Resins
LAR-12981 B83-10038 04
Polymeric Applications in Electronics
NPO-16081 B83-10235 08

PLATING

Electrodeposition Repair of Damaged
Metal Parts
MFS-19783 B83-10221 08
Plated Metal Powders for Electrode
Pastes
NPO-15161 B83-10360 04
Portable Plating System
MFS-19631 B83-10483 08

PLOTTERS

Hidden-Line Computer Code
ARC-11446 B83-10491 09

PLUGS

Terminal System for Photovoltaic
Arrays
NPO-15739 B83-10733 08

POINTING CONTROL SYSTEMS

Tracking Visible Targets
Automatically
NPO-15226 B83-10642 06

POISONS

Destroying Toxic Wastes
NPO-15655 B83-10582 04

POLLUTION CONTROL

Diesel Particulate Destruction
NPO-15426 B83-10346 04
Reducing Soot in Diesel Exhaust
NPO-15715 B83-10355 04
Three-Zone Catalyst Resists Sulfur
Poisoning
NPO-14827 B83-10356 04

POLYCRYSTALS

Measuring Diffusion and
Recombination in Polycrystalline
Silicon
NPO-15601 B83-10039 04

POLYIMIDES

Aromatic Polyimides With Group VI
Linkages
LAR-12980 B83-10031 04
Elastomer-Modified Polyimides
ARC-11400 B83-10336 04

POLYMER MATRIX COMPOSITES

Cracks in Glass Polymers Induced by
Solvent Absorption
NPO-15072 B83-10161 04

POLYMERIC FILMS

Airlock Entry
NPO-15415 B83-10720 08

POLYMERIZATION

Polycarbosilazane-Resin
on Process
MFS-25758 B83-10330 04

POLYMERS

Aromatic Polyimides With Group VI
Linkages
LAR-12980 B83-10031 04
Electrical Dissipation Measurement of
Polymer Phase Transitions
LAR-12861 B83-10053 06

POLYTETRAFLUOROETHYLENE

Fire-Resistant TFE Extrusions
MFS-25917 B83-10577 04

POLYURETHANE FOAM

Polyurethane Filler for Electroplating
MFS-19851 B83-10695 08

POLYVINYL ALCOHOL

In Situ Cross-Linking of Polyvinyl
Alcohol Films
LEW-13135 B83-10578 04

PONDS

Solar-Pond Resources in the United
States
NPO-15681 B83-10150 03

PORTABLE EQUIPMENT

Portable Pallet-Weighing Apparatus
GSC-12789 B83-10066 06
Portable X-Y Scanner
MFS-25687 B83-10411 07
Portable Plating System
MFS-19631 B83-10483 08
Portable Fatigue-Testing Machine
MFS-19459 B83-10649 06
Transportable Pumps Could Save Oil
Cargoes
MFS-25881 B83-10660 07
Portable Power Broach
MFS-19679 B83-10678 07

POSITION INDICATORS

Determining Aircraft Altitude
NPO-15386 B83-10402 06
Display for Mining-Machine
Operators
MFS-25955 B83-10535 02

POSITIONING DEVICES (MACHINERY)

Coil Welding Aid
MSC-20470 B83-10088 07
Holder for Fragile Parts
MFS-25772 B83-10212 07
Portable X-Y Scanner
MFS-25687 B83-10411 07
Tool Support Ring
MFS-19765 B83-10665 07
Miniature Rotator
LAR-12765 B83-10675 07
Positioning Vise for Crystal
Cleavage
GSC-12762 B83-10701 08
Frame Allines Fibers in Multilayer
Composites
MFS-25959 B83-10706 08

POTTING COMPOUNDS

J-Channel Locks Potting to
Compression Panel
LAR-12913 B83-10179 06
Repairable Encapsulated Electronic
Modules
NPO-15079 B83-10703 08

POWDER METALLURGY

Predicting Sintered-Metal Resistivity
From Porosity
NPO-15587 B83-10158 04

POWER CONDITIONING

Phase Detector for Power-Factor
Controller
MFS-25854 B83-10248 01

Power-Factor Controller With Fast
Load Response
MFS-25852 B83-10249 01
Programmable Power Conditioner
MFS-25531 B83-10270 01

POWER LINES

Shielded Aluminum Flat-Conductor
Cable
MFS-25899 B83-10250 01
Repairing Damaged Power-Cable
Insulation
KSC-11206 B83-10464 08

POWER SUPPLIES

Improved High-Current Drive Circuit
NPO-14938 B83-10269 01

POWER SUPPLY CIRCUITS

Electronic-Power-Transformer Design
Guide
LEW-13208 B83-10131 01

PREBURNERS

Radial-Cascade Analysis
MFS-19752 B83-10391 06
Ribbed Coolant Liners for
Combustion Chambers
MFS-19829 B83-10696 08

PREDICTION ANALYSIS TECHNIQUES

Calculating Static-Seal Leakage
Correlation
MFS-19674 B83-10175 06
Transonic, Axisymmetric Flow Over
Nozzle Afterbodies With Supersonic Jet
Exhausts
LAR-12957 B83-10187 06
Compressible Stability Analysis Code
For Transition Prediction in Three
Dimensional Boundary Layers
LAR-13042 B83-10188 06
Least-Squares Prediction of Solar
Activity
MFS-25870 B83-10303 03
Predicting Moisture Absorption in
Composite Materials
MSC-20109 B83-10337 04

PRESENTATION

Automatic Control of Multimedia
Shows
KSC-11080 B83-10286 02

PRESSURE DISTRIBUTION

Internally Mounting Strain Gages
GSC-12824 B83-10618 06

PRESSURE EFFECTS

Pressure-Driven Waterflow Cleaning
Device
MFS-19638 B83-10679 07

PRESSURE GAGES

Electronically-Scanned Pressure
Sensors
ARC-11361 B83-10387 06

PRESSURE MEASUREMENT

Measuring Small Leak Holes
MSC-20113 B83-10063 06
Reusable High-Pressure Connector
MSC-20339 B83-10097 07
Membrane Switches Check Seal
Pressure
MSC-20468 B83-10373 06

PRESSURE REDUCTION

Pressure Reducer for Coal Gasifiers
NPO-15100 B83-10084 07

PRESSURE REGULATORS

Remotely-Adjustable
of Valve
NPO-15693 B83-10404 06

PRESSURE SENSORS

Continuous-Reading Cryogen Level
Sensor
MFS-25873 B83-10611 06

SUBJECT INDEX

PRESSURE SUITS

Leak Test for Pressure-Sealing
Zippers
KSC-11247 B83-10654 06

PRESSURE VESSELS

Dispensing Small Measured Volumes
of Liquid
MFS-25690 B83-10056 06
Feedthrough Seal For High-Pressure
Vessel
MSC-20625 B83-10502 01
Strain Analysis of Graphite/Epoxy
Vessels
MFS-27018 B83-10714 08

PREVENTION

Fire-Resistant TFE Extrusions
MFS-25917 B83-10577 04

PRINTED CIRCUITS

Probe Array for Testing
Printed-Circuit Substrates
GSC-12759 B83-10059 06

PROBLEM SOLVING

Solutions of Transonic Flow in
Turbomachines
LEW-13896 B83-10186 06

PROCESS CONTROL (INDUSTRY)

Toroidal Ellipsoid Float-Zone Heater
MFS-25771 B83-10711 08

PROCESSES

Perfluoroalkylene-Ether Triazine
Elastomers
ARC-11402 B83-10335 04

PROCUREMENT MANAGEMENT

Shuttle Inventory Management
KSC-11219 B83-10124 09

PRODUCT DEVELOPMENT

Rapid Circuit Breadboarding
MFS-25761 B83-10470 08

PRODUCTION ENGINEERING

One-Step Coal Liquefaction
NPO-15891 B83-10326 04
Cold-Crucible Premelter for Silicon
NPO-16050 B83-10457 08

PRODUCTION MANAGEMENT

Continuous Monitoring of Melt
Composition
NPO-15896 B83-10574 04

PRODUCTIVITY

Wire Retrieves Broken Pin
MFS-19768 B83-10415 07

PROGRAM

(COMPUTERS)

Measuring Software-Execution Time
KSC-11267 B83-10278 02

PROGRAMMING LANGUAGES

SPIRE Data-Base Management
System
GSC-12684 B83-10737 09

PROPELLANT TRANSFER

Adhesive Removal From Protective
Clothing
KSC-11017 B83-10482 08

PROPELLER DRIVE

Noise Control in Propeller-Driven
Aircraft
LAR-12954 B83-10049 06

PROPHYLAXIS

Acoustic Tooth Cleaner
LAR-12471 B83-10367 05

PROPULSION

PERFORMANCE

Elliptical Orbit Performance Computer
Program
LAR-13026 B83-10632 06

PROSTHETIC DEVICES

Lightweight, Economical Device
Alleviates Drop Foot
LAR-12259 B83-10165 05
Adjustable Walker for the
Handicapped
LAR-12990 B83-10369 05

PROTECTIVE CLOTHING

Adhesive Removal From Protective
Clothing
KSC-11017 B83-10482 08

PROTECTIVE COATINGS

Improved Polyimide Intumescent
Coating
ARC-11369 B83-10338 04

PROTOTYPES

Rapid Circuit Breadboarding
MFS-25761 B83-10470 08

PROXIMITY

Focal-Plane-Array Optical Proximity
Sensors
NPO-15155 B83-10017 01

PSEUDORANDOM SEQUENCES

Pseudo-Random Number
Generators
MFS-27017 B83-10736 09

PULSE COMMUNICATION

Digital-Image Enhancement
MFS-25679 B83-10530 02

PULSE GENERATORS

Obtaining Pulses From a CW Laser
NPO-15111 B83-10309 03

PULSE POSITION MODULATION

Efficient Coding for Optical
Communication
NPO-15856 B83-10734 09

PUMP SEALS

Antivortex Inlet Ribs for Fluid-Seals
MFS-19793 B83-10426 07
Damping Seals for Turbomachinery
MFS-25834 B83-10437 07

PUMPS

Cryogenic Vacuum Pump
NPO-1517 B83-10198 07
Flow-Straightener Sleeve for Pump
Valve
MFS-19781 B83-10385 06
Radial-Cascade Analysis
MFS-19752 B83-10391 06
Estimating Pump Blockage
MFS-19763 B83-10414 07
Transportable Pumps Could Save Oil
Cargoes
MFS-25881 B83-10660 07

PURIFICATION

Fuel-Cell Reactant-Gas Purifier
MSC-20103 B83-10032 04
Removing Biostatic Agents From
Fermentation Solutions
NPO-15806 B83-10370 05
Purifying Silicon During Crystal
Growth
NPO-14831 B83-10730 08

PYROHELIOMETERS

Pyrheliometer With Improved
Accuracy
NPO-15398 B83-10143 03

PYROLYSIS

Combined Silane Pyrolysis and
Silicon-Particle Melt
NPO-15510 B83-10357 04
Making SixNyCz Fibers by Pyrolysis
MFS-25621 B83-10585 04
Silane Pyrolysis With Silicon-Seed
Aerosol
NPO-16054 B83-10591 04

PYROTECHNICS

Low-Shock Pyrotechnic Actuator
LAR-13198 B83-10636 06

Q

QUALITY CONTROL

X-Ray Inspection of Transistors
NPO-15675 B83-10225 08
Test Pattern for IC's
NPO-15648 B83-10232 08
Quality-Planning-Requirements
ments
MSC-20280 B83-10233 08
Digital Soldering-Iron Tester
MFS-25863 B83-10254 01
Hardware Fault Simulator Generates
Test Vectors For Complex IC's
NPO-15362 B83-10538 02

R

RADAR

Radar for Mapping Sea Ice
NPO-15350 B83-10135 02

RADAR DATA

Processing of
Synthetic-Aperture-Radar Data
NPO-15316 B83-10488 09

RADAR MAPS

Radar for Mapping Sea Ice
NPO-15350 B83-10135 02

RADAR MEASUREMENT

Improved Coal-Thickness
Measurement
MFS-23721 B83-10284 02

RADAR RESOLUTION

Eliminating Doppler Effects in
Synthetic-Aperture Radar Optical
Processors
NPO-14998 B83-10291 02

RADAR TRACKING

Digital SAR Processor
NPO-15519 B83-10287 02

RADIAL FLOW

Calculating the Flow Field in a Radial
Turbine Scroll
LEW-13437 B83-10104 07

RADIANT HEATING

Pyrheliometer With Improved
Accuracy
NPO-15398 B83-10143 03

RADIATION DETECTORS

X-Ray Detector for 1 to 30 keV
GSC-12682 B83-10008 01
Viewer Makes Radioactivity 'Visible'
GSC-12640 B83-10027 03
Microwave Radiation Detector
NPO-15932 B83-10325 03

RADIATION DISTRIBUTION

Estimating Waveguide Feed
Directivity and Spacing
NPO-15603 B83-10144 03

RADIATION EFFECTS

Radiation Improves Materials
Bonding
NPO-14995 B83-10364 04
Measuring High Gas Temperatures
LEW-13819 B83-10627 06

RADIATION LAWS

Thermal Radiation Analyzer System
GSC-12783 B83-10626 06

RADIATION TOLERANCE

Radiation-Hardness Data For
Semiconductor Devices
NPO-15787 B83-10507 01

RADIATIVE HEAT TRANSFER

High-Absorptance Radiative Heat
Sink
GSC-12739 B83-10110 08

RADIO ASTRONOMY

Microwave Radiation Detector
NPO-15932 B83-10325 03
Catalog of Spectral Lines
NPO-15181 B83-10556 03

RADIO FREQUENCIES

Radio-Frequency and Wideband
Modulation Arraying
NPO-15030 B83-10283 02

RADIO FREQUENCY DISCHARGE

Improved Coil for Hydrogen
Dissociators
MFS-25638 B83-10262 01

RADIO FREQUENCY HEATING

Absorbable-Susceptor Welding of
Ceramics
NPO-15640 B83-10217 08
Forming Lightweight Beams From
Composite Tape
MFS-25880 B83-10694 08

RADIO RECEIVERS

Sideband-Aided Receiver Arrays
NPO-15873 B83-10522 02

RADIO SIGNALS

Receiver for Antenna Arrays
NPO-15089 B83-10015 02
Binary Correlator for Electromagnetic
Signal Patterns
GSC-12714 B83-10275 02

RADIO TELEMETRY

Linking 'Smart' Modules by a Single
Channel
NPO-15342 B83-10134 02

RADIO TRANSMITTERS

Remotely-Operated Traffic Control
Light
ARC-11406 B83-10512 01

RADIOACTIVE WASTES

Packaging Nuclear and Chemical
Waste for Disposal
NPO-15454 B83-10348 04

RADIOGRAPHY

Neutron Probe of Building-Wall
Composition
GSC-12808 B83-10541 03

RADIOMETERS

Lenseless Scanning Telescope
LAR-12648 B83-10022 03
Pyreheliometer With Improved
Accuracy
NPO-15398 B83-10143 03
Solar-Collector Radiometer
NPO-14986 B83-10313 03

RAIL TRANSPORTATION

Locomotive Truck Dynamics
MFS-25872 B83-10390 06

RAIN

Rain and Dew Detector
NPO-15370 B83-10405 06

RANDOM NUMBERS

Generating Random Number Pairs
MFS-27039 B83-10496 09

RANDOM PROCESSES

Random Life Curves for Common
Engineering Materials
MSC-20433 B83-10163 04

RANGE ERRORS

Processing of
Synthetic-Aperture-Radar Data
NPO-15316 B83-10488 09

RANGE FINDERS

Self-Modulated Laser Rangefinder
GSC-12761 B83-10142 03

RAPID QUENCHING (METALLURGY)

Quenching Alloys in Containerless
Processing
MFS-25305 B83-10478 08

RARE GAS-HALIDE LASERS

Controlling Metal-Halide Vapor
Density in Lasers
NPO-15021 B83-10310 03

RC CIRCUITS

Thermal Radiation Analyzer System
GSC-12783 B83-10626 06

REACTION TIME

Preventing Motor Damage Due to
Rapid Reversal
MFS-19702 B83-10676 07

RECEIVERS

Directional Coupler With Increased
Directivity
NPO-15892 B83-10252 01
Frequency-Diversity Reception for
Phase Modulation
NPO-15040 B83-10290 02
Determining the Nonlinearity of
Microwave Receivers
NPO-15355 B83-10536 02

RECEPTION DIVERSITY

Receiver for Antenna Arrays
NPO-15089 B83-10015 02
Sideband-Aided Receiver Arrays
NPO-15873 B83-10522 02

RECORDING INSTRUMENTS

Portable X-Y Scanner
MFS-25687 B83-10411 07
Status Panel For Video Cassette
Recorders
KSC-11254 B83-10532 02

RECOVERABILITY

Wire Retrieves Broken Pin
MFS-19768 B83-10415 07

RECRYSTALLIZATION

Annealing Solar Cells With Lasers
NPO-15694 B83-10120 08

RECTENNAS

Printed Circuit Converts RF Energy
to dc Power
LEW-13913 B83-10002 01

RECYCLING

Recycling Lithium Carbonate/Lithium
Hydroxide Waste
KSC-11261 B83-10033 04
Bricks and Cans for Thermal
Storage
MFS-25625 B83-10315 03

REDUNDANT COMPONENTS

Coaxial Redundant Drives
MFS-25171 B83-10197 07

REFINING

One-Step Coal Liquefaction
NPO-15891 B83-10326 04
Molten Slag Would Boost Coal
Conversion
NPO-15711 B83-10327 04
Dissolving Bubbles in Glass
NPO-15105 B83-10347 04

REFLECTORS

Normal-Incidence Soft-X-Ray Mirror
NPO-15828 B83-10145 03
Adjusting the Contour of Reflector
Panels
NPO-15319 B83-10721 08

REFRACTORY MATERIALS

Fire-Resistant Composites
ARC-11331 B83-10041 04

REFRIGERATING

Passive Module for Cryogenic
Refrigeration
ARC-11263 B83-10401 06

REFRIGERATORS

Ionic Refrigerator
NPO-15288 B83-10320 03
Motorized Cryogenic Valve
ARC-11452 B83-10687 07

REGENERATIVE COOLING

Variable-Conductance Heat-Transfer
Module
GSC-12771 B83-10408 07

REGULATORS

Improved Two-Phase Switching
Regulator
NPO-15172 B83-10267 01

REINFORCEMENT (STRUCTURES)

Reinforcement for Stretch Formed
Sheet Metal
MSC-20228 B83-10108 08
Low-Weight Inserts for Aluminum
Honeycomb Panels
MSC-20227 B83-10116 08
Roof Support Near Coal-Mining
Face
NPO-15165 B83-10431 07
Repairing Defective Welds
MFS-19618 B83-10484 08

REINFORCING FIBERS

Stronger Carbon Fibers for
Reinforced Plastics
ARC-11261 B83-10035 04

RELEASING

Reusable Release Mechanism
MSC-20080 B83-10666 07
Retention Mechanism for Spinning
Objects
MFS-25957 B83-10674 07

RELIABILITY

Transonic Airfoil Analysis
ARC-11436 B83-10395 06

RELIABILITY ANALYSIS

Screening Plastic-Encapsulated
Solid-State Devices
MFS-25802 B83-10506 01

RELIEF VALVES

Belleville Spring/Seal
MFS-19596 B83-10653 06

REMOTE CONTROL

Improving Control of Remote
Manipulators
NPO-15049 B83-10018 02
Remotely-Adjustable
of Valve
NPO-15693 B83-10404 06
Three-Fingered Robot Hand
NPO-15959 B83-10409 07

REMOTE HANDLING

Remote Manipulator Has Relistic
'Feel'
NPO-15065 B83-10083 07

REMOTE MANIPULATOR SYSTEM

Improving Control of Remote
Manipulators
NPO-15049 B83-10018 02

REMOTE SENSING

Radar Cuts Subsoil Survey Costs
KSC-11227 B83-10276 02
Scanning XeCl Laser
NPO-15692 B83-10307 03
Detecting Methane Leaks
NPO-15790 B83-10329 04

SUBJECT INDEX

SEALING

REMOTE SENSORS

Membrane Switches Check Seal
Pressure
MSC-20468 B83-10373 06

REMOVAL

Staked Bearing Removal Tool
MSC-20337 B83-10093 07

REPLACING

Staked Bearing Removal Tool
MSC-20337 B83-10093 07

REPLENISHMENT

Cold-Crucible Premelter for Silicon
NPO-16050 B83-10457 08

REPORT GENERATORS

Launch-Window Program
GSC-12801 B83-10628 06

REPORTS

Solar Heating and Cooling
Development Program
MFS-27015 B83-10304 03
Designing Flat-Plate Photovoltaic
Arrays
NPO-15729 B83-10305 03

RESCUE OPERATIONS

Binary Correlator for Electromagnetic
Signal Patterns
GSC-12714 B83-10275 02

RESEARCH AND DEVELOPMENT

Research and Development Mission
Analysis System
GSC-12847 B83-10741 09

RESIDENTIAL ENERGY

Solar Heating and Cooling
Development Program
MFS-27015 B83-10304 03

RESINS

Process for Molding Nonreinforced
(Neat) Resins
LAR-12981 B83-10038 04
Polycarbosilazane-Resin
on Process
MFS-25758 B83-10330 04
Improved Thermosetting Imide
Resins
ARC-11368 B83-10341 04

RESOLVERS

Circuitry for Angle Measurements
MFS-25825 B83-10137 02

RESOURCES MANAGEMENT

Forest Resource Information System
MSC-20270 B83-10245 09

RESPIRATION

Heart-Rate and Breath-Rate Monitor
MSC-20078 B83-10045 05

RESPONSE TIME (COMPUTERS)

Measuring Software-Execution Time
KSC-11267 B83-10278 02

RETAINING

Retaining-Ring Installation Tool
MFS-19725 B83-10098 07

RETARDANTS

Improved Polyimide Intumescent
Coating
ARC-11369 B83-10338 04

RETROFITTING

Retrofitting Vibration Dampers
MFS-19790 B83-10685 07

REUSE

Reusable Release Mechanism
MSC-20080 B83-10666 07

REVERSE OSMOSIS

High-Flow Asymmetric
Reverse-Osmosis Membranes
ARC-11359 B83-10598 05

REVISIONS

Growing Single-Crystal Sheets by
Controlled Cooling
NPO-15800 B83-10459 08

RHENIUM

Rhenium Prevents Corrosion
NPO-15011 B83-10361 04

RIBBONS

Gas-Jet Meniscus Control in Ribbon
Growth
NPO-14978 B83-10112 08
Improved Radiative Control of Ribbon
Growth
NPO-15916 B83-10456 08
Starting Silicon-Ribbon Growth
Automatically
NPO-15919 B83-10458 08
Solar-Cell-Manufacturing System
MFS-25483 B83-10728 08

RING STRUCTURES

Tool Support Ring
MFS-19765 B83-10665 07

ROBOTS

Improving Control of Remote
Manipulators
NPO-15049 B83-10018 02
Task Board Tests Manipulator
Performance
NPO-15150 B83-10070 06
Remote Manipulator Has Relistic
'Feel'
NPO-15065 B83-10083 07
Robotic Water Blast Cleaner
MFS-25519 B83-10092 07
Three-Fingered Robot Hand
NPO-15959 B83-10409 07
Integrated Tactile Sensor for Robots
NPO-15094 B83-10610 06
Automated Assembly of Solar
Panels
NPO-16206 B83-10729 08

ROCKET ENGINE DESIGN

Rhenium Prevents Corrosion
NPO-15011 B83-10361 04

ROLLER BEARINGS

Staked Bearing Removal Tool
MSC-20337 B83-10093 07
Spherical-Bearing Analysis Program
LEW-13626 B83-10671 07

ROOFS

Edge Supports for Photovoltaic
Modules
NPO-15740 B83-10452 08
Photovoltaic Roofs
NPO-15881 B83-10453 08

ROTATING BODIES

Free-Vibration Analysis of Structures
NPO-15797 B83-10625 06
Retention Mechanism for Spinning
Objects
MFS-25957 B83-10674 07
Miniature Rotator
LAR-12765 B83-10675 07

ROTATING MIRRORS

Torque Compensator for Mirror
Mountings
GSC-12742 B83-10169 06

ROTOR SPEED

Feedback Control of Rotor
Overspeed
ARC-11404 B83-10668 07

RUNGE-KUTTA METHOD

Obtaining Runge-Kutta Solutions
Between Time Steps
MSC-20404 B83-10489 09

S

S WAVES

Measuring Ultrasonic Shear-Wave
Velocity
MFS-19680 B83-10058 06

S-N DIAGRAMS

Random Life Curves for Common
Engineering Materials
MSC-20433 B83-10163 04

SAFETY

SixNyCz Fibers for Safer
Composites
MFS-25721 B83-10331 04

SAFETY DEVICES

Fuse Protects Parabolic-Dish Solar
Collector
NPO-15662 B83-10148 03
Triple-Seal Valve
MSC-20628 B83-10670 07
Attaching Chuck Keys to Machine
Tools
KSC-11249 B83-10684 07

SAFETY MANAGEMENT

Control-Chain Safety Tray and
Friction Pull
MSC-20401 B83-10416 07

SAMPLES

Controlling the Focus in
Electron-Beam Welders
MFS-19814 B83-10664 07

SCANNERS

Electronically-Scanned Pressure
Sensors
ARC-11361 B83-10387 06
Portable X-Y Scanner
MFS-25687 B83-10411 07
Improved Infrared Multispectral
Scanner
NPO-16143 B83-10552 03
Lensless Image Scanner
NPO-16004 B83-10553 03

SCHLIEREN PHOTOGRAPHY

Imaging Fluid Flow
MFS-25897 B83-10543 03
Laser Diode Schlieren Photography
LAR-12897 B83-10559 03

SCHMIDT CAMERAS

Beam Splitter Introduces Little
Aberration
NPO-15580 B83-10028 03
Multispectral Dual-Aperture Schmidt
Objective
GSC-12756 B83-10146 03

SCHOTTKY DIODES

Electrolytic Sharpening of
Diode-Contact Whiskers
NPO-15789 B83-10222 08
Schottky-Barrier Photocell With
Intermediate Metal Layer
GSC-12816 B83-10501 01

SCREWS

Self-Locking Connector
MFS-19716 B83-10095 07
Air-Lubricated Lead Screw
NPO-15617 B83-10101 07

SEA ICE

Radar for Mapping Sea Ice
NPO-15350 B83-10135 02
Antenna for Imaging Sea Ice
NPO-15352 B83-10271 01

SEALING

Rewaterproofing Silica Tiles
MSC-20340 B83-10111 08

SEALS (STOPPERS)

Better Seals for Vacuum Bags
MFS-25875 B83-10216 08
Membrane Switches Check Seal
Pressure
MSC-20468 B83-10373 06
Sealant Applicator for Fastener
Heads
MFS-25922 B83-10487 08
Double-Poppet Valve
MSC-20627 B83-10669 07
Triple-Seal Valve
MSC-20628 B83-10670 07
Temporary Sealing of Cavities for
Leak Testing
MFS-19646 B83-10680 07

SEALS (STOPPERS)

Calculating Static-Seal Leakage
Correlation
MFS-19674 B83-10175 06
Improved Gas Seal for Electrolytic
Cells
NPO-15163 B83-10366 04
Cryogenic Pressure Seal for Wires
MFS-19668 B83-10376 06
Feedthrough Seal For High-Pressure
Vessel
MSC-20625 B83-10502 01
Theory for Eccentric and Misaligned
Annular Seals
MFS-19892 B83-10652 06
Belleville Spring/Seal
MFS-19596 B83-10653 06
Barrier Self for Hydraulic Actuators
MSC-20390 B83-10655 06
Temporary Sealing of Cavities for
Leak Testing
MFS-19646 B83-10680 07

SEAMS (JOINTS)

Bellows With Longitudinal Beams
MFS-19633 B83-10713 08

SEARCH PROFILES

Binary Correlator for Electromagnetic
Signal Patterns
GSC-12714 B83-10275 02

SELF ALIGNMENT

Self-Righting Objects
NPO-15023 B83-10399 06

SELF ERECTING DEVICES

Erectable Space-Construction
Fixture
MSC-20259 B83-10469 08

SELF REPAIRING DEVICES

Control of Self-Replicating Systems
MFS-25865 B83-10494 09

SEMICONDUCTOR DEVICES

Ti/Pd/Cu Contacts for
Semiconductor Devices
NPO-15043 B83-10268 01
Radiation-Hardness Data For
Semiconductor Devices
NPO-15787 B83-10507 01

SEMICONDUCTOR JUNCTIONS

Electron Beam Could Probe
Recombination Centers
NPO-15285 B83-10141 03

SEMICONDUCTOR LASERS

Measuring Excess Noise in SDL's
LAR-12938 B83-10004 01

SEMICONDUCTORS (MATERIALS)

Screening Plastic-Encapsulated
Solid-State Devices
MFS-25802 B83-10506 01
Acoustic-Levitation Chamber
NPO-16142 B83-10726 08

SEPARATED FLOW

Fluid/Vapor Separator for Variable
Flow Rates
ARC-11401 B83-10299 03
Nonseparating High-Area-Ratio
Supersonic Nozzles
MFS-19758 B83-10657 06

SEPARATORS

In Situ Cross-Linking of Polyvinyl
Alcohol Films
LEW-13135 B83-10578 04

SERVICE LIFE

Transformer and Meter Tester
MFS-19708 B83-10681 07

SERVOCONTROL

Servo Lead Compensation
MFS-19614 B83-10513 01

SERVOMECHANISMS

Three-Fingered Robot Hand
NPO-15959 B83-10409 07
Three-Level Control of Manipulators
NPO-15048 B83-10493 09

SETUPS

Air Guide for Sheet-Metal Grinder
MFS-19788 B83-10423 07
Drilling Holes on a Large Bolt Circle
KSC-11115 B83-10434 07

SEWING

Bonded Lockstitch for Insulating
Blankets
MSC-20283 B83-10688 08

SHAFTS (MACHINE ELEMENTS)

Circuitry for Angle Measurements
MFS-25825 B83-10137 02
Coaxial Redundant Drives
MFS-25171 B83-10197 07

SHEAR FLOW

Measuring Surface-Shear Stress in a
Wind Tunnel
ARC-11384 B83-10180 06

SHEAR PROPERTIES

Sample Holder for Cryogenic
Adhesive Shear Test
MFS-25729 B83-10060 06

SHEAR STRENGTH

Characterizing Shear Properties of
Membranes
MFS-25745 B83-10057 06

SHEAR STRESS

Measuring Surface-Shear Stress in a
Wind Tunnel
ARC-11384 B83-10180 06

Acoustic Design Improves Composite
Impact Resistance
LAR-12887 B83-10375 06

Shear-Panel Test Fixture Eliminates
Corner Stresses
LAR-12930 B83-10383 06

SHEARING

Display for Mining-Machine
Operators
MFS-25955 B83-10535 02
Vertical-Control Subsystem for
Automatic Coal Mining
MFS-25811 B83-10659 07

SHEATHS

Light, Serviceable Insulation Blanket
MSC-20452 B83-10220 08

SHIELDING

Improved Connector Shell for Cable
Shields
NPO-15584 B83-10006 01
Add-On Shielding for Unshielded
Wire
NPO-15107 B83-10007 01

Shielding Electric Connectors From
Lightning
NPO-15688 B83-10511 01

SHOCK ABSORBERS

Segmented Tubular Seat Springs
ARC-11349 B83-10422 07

SHOCK SPECTRA

Estimating Design Loads in Coupled
Vibrating Structures
NPO-14872 B83-10182 06

SHOCK WAVE PROPAGATION

Supersonic-Nozzle Shock-Wave
Analysis
MFS-19753 B83-10656 06

SHOCK WAVES

Shock Free Airfoil Cascades
LEW-13842 B83-10076 06

SIALON

Sialon Electrodes and Insulators for
MHD Device
NPO-14945 B83-10352 04

SIGNAL DISTORTION

Estimating Effects of Flicker Noise in
Clock Signals
NPO-15525 B83-10537 02

SIGNAL ENCODING

Coding for Single-Line Transmission
KSC-11220 B83-10013 02
NRZ Data Asymmetry Corrector and
Convolutional Encoder
MSC-20187 B83-10133 02
Efficient Coding for Optical
Communication
NPO-15856 B83-10734 09

SIGNAL MEASUREMENT

Virtual-Center Antenna-Arraying
System
NPO-15874 B83-10273 02

SIGNAL PROCESSING

Rounding Technique for High-Speed
Digital Signal Processing
NPO-15307 B83-10014 02

SIGNAL TO NOISE RATIOS

Frequency-Diversity Reception for
Phase Modulation
NPO-15040 B83-10290 02
High-Common-Mode-Rejection
ential Amplifier
MFS-25868 B83-10519 01

SIGNAL TRANSMISSION

Efficient Distribution of
Frequency-Standard Signals
NPO-15392 B83-10012 02

SILANES

Combined Silane Pyrolysis and
Silicon-Particle Melt
NPO-15510 B83-10357 04

Measuring Trace Hydrocarbons in
Silanes
NPO-15273 B83-10359 04

SILICON

Measuring Diffusion and
Recombination in Polycrystalline
Silicon
NPO-15601 B83-10039 04
Gas-Jet Meniscus Control in Ribbon
Growth
NPO-14978 B83-10112 08
Generating SiF₄ From H₂SiF₆
NPO-15721 B83-10155 04
Fracture Strength of Silicon Solar
Cells
NPO-15187 B83-10181 06
Low-Contamination Vibrating Feeder
for Silicon Chips
NPO-15128 B83-10445 07

SUBJECT INDEX

Oscillating-Crucible Technique for Silicon Growth
NPO-15938 B83-10455 08
Improved Radiative Control of Ribbon Growth
NPO-15916 B83-10456 08
Starting Silicon-Ribbon Growth Automatically
NPO-15919 B83-10458 08
Growing Single Crystals From Low-Purity Silicon
NPO-15538 B83-10472 08
Melt-Level Sensing in Silicon-Web Growth
NPO-15356 B83-10473 08
Sampling of Silicon Powder for Impurity Analysis
NPO-15840 B83-10590 04
Silane Pyrolysis With Silicon-Seed Aerosol
NPO-16054 B83-10591 04
Purifying Silicon During Crystal Growth
NPO-14831 B83-10730 08

SILICON COMPOUNDS
Generating SiF₄ From H₂SiF₆
NPO-15721 B83-10155 04

SILICON CONTROLLED RECTIFIERS
Using a PFET To Commutate an SCR
NPO-15282 B83-10253 01

SILICON FILMS
Improved Silicon-Growth Chamber
NPO-15237 B83-10471 08
Proposed Technique of Crystal-Ribbon Growth
NPO-15629 B83-10474 08
Silicon-Film Growth by Continuous Edge-Supported Melt Skimming
NPO-15532 B83-10731 08

SILICON RADIATION DETECTORS
X-Ray Detector for 1 to 30 keV
GSC-12682 B83-10008 01

SILICON TRANSISTORS
High Power Switching Transistor
LEW-13728 B83-10127 01

SILICONES
Silicone Cerenkov-Radiator Material
GSC-12805 B83-10328 04
Combined Silane Pyrolysis and Silicon-Particle Melt
NPO-15510 B83-10357 04

SILICONIZING
Studies of the Inverted Meniscus Deposition of Silicon on Ceramic
NPO-15602 B83-10234 08

SIMULATION
Monte Carlo Investigation of Trajectories
GSC-12705 B83-10074 06
Crash Simulation and Nonlinear Structural Analysis
LAR-12926 B83-10392 06

SINGLE CRYSTALS
Growing Single Crystals From Low-Purity Silicon
NPO-15538 B83-10472 08
Shield Boosts Silicon-Growth Rate
NPO-16049 B83-10475 08

SINGLE SIDEBAND TRANSMISSION
Demodulator for AM and SSB-SC Signals
LAR-12716 B83-10509 01

SINTERING
Predicting Sintered-Metal Resistivity From Porosity
NPO-15587 B83-10158 04

SIZE DETERMINATION

Measuring Small Leak Holes
MSC-20113 B83-10063 06

SLAGS
Molten Slag Would Boost Coal Conversion
NPO-15711 B83-10327 04
Monitoring the Thickness of Coal-Conversion Slag
NPO-15371 B83-10397 06

SLEEVES
Securing Identification Sleeving
MFS-19685 B83-10716 08

SLIDING
Designing More-Efficient Spur Gears
LEW-13921 B83-10662 07

SLOT ANTENNAS
Fabricating Slotted-Waveguide Arrays From Sheet Metal
NPO-15664 B83-10214 08

SLURRIES
Oxidation-Resistant Slurry Coating for Carbon-Based Materials
LEW-13951 B83-10572 04

SOIL MAPPING
Radar Cuts Subsoil Survey Costs
KSC-11227 B83-10276 02

SOLAR ACTIVITY
Least-Squares Prediction of Solar Activity
MFS-25870 B83-10303 03

SOLAR ARRAYS
Hiding Solar-Array Bus Bars
NPO-15755 B83-10126 01
Detecting Solar-Cell Failures
NPO-15741 B83-10129 01
Compact Concentrators for Solar Cells
MFS-25511 B83-10293 03
Designing Flat-Plate Photovoltaic Arrays
NPO-15729 B83-10305 03
Handling Fixture for Solar-Cell Arrays
NPO-15908 B83-10450 08
Better Thermal Insulation in Solar-Array Laminators
NPO-15925 B83-10451 08
Photovoltaic Roofs
NPO-15881 B83-10453 08
Concentrator-Enhanced Solar Array
NPO-15628 B83-10566 03
Locking Corners Speed Solar-Array Frame Assembly
NPO-15750 B83-10697 08

SOLAR BLANKETS
Automated Assembly of Solar Panels
NPO-16206 B83-10729 08

SOLAR CELLS
Determining Solar-Cell Operating Temperature
NPO-15449 B83-10010 01
Fast Electronic Solar Cell Tester
NPO-15676 B83-10011 02
Solar-Cell Slide Rule
NPO-15646 B83-10106 08
Annealing Solar Cells With Lasers
NPO-15694 B83-10120 08
Hiding Solar-Array Bus Bars
NPO-15755 B83-10126 01
Detecting Solar-Cell Failures
NPO-15741 B83-10129 01
Developing Standards for Photovoltaic Devices
NPO-15734 B83-10130 01

SOLAR ENERGY

Portable Data Logger for Photovoltaic Panels
NPO-15158 B83-10139 02
Freeze/Thaw Properties of Cellular Glass
NPO-15854 B83-10162 04
Fracture Strength of Silicon Solar Cells
NPO-15187 B83-10181 06
Preparing Solar Cells for Soldering
NPO-15626 B83-10218 08
Studies of the Inverted Meniscus Deposition of Silicon on Ceramic
NPO-15602 B83-10234 08
Two-Stage Off-Axis Cylindrical Solar Concentrator
NPO-15484 B83-10295 03
Labeling Solar-Cell Modules
NPO-15997 B83-10454 08
Low-Cost GaAs Solar Cells
NPO-14914 B83-10476 08
Preventing Moisture Damage To Solar Panels
NPO-15481 B83-10477 08
Multiple-Band-Gap Solar-Cell Concept
MFS-25724 B83-10517 01
Modeling of Solar Concentrators
NPO-15034 B83-10562 03
Less-Costly Ion Implantation of Solar Cells
NPO-15511 B83-10699 08
Ultrasonic Bonding of Solar-Cell Leads
NPO-16140 B83-10702 08
Solar-Cell-Manufacturing System
MFS-25483 B83-10728 08
Aligning Solder Pads on a Solar Cell
NPO-15298 B83-10732 08

SOLAR COLLECTORS
Fuse Protects Parabolic-Dish Solar Collector
NPO-15662 B83-10148 03
Fabrication of Structural Cellular Glass
NPO-15731 B83-10223 08
Two-Stage Off-Axis Cylindrical Solar Concentrator
NPO-15484 B83-10295 03
Solar-Collector Radiometer
NPO-14986 B83-10313 03
Two-Fluid Solar Pond
NPO-15419 B83-10316 03
Ceramics for Solar Receivers
NPO-15763 B83-10351 04
Edge Supports for Photovoltaic Modules
NPO-15740 B83-10452 08
Predicting Solar Deficits
NPO-15667 B83-10561 03
Parabolic Solar Collectors
NPO-15674 B83-10564 03
Pressure/Vacuum Bonding for Low-Curvature Mirrors
NPO-15613 B83-10718 08

SOLAR COOLING
Solar Heating and Cooling Development Program
MFS-27015 B83-10304 03

SOLAR ENERGY
Edge Supports for Photovoltaic Modules
NPO-15740 B83-10452 08
Improved Heat-Engine Solar-Energy System
NPO-15762 B83-10560 03

SOLAR GENERATORS

SUBJECT INDEX

SOLAR GENERATORS

Cost Effectiveness of Hybrid Solar Powerplants
NPO-15735 B83-10149 03

SOLAR HEATING

Solar Heating and Cooling Development Program
MFS-27015 B83-10304 03
Ceramic Solar Receiver
NPO-15769 B83-10314 03
Bricks and Cans for Thermal Storage
MFS-25625 B83-10315 03
Airflow Assists Solar Receiver
NPO-15784 B83-10545 03
Air-Conditioning for Electric Vehicles
NPO-15183 B83-10549 03
Saltless Solar Ponds
NPO-15808 B83-10563 03

SOLAR PONDS (HEAT STORAGE)

Solar-Pond Resources in the United States
NPO-15681 B83-10150 03

SOLAR RADIATION

Predicting Solar Deficits
NPO-15667 B83-10561 03

SOLAR REFLECTORS

Fabrication of Structural Cellular Glass
NPO-15731 B83-10223 08
Testing Large Solar Mirrors
NPO-15404 B83-10294 03
Two-Stage Off-Axis Cylindrical Solar Concentrator
NPO-15484 B83-10295 03
Glass for Solar Concentrators
NPO-14923 B83-10354 04
Foil Panel Mirrors for Nonimaging Applications
GSC-12751 B83-10449 08
High-Temperature Helical-Tube Solar Receiver
NPO-15768 B83-10565 03

SOLAR SENSORS

Pyrheliometer With Improved Accuracy
NPO-15398 B83-10143 03

SOLDERED JOINTS

Detecting Defective Solder Bonds
MFS-25507 B83-10260 01

SOLDERING

Preparing Solar Cells for Soldering
NPO-15626 B83-10218 08
Digital Soldering-Iron Tester
MFS-25863 B83-10254 01

SOLID ELECTROLYTES

Ion Engine With Solid-Electrolyte Ion Generator
NPO-15809 B83-10548 03

SOLID STATE DEVICES

The Effect of Cosmic Rays on MSI Devices
NPO-15779 B83-10263 01
Screening Plastic-Encapsulated Solid-State Devices
MFS-25802 B83-10506 01

SOLIDIFICATION

Directional Solidification of Monotectic Alloys
MFS-25767 B83-10157 04
Directional Solidification of Monotectic Alloys
MFS-25767 B83-10159 04

SOLUBILITY

Estimating the Solubility of Gases in Battery Electrolytes
NPO-15610 B83-10321 03

SOLUTIONS

Pressure-Reduction Technique for Crystal Growth
NPO-15772 B83-10226 08

SOLVENT EXTRACTION

Supercritical-Multiple-Solvent on From Coal
NPO-15767 B83-10153 04
Recovering Zinc From Discarded Tires
NPO-16046 B83-10568 04
Solvent Extraction of Furfural From Biomass
NPO-15987 B83-10599 05

SOLVENTS

Solvent-Resistant Polysulfones
LAR-12931 B83-10151 04
Cracks in Glass Polymers Induced by Solvent Absorption
NPO-15072 B83-10161 04

SONAR

Unmanned Instrument Platform for Undersea Exploration
NPO-15878 B83-10526 02

SOOT

Reducing Soot in Diesel Exhaust
NPO-15715 B83-10355 04

SOURCE PROGRAMS

FORTAN Static Source Code Analyzer
GSC-12724 B83-10738 09

SPACE SHUTTLE PAYLOADS

Methods for Estimating Payload/Vehicle Design Loads
NPO-15550 B83-10184 06

SPACE SHUTTLES

Quality-Planning-Requirements ments
MSC-20280 B83-10233 08

SPACEBORNE TELESCOPES

Lenseless Scanning Telescope
LAR-12648 B83-10022 03

SPACECRAFT

ELECTRONIC EQUIPMENT
Electronic-Power-Transformer Design Guide
LEW-13208 B83-10131 01

SPARK MACHINING

Wire Electrical-Discharge Machining Aid
MFS-19643 B83-10686 07
Electroformed Electrodes for Electrical-Discharge Machining
MFS-19651 B83-10715 08

SPECTROMETERS

Electronically-Scanned form Spectrometer
NPO-15844 B83-10292 02

SPECTROSCOPY

Collecting Light From Point Images
NPO-15887 B83-10542 03
Continuous Monitoring of Melt Composition
NPO-15896 B83-10574 04

SPEED CONTROL

Controlling An Inverter-Driven Three-Phase Motor
MFS-25215 B83-10510 01

SPEED INDICATORS

Brushless Low-Speed dc Tachometer
NPO-15706 B83-10650 06
Optical Turbopump Speed Sensor
MFS-19794 B83-10651 06

SPHERICAL SHELLS

Fabrication of Hollow Spheres
NPO-15798 B83-10467 08

Hollow Spheres of Metallic Glass
NPO-15991 B83-10583 04

SPIKING

Ribbon Reduces Spiking in Electron-Beam Welding
MFS-19701 B83-10698 08

SPRAYED COATINGS

Oxidation-Resistant Slurry Coating for Carbon-Based Materials
LEW-13951 B83-10572 04
Conductive Plasma-Sprayed Coatings
NPO-15927 B83-10595 04

SPRINGS (ELASTIC)

Segmented Tubular Seat Springs
ARC-11349 B83-10422 07
Bearing Wear in Large Thermal Gradients
MFS-25879 B83-10428 07

STABILITY TESTS

Stability Test for Transient-Temperature Calculations
MFS-25803 B83-10381 06

STABILIZERS (AGENTS)

Solvent-Resistant Polysulfones
LAR-12931 B83-10151 04

STABLE OSCILLATIONS

Stabilizing Crystal Oscillators With Melting Metals
NPO-15641 B83-10257 01

STANDARD DEVIATION

Determining Normal-Distribution Tolerance Bounds Graphically
MSC-20115 B83-10238 09

STANDARDIZATION

Developing Standards for Photovoltaic Devices
NPO-15734 B83-10130 01

STANDARDS

Digital Phase-Shift Standard
KSC-11250 B83-10001 01
Standards for Epoxies Used in Microelectronics
MFS-25810 B83-10042 04
Hydrogen Masers as Time and Frequency Standards
NPO-15858 B83-10298 03
Catalog of Spectral Lines
NPO-15181 B83-10556 03

STAR TRACKERS

Sun Tracker Operates a Year Between Calibrations
NPO-15810 B83-10546 03

STATISTICAL ANALYSIS

Determining Normal-Distribution Tolerance Bounds Graphically
MSC-20115 B83-10238 09
FORTAN Static Source Code Analyzer
GSC-12724 B83-10738 09

STEERABLE ANTENNAS

Phased-Antenna-Array Conical Scanning
NPO-15899 B83-10274 02

STIFFNESS

Characterizing Shear Properties of Membranes
MFS-25745 B83-10057 06
Analyzing Vibrations in a Long Mast
MFS-25746 B83-10641 06

STIRLING CYCLE

Low-Vibration Oscillating Compressor
GSC-12799 B83-10658 07

SUBJECT INDEX

STRAIN GAGES

Attaching Strain Gages to Composite Materials
MFS-25867 B83-10378 06
Internally Mounting Strain Gages
GSC-12824 B83-10618 06
Heater Ensures Strain-Gage Bond Reliability
MFS 19859 B83-10619 06

STRESS ANALYSIS

Random Life Curves for Common Engineering Materials
MSC-20433 B83-10163 04
Strain Analysis of Graphite/Epoxy Vessels
MFS-27018 B83-10714 08

STRESS CORROSION

Stress-Corrosion Cracking in Martensitic PH Stainless Steels
MFS-25400 B83-10342 04

STRESS CORROSION CRACKING

Stress Corrosion Cracking of Certain Aluminum Alloys
MFS-25773 B83-10160 04

STRETCH FORMING

Reinforcement for Stretch Formed Sheet Metal
MSC-20228 B83-10108 08

STRIP TRANSMISSION LINES

Stripline Antenna Beam-Forming Network
NPO-15743 B83-10503 01

STRUCTURAL ANALYSIS

Simplified Modeling of Tetrahedral Trusses
LAR-12815 B83-10068 06
Estimating Design Loads in Coupled Vibrating Structures
NPO-14872 B83-10182 06
Crash Simulation and Nonlinear Structural Analysis
LAR-12926 B83-10392 06
Mathematical Instability Criteria for Elastic Structures
NPO-15090 B83-10620 06
System for Structural Synthesis Combines Finite-Element Analysis and Optimization Programs
LAR-13046 B83-10623 06
Free-Vibration Analysis of Structures
NPO-15797 B83-10625 06

STRUCTURAL DESIGN

Minimizing Weight of Structural Designs
LAR-13107 B83-10624 06

STRUCTURAL ENGINEERING

General-Purpose Icosahedral Structure
GSC-12854 B83-10612 06

STRUCTURAL MEMBERS

Self-Alining Quick-Connect Joint
LAR-12711 B83-10094 07
Joining Tubes With Adhesive
MFS-25958 B83-10700 08

STRUCTURAL STRAIN

Retrofitting Vibration Dampers
MFS-19790 B83-10685 07

STRUCTURAL VIBRATION

Time-Domain Modal Vibration Identification
LAR-12924 B83-10072 06
Estimating Design Loads in Coupled Vibrating Structures
NPO-14872 B83-10182 06
Accuracy Criterion for Structural Calculations
NPO-16008 B83-10634 06

SUBLIMATION

Identifying Boundary-Layer Transitions on Aircraft Skin
LAR-13089 B83-10609 06

SUBMILLIMETER WAVES

Low-Noise Submillimeter-Wave Diode
NPO-15935 B83-10498 01

SUBSTRATES

Forming Mirrors on Composite Materials
NPO-15912 B83-10215 08
Studies of the Inverted Meniscus Deposition of Silicon on Ceramic
NPO-15602 B83-10234 08
Evaluation of Structural Cellular Glass
NPO-15680 B83-10339 04

SUBSTRUCTURES

Estimating Design Loads in Coupled Vibrating Structures
NPO-14872 B83-10182 06

SULFUR

Three-Zone Catalyst Resists Sulfur Poisoning
NPO-14827 B83-10356 04

SULFUR DIOXIDES

Removing Sulfur Dioxide From Flue Gases
NPO-15758 B83-10593 04

SUPERCONDUCTIVITY

X-Ray-Diffraction Analysis of Nb/Ge Alloys
MFS-27038 B83-10594 04

SUPERSONIC FLOW

Supersonic-Nozzle Shock-Wave Analysis
MFS-19753 B83-10656 06

SUPERSONIC JET FLOW

Suppressing Transient Side Loads in Supersonic Nozzles
MFS-19769 B83-10379 06

SUPERSONIC NOZZLES

Nonseparating High-Area-Ratio Supersonic Nozzles
MFS-19758 B83-10657 06

SUPPORTS

Two-Degree-of-Freedom Mount System for Flutter Models
LAR-12950 B83-10062 06
Isolating Supports for X-Ray Mirrors
MFS-25904 B83-10386 06
Shock Mounting for Heavy Machines
MFS-25888 B83-10420 07
Roof Support Near Coal-Mining Face
NPO-15165 B83-10431 07
Edge Supports for Photovoltaic Modules
NPO-15740 B83-10452 08
Partial-Payload Support Structure
MFS-25485 B83-10647 06

SURFACE DEFECTS

Deallocating Defective Space on Winchester Disks
KSC-11287 B83-10534 02

SURFACE FINISHING

Repairing Thermal Tiles
MSC-20336 B83-10712 08

SURFACE ROUGHNESS

Dissociated Airflow Effects During Plasma-Arc Testing
MSC-20522 B83-10185 06

SURFACE TEMPERATURE

Dissociated Airflow Effects During Plasma-Arc Testing
MSC-20522 B83-10185 06

TECHNOLOGY ASSESSMENT

SURVEILLANCE

Telemetry Speeds Forest-Fire Control
ARC-11438 B83-10279 02

SURVEYS

Radar Cuts Subsoil Survey Costs
KSC-11227 B83-10276 02

SURVIVAL EQUIPMENT

Inflatable Rescue Capsules
MFS-25677 B83-10372 05

SUSPENSION SYSTEMS (VEHICLES)

Locomotive Truck Dynamics
MFS-25872 B83-10390 06

SWEPT WINGS

Vortex Lift Augmentation by Suction
LAR-12969 B83-10071 06

SWIRLING

Swirl Diffuser
MSC-18996 B83-10173 06

SWITCHES

Solid-State Crossbar Switch
NPO-15066 B83-10259 01
Membrane Switches Check Seal Pressure
MSC-20468 B83-10373 06
Preventing Motor Damage Due to Rapid Reversal
MFS-19702 B83-10676 07

SWITCHING

High Power Switching Transistor
LEW-13728 B83-10127 01

SWITCHING CIRCUITS

High Power Switching Transistor
LEW-13728 B83-10127 01
Improved Two-Phase Switching Regulator
NPO-15172 B83-10267 01

SYNTHETIC APERTURE RADAR

Radar for Mapping Sea Ice
NPO-15350 B83-10135 02
Digital SAR Processor
NPO-15519 B83-10287 02
Eliminating Doppler Effects in Synthetic-Aperture Radar Optical Processors
NPO-14998 B83-10291 02
Processing of Synthetic-Aperture-Radar Data
NPO-15316 B83-10488 09

SYSTEMS MANAGEMENT

Control of Self-Replicating Systems
MFS-25865 B83-10494 09

T

TACHOMETERS

Brushless Low-Speed dc Tachometer
NPO-15706 B83-10650 06

TACTILE DISCRIMINATION

Integrated Tactile Sensor for Robots
NPO-15094 B83-10610 06

TAPERED COLUMNS

Fabrication of Graphite/Epoxy Column Elements
LAR-12915 B83-10115 08

TAR SANDS

Extracting Oil From Tar Sands
NPO-15760 B83-10349 04

TECHNOLOGY ASSESSMENT

Instrumentation and Control for Fossil-Energy Processes
NPO-15581 B83-10531 02

TECHNOLOGY UTILIZATION

SUBJECT INDEX

TECHNOLOGY UTILIZATION

Ion Engine With Solid-Electrolyte Ion Generator
NPO-15809 B83-10548 03

TELESCOPES
Lenseless Scanning Telescope
LAR-12648 B83-10022 03
Multispectral Dual-Aperture Schmidt Objective
GSC-12756 B83-10146 03
Eliminating 'Hotspots' in Digital Image Processing
NPO-15684 B83-10527 02

TELEVISION CAMERAS
Controlling TV-Camera f-Stop Remotely
KSC-11269 B83-10550 03

TEMPERATURE CONTROL
Cooling by Para-to-Ortho-Hydrogen Conversion
GSC-12770 B83-10024 03
Shell-Tile Thermal-Protection System
LAR-12862 B83-10051 06
Controlling Heat-Exchanger Outlet Temperature
MFS-19667 B83-10170 06
Stabilizing Crystal Oscillators With Melting Metals
NPO-15641 B83-10257 01
Cooling Waveguide Flanges in Microwave Transmitters
NPO-15401 B83-10264 01
Heat-Pipe Thermal Switch
GSC-12644 B83-10384 06
Variable-Conductance Heat-Transfer Module
GSC-12771 B83-10408 07
Metering Baffle for Turbine-Blade Cooling
MFS-25849 B83-10424 07
Miniature Temperature-Control Circuit
LAR-12900 B83-10515 01
Airflow Assists Solar Receiver
NPO-15784 B83-10545 03
Liquid-Droplet Radiative Cooler
MFS-25890 B83-10602 06

TEMPERATURE DEPENDENCE
Automated Magnetic Susceptibility Analysis
MFS-25935 B83-10592 04

TEMPERATURE DISTRIBUTION
Radially-Graduated
ture Profile
MFS-19831 B83-10607 06

TEMPERATURE EFFECTS
Freeze/Thaw Properties of Cellular Glass
NPO-15854 B83-10162 04
Effect of Temperature on Fiber-Optic Delay
NPO-15148 B83-10318 03
Bearing Wear in Large Thermal Gradients
MFS-25879 B83-10428 07

TEMPERATURE MEASUREMENT
Determining Solar-Cell Operating Temperature
NPO-15449 B83-10010 01

TEMPERATURE MEASURING INSTRUMENTS
Gas-Temperature Measurement With Minimal Perturbation
MSC-20338 B83-10061 06

TEMPERATURE PROBES

Temperature-Averaging Thermal Probe
GSC-12795 B83-10614 06

TENSILE STRENGTH
Stronger Carbon Fibers for Reinforced Plastics
ARC-11261 B83-10035 04

TENSILE STRESS
Measuring Elastic Modulus of Sintered Metal
NPO-15589 B83-10055 06

TERRAIN ANALYSIS
Radar Cuts Subsoil Survey Costs
KSC-11227 B83-10276 02
Algorithm for Constructing Contour Plots
ARC-11441 B83-10490 09

TEST CHAMBERS
Flame-Test Chamber
NPO-15407 B83-10719 08

TEST EQUIPMENT
Leak Tester for Cryogenic Flowlines
MSC-20233 B83-10174 06
Shear-Panel Test Fixture Eliminates Corner Stresses
LAR-12930 B83-10383 06

TEST FACILITIES
Test-Bench Dynamometer
NPO-15084 B83-10441 07

TEST PATTERN GENERATORS
Test Pattern for IC's
NPO-15648 B83-10232 08

TEST STANDS
Vibration-Isolation Bench for Testing in Vacuum
GSC-12753 B83-10171 06
Test Frame Simulates Zero Gravity
MFS-25518 B83-10637 06
Partial-Payload Support Structure
MFS-25485 B83-10647 06

TESTING TIME
Accelerated Solar-UV Test Chamber
NPO-15063 B83-10323 03

TESTS
Task Board Tests Manipulator Performance
NPO-15150 B83-10070 06

TETHERLINES
Latching Mechanism for Umbilical Connectors
MSC-20242 B83-10096 07

TETRAHEDRONS
Simplified Modeling of Tetrahedral Trusses
LAR-12815 B83-10068 06

THERMAL ANALYSIS
Stability Test for Transient-Temperature Calculations
MFS-25803 B83-10381 06

THERMAL CONDUCTIVITY
Improving A Guarded Hotplate
MSC-20447 B83-10069 06

THERMAL CONTROL COATINGS
Two-Layer Glass Thermal-Control Coating
ARC-11164 B83-10573 04

THERMAL DISSOCIATION
Decoupling a Reflecting Layer From Its Support Structure
NPO-15346 B83-10486 08

THERMAL ENERGY
Long Heat Pipe Transports 2.6 kW
NPO-16017 B83-10608 06

THERMAL INSULATION

Shell-Tile Thermal-Protection System
LAR-12862 B83-10051 06
Light, Serviceable Insulation Blanket
MSC-20452 B83-10220 08
Improved Polyimide Intumescent Coating
ARC-11369 B83-10338 04
Additional Heat Treatment for Silica-Fiber Insulation
MSC-20600 B83-10588 04
Repairing Thermal Tiles
MSC-20336 B83-10712 08

THERMAL MAPPING
Frost Forecasting for Fruitgrowers
KSC-11241 B83-10243 09
Temperature-Averaging Thermal Probe
GSC-12795 B83-10614 06

THERMAL RADIATION
Thermal Radiation Model Renodulization
MSC-20348 B83-10073 06
Thermal Radiation Analyzer System
GSC-12783 B83-10626 06

THERMAL SIMULATION
Thermal Modeling of Bridgman Crystal Growth
MFS-27003 B83-10237 08

THERMAL STRESSES
Fatigue Testing of Heat-Exchanger Tubes
MFS-19599 B83-10648 06

THERMALIZATION (ENERGY ABSORPTION)
High-Temperature Helical-Tube Solar Receiver
NPO-15768 B83-10565 03

THERMOCOUPLES
Measuring High Gas Temperatures
LEW-13819 B83-10627 06
Oxidation Protection for Thermocouples
NPO-15605 B83-10710 08

THERMODYNAMICS
Spherical-Bearing Analysis Program
LEW-13626 B83-10671 07

THERMOPLASTIC RESINS
Making Thermoplastics Flame-Resistant
NPO-14857 B83-10363 04

THERMOREGULATION
Controlling Heat-Exchanger Outlet Temperature
MFS-19667 B83-10170 06

THERMOSETTING RESINS
Process for Molding Nonreinforced (Neat) Resins
LAR-12981 B83-10038 04
Improved Thermosetting Imide Resins
ARC-11368 B83-10341 04

THIN FILMS
Computation of Bragg Reflection for Layered Microstructures
NPO-15880 B83-10300 03

THIN WALLED SHELLS
Fabrication of Hollow Spheres
NPO-15798 B83-10467 08

THREADS
Air-Lubricated Lead Screw
NPO-15617 B83-10101 07

THREE DIMENSIONAL FLOW
Improved Laser Velocimeter
MFS-25465 B83-10312 03

SUBJECT INDEX

Analyzing Flow Fields in
Axial-Compressor Rotors and Stators
LEW-13910 B83-10629 06
Simulating a Three-Dimensional Flow
in Pipes
ARC-11466 B83-10638 06

THRUST CHAMBERS
Rhenium Prevents Corrosion
NPO-15011 B83-10361 04

THRUST CONTROL
Mathematical Simulation of Flight
Maneuvers
NPO-15395 B83-10644 06

THYRISTORS
Simplified High-Power Inverter
NPO-15961 B83-10499 01

TILES
Shell-Tile Thermal-Protection
System
LAR-12862 B83-10051 06
Rewaterproofing Silica Tiles
MSC-20340 B83-10111 08
Repairing Thermal Tiles
MSC-20336 B83-10712 08

TIME LAG
Measuring Delay in Lasers
NPO-15242 B83-10558 03

TIMING DEVICES
Measuring Delay in Lasers
NPO-15242 B83-10558 03

TIRES
Recovering Zinc From Discarded
Tires
NPO-16046 B83-10568 04

TOKAMAK DEVICES
Ion Accelerator Merges Several
Beams
NPO-15547 B83-10540 03

TOOLING
Tooling Converts Stock Bearings To
Custom Bearings
LAR-12922 B83-10090 07
Tool Enlarges Hard-to-Reach Holes
MFS-19789 B83-10413 07

TOOLS
Electrochemical Deburring
MFS-19693 B83-10087 07
Gage Measures Recessed Gaps
MSC-20230 B83-10089 07
Staked Bearing Removal Tool
MSC-20337 B83-10093 07
Retaining-Ring Installation Tool
MFS-19725 B83-10098 07
Machining Three Prongs on a Shaft
MFS-19729 B83-10099 07
Locking Bolt
MSC-20439 B83-10202 07
Expander for Thin-Wall Tubing
MFS-19739 B83-10203 07
Tool for Guiding An Auger
MSC-20194 B83-10205 07
Bender/Coiler for Tubing
MSC-20410 B83-10206 07
Portable Roller Staking Tool
MSC-20281 B83-10208 07
Tool for Replacing Bushings
MSC-20282 B83-10209 07
Testing Bearings in Tight Spaces
MSC-20250 B83-10210 07
Holding Tubes in Place for Brazing
MFS-19658 B83-10211 07
Better Seals for Vacuum Bags
MFS-25875 B83-10216 08
Tool Releases Optical Elements
From Spring Brackets
GSC-12794 B83-10380 06

Hole-Center Locating Tool
KSC-11248 B83-10412 07
Tool Enlarges Hard-to-Reach Holes
MFS-19789 B83-10413 07
Wire Retrieves Broken Pin
MFS-19768 B83-10415 07
Air Guide for Sheet-Metal Grinder
MFS-19788 B83-10423 07
Tool for Taking Clay Impressions
MFS-19728 B83-10435 07
Tool for Tightening Bolts With
Knurled Heads
MFS-25694 B83-10436 07
Measuring Recessed Pins
MFS-19673 B83-10439 07
Bearing Measuring Fixture
MFS-19315 B83-10442 07
Stripper for Cables of Any Cross
Section
NPO-15631 B83-10443 07
Torque-Wrench Extension Arm
NPO-15495 B83-10447 07
Inspecting Joints With Grooved
Surfaces
MFS-25934 B83-10640 06
Installation/Removal Tool for
Screw-Mounted Components
MSC-20606 B83-10667 07
Depth Gage for Threaded Holes
MFS-19884 B83-10672 07
A One-Hand Nut and Bolt Assembly
Tool
MFS-19691 B83-10677 07
Portable Power Broach
MFS-19679 B83-10678 07
Hydraulic Tube Expander
MFS-19731 B83-10682 07
Attaching Chuck Keys to Machine
Tools
KSC-11249 B83-10684 07

TORCHES
Automatic Guidance System for
Welding Torches
MFS-25807 B83-10690 08

TORQUE
Tool for Tightening Bolts With
Knurled Heads
MFS-25694 B83-10436 07

TORQUEMETERS
Torque-Wrench Extension Arm
NPO-15495 B83-10447 07

TOWERS
Simplified Modeling of Tetrahedral
Trusses
LAR-12815 B83-10068 06

TRACE CONTAMINANTS
Measuring Trace Hydrocarbons in
Silanes
NPO-15273 B83-10359 04

TRACKED VEHICLES
Automated Coal-Mine Shuttle Car
NPO-15850 B83-10417 07
Shuttle-Car System for Continuous
Mining
NPO-15949 B83-10418 07

TRACKING (POSITION)
Tracking Visible Targets
Automatically
NPO-15226 B83-10642 06
Vertical-Control Subsystem for
Automatic Coal Mining
MFS-25811 B83-10659 07

TRACKING NETWORKS
Phased-Antenna-Array Conical
Scanning
NPO-15899 B83-10274 02

TRANSONIC FLOW

TRAFFIC CONTROL
Remotely-Operated Traffic Control
Light
ARC-11406 B83-10512 01

TRAILERS
Improved Cattle Hauler
FRC-11058 B83-10020 03

TRAINING SIMULATORS
Training Simulator for Fire
Management
MFS-25898 B83-10495 09

TRAJECTORY OPTIMIZATION
Planning Transport and
Manufacturing for Lowest Cost
NPO-15391 B83-10123 09

TRANSDUCERS
Level Sensor for Cryogenic Fluids
MSC-20302 B83-10009 01
Flexible Coupling for Angle
Transducer
NPO-15412 B83-10064 06
Transducer Joint for Kidney-Stone
Ultrasonics
GSC-12652 B83-10166 05

TRANSFORMERS
Electronic-Power-Transformer Design
Guide
LEW-13208 B83-10131 01

TRANSISTORS
High Power Switching Transistor
LEW-13728 B83-10127 01
Measuring Tension in Transistor
Suspensions
NPO-15677 B83-10128 01
X-Ray Inspection of Transistors
NPO-15675 B83-10225 08

TRANSITION TEMPERATURE
Electrical Dissipation Measurement of
Polymer Phase Transitions
LAR-12861 B83-10053 06

TRANSLATING
Software Specification Language
MFS-23737 B83-10244 09

TRANSMISSION LINES
Stabilizing Fiber-Optic Transmission
Lines
NPO-15036 B83-10319 03

TRANSMISSIONS (MACHINE ELEMENTS)
Coaxial Redundant Drives
MFS-25171 B83-10197 07
Equations for
Automotive-Transmission Performance
NPO-15825 B83-10410 07

TRANSMITTERS
Central Control of Local Oscillator
Frequencies
GSC-12804 B83-10533 02

TRANSONIC FLOW
Proposed Short-Throat Supersonic
Nozzles
MFS-19759 B83-10067 06
Shock Free Airfoil Cascades
LEW-13842 B83-10076 06
Flow Through a Rotating
Turbomachinery Blade Row
LEW-13832 B83-10102 07
Solutions of Transonic Flow in
Turbomachines
LEW-13896 B83-10186 06
Transonic, Axisymmetric Flow Over
Nozzle Afterbodies With Supersonic Jet
Exhausts
LAR-12957 B83-10187 06

Steady, Nonrotating, Blade-to-Blade
Potential Transonic Cascade Flow
Analysis Code
LEW-13854 B83-10189 06

TRANSPORT AIRCRAFT
Takeoff and Landing of Transport
Aircraft
LAR-13086 B83-10633 06

TRANSPORTER
Transporter for Treated Sheet
Materials
MSC-20332 B83-10204 07

TRUNCATION ERRORS
Rounding Technique for High-Speed
Digital Signal Processing
NPO-15307 B83-10014 02

TRUSSES
Simplified Modeling of Tetrahedral
Trusses
LAR-12815 B83-10068 06
Forming Lightweight Beams From
Composite Tape
MFS-25880 B83-10694 08

TUBE HEAT EXCHANGERS
High-Temperature Helical-Tube Solar
Receiver
NPO-15768 B83-10565 03
Fatigue Testing of Heat-Exchanger
Tubes
MFS-19599 B83-10648 06

TUBES
Lock for Tube Fittings
MFS-25964 B83-10440 07
Repairing Hidden Cracks in Coolant
Tubes
MFS-19796 B83-10689 08

TUNABLE LASERS
Simplified Laser Tuning
NPO-15690 B83-10308 03

TURBINE BLADES
Radial-Cascade Analysis
MFS-19752 B83-10391 06
Metering Baffle for Turbine-Blade
Cooling
MFS-25849 B83-10424 07
Convection-Cooled Turbine Airfoils
MFS-25848 B83-10425 07
Staging Two-Phase Turbines
NPO-15037 B83-10444 07

TURBINE ENGINES
Staging Two-Phase Turbines
NPO-15037 B83-10444 07

TURBINE PUMPS
Antivortex Inlet Ribs for Fluid-Seals
MFS-19793 B83-10426 07
Optical Turbopump Speed Sensor
MFS-19794 B83-10651 06

TURBINES
Wind Turbine With Concentric Ducts
KSC-11191 B83-10086 07
Flow Through a Rotating
Turbomachinery Blade Row
LEW-13832 B83-10102 07
Compressible Flow About Wind
Turbine Blades
LEW-13740 B83-10103 07
Calculating the Flow Field in a Radial
Turbine Scroll
LEW-13437 B83-10104 07
Off-Design Turbine Modeling
LEW-13674 B83-10195 06

TURBOCOMPRESSORS
Design of Multistage Axial-Flow
Compressors
LEW-13505 B83-10191 06

Axial Compressor Design and
Analysis
LEW-13488 B83-10196 06

TURBOFAN ENGINES
Reduced Aircraft-Engine Noise
LAR-12890 B83-10048 06

TURBOMACHINE BLADES
Flow Through a Rotating
Turbomachinery Blade Row
LEW-13832 B83-10102 07
PANEL Code for Planar Cascades
LEW-13862 B83-10190 06
Design of Multistage Axial-Flow
Compressors
LEW-13505 B83-10191 06

TURBOMACHINERY
Solutions of Transonic Flow in
Turbomachines
LEW-13896 B83-10186 06

TURBOSHAFTS
Damping Seals for Turbomachinery
MFS-25834 B83-10437 07

TURBULENCE
Searching for Clear-Air Turbulence
NPO-15351 B83-10016 02
Multivalued-Velocity-Field Model of
Turbulence
NPO-15748 B83-10183 06
Advances in Multivalued-Velocity
Theory of Turbulence
NPO-16006 B83-10622 06

TURBULENT BOUNDARY LAYER
Identifying Boundary-Layer
Transitions on Aircraft Skin
LAR-13089 B83-10609 06

TURBULENT FLOW
Boundary-Layer Equations for
Two-Dimensional and Axisymmetric
Flow
LAR-13015 B83-10080 06
Multivalued-Velocity-Field Model of
Turbulence
NPO-15748 B83-10183 06

TWISTED WINGS
Wing Subsonic Aerodynamic
Performance Estimates
LAR-12987 B83-10079 06

TWO DIMENSIONAL FLOW
Boundary-Layer Equations for
Two-Dimensional and Axisymmetric
Flow
LAR-13015 B83-10080 06
Stalled-Flow and Head-Loss Model
for Diffuser Pumps
MFS-19748 B83-10673 07

U

ULTRAPURE METALS
Quenching Alloys in Containerless
Processing
MFS-25305 B83-10478 08

ULTRASONIC CLEANING
Acoustic Tooth Cleaner
LAR-12471 B83-10367 05

ULTRASONIC RADIATION
Measuring Ultrasonic Shear-Wave
Velocity
MFS-19680 B83-10058 06

ULTRASONIC TESTS
Determining the Orientation of
Anisotropic Materials
MSC-20229 B83-10054 06

ULTRASONIC WAVE TRANSDUCERS
Ultrasonics and Optics Would Control
Shot Size
NPO-15608 B83-10107 08
Transducer Joint for Kidney-Stone
Ultrasonics
GSC-12652 B83-10166 05

ULTRASONIC WELDING
Ultrasonic Bonding of Solar-Cell
Leads
NPO-16140 B83-10702 08

ULTRASONICS
Speculation on Ultrasonic
Disintegration of Arterial Deposits
MFS-25161 B83-10600 05

ULTRAVIOLET RADIATION
Accelerated Solar-UV Test Chamber
NPO-15063 B83-10323 03

UMBILICAL CONNECTORS
Latching Mechanism for Umbilical
Connectors
MSC-20242 B83-10096 07

UNDERCARRIAGES
Locomotive Truck Dynamics
MFS-25872 B83-10390 06

UNDERWATER TESTS
Unmanned Instrument Platform for
Undersea Exploration
NPO-15878 B83-10526 02

UNIONS (CONNECTORS)
Reusable High-Pressure Connector
MSC-20339 B83-10097 07

USER REQUIREMENTS
SPIRE Data-Base Management
System
GSC-12684 B83-10737 09

V

VACUUM PUMPS
Cryogenic Vacuum Pump
NPO-15517 B83-10198 07

VACUUM SYSTEMS
Better Seals for Vacuum Bags
MFS-25875 B83-10216 08

VACUUM TESTS
Leak Test for Pressure-Sealing
Zippers
KSC-11247 B83-10654 06

VALUE ENGINEERING
Value-Engineering Review for
Numerical Control
MFS-19664 B83-10480 08

VALVES
Self-Cleaning Tubular-Membrane
Module
NPO-15245 B83-10100 07
Flow-Straightener Sleeve for Pump
Valve
MFS-19781 B83-10385 06
Double-Poppet Valve
MSC-20627 B83-10669 07
Triple-Seal Valve
MSC-20628 B83-10670 07
Motorized Cryogenic Valve
ARC-11452 B83-10687 07

VANADIUM COMPOUNDS
Charring, Nonmelting Epoxy Foams
MFS-25911 B83-10571 04

VAPOR DEPOSITION
Silicon Nitride Antireflection Coatings
for Photovoltaic Cells
ARC-11447 B83-10332 04

VAPOR TRAPS

Packed Alumina Absorbs Hypergolic Vapors

KSC-11278 B83-10569 04

VAPORIZING

Attitude Control by Localized

Outgassing

NPO-15575 B83-10113 08

VAX-11/780 COMPUTER

Security Package for the VAX

MSC-20423 B83-10246 09

VELOCITY DISTRIBUTION

Advances in Multivalued-Velocity

Theory of Turbulence

NPO-16006 B83-10622 06

VELOCITY MEASUREMENT

Measuring Ultrasonic Shear-Wave

Velocity

MFS-19680 B83-10058 06

Improved Laser Velocimeter

MFS-25465 B83-10312 03

VENTING

Fluid/Vapor Separator for Variable

Flow Rates

ARC-11401 B83-10299 03

VHSIC (CIRCUITS)

VLSI Unit for Two-Dimensional

Convolutions

NPO-15224 B83-10136 02

VIBRATION

Characterizing Shear Properties of

Membranes

MFS-25745 B83-10057 06

Time-Domain Modal Vibration

Identification

LAR-12924 B83-10072 06

Measuring Tension in Transistor

Suspensions

NPO-15677 B83-10128 01

Vibration-Isolation Bench for Testing

in Vacuum

GSC-12753 B83-10171 06

Estimating Design Loads in Coupled

Vibrating Structures

NPO-14872 B83-10182 06

Improvements in Vibration-Analysis

Technique

MFS-25919 B83-10621 06

Free-Vibration Analysis of Structures

NPO-15797 B83-10625 06

VIBRATION DAMPING

Low-Vibration Oscillating

Compressor

GSC-12799 B83-10658 07

VIBRATION ISOLATORS

Vibration-Isolation Bench for Testing

in Vacuum

GSC-12753 B83-10171 06

Heat-Pipe Thermal Switch

GSC-12644 B83-10384 06

Retrofitting Vibration Dampers

MFS-19790 B83-10685 07

VIBRATION MODE

Analyzing Vibrations in a Long Mast

MFS-25746 B83-10641 06

VIBRATORY LOADS

Suppressing Transient Side Loads in

Supersonic Nozzles

MFS-19769 B83-10379 06

VIDEO EQUIPMENT

Status Panel For Video Cassette

Recorders

KSC-11254 B83-10532 02

VIEWING

Monitoring Acoustically Levitated

Samples

NPO-15193 B83-10727 08

VISIBILITY

Viewer Makes Radioactivity 'Visible'

GSC-12640 B83-10027 03

VISUAL CONTROL

Controlling TV-Camera f-Stop

Remotely

KSC-11269 B83-10550 03

VISUAL PERCEPTION

Tracking Visible Targets

Automatically

NPO-15226 B83-10642 06

VOICE COMMUNICATION

Two-Wire to Four-Wire Audio

Converter

KSC-11256 B83-10003 01

VOIDS

Dielectric Scanning Locates Voids in

Glass Foam

NPO-15728 B83-10176 06

VOLT-AMPERE CHARACTERISTICS

Fast Electronic Solar Cell Tester

NPO-15676 B83-10011 02

Portable Data Logger for Photovoltaic

Panels

NPO-15158 B83-10139 02

VOLTAGE CONVERTERS (DC TO DC)

SCM Handbooks for dc-to-dc

Converters

LEW-13886 B83-10258 01

VOLUMETRIC ANALYSIS

Automated Mercury Dilatometer

NPO-14884 B83-10604 06

VORTEX AVOIDANCE

Antivortex Inlet Ribs for Fluid-Seals

MFS-19793 B83-10426 07

VORTICES

Vortex Lift Augmentation by Suction

LAR-12969 B83-10071 06

Calculating the Vortex Lift Effect of

Cambered Wings

LAR-12985 B83-10082 06

Multivalued-Velocity-Field Model of

Turbulence

NPO-15748 B83-10183 06

W**WAFERS**

Fracture Strength of Silicon Solar

Cells

NPO-15187 B83-10181 06

WALKING

Lightweight, Economical Device

Alleviates Drop Foot

LAR-12259 B83-10165 05

WALKING MACHINES

Adjustable Walker for the

Handicapped

LAR-12990 B83-10369 05

WARNING SYSTEMS

Remotely-Operated Traffic Control

Light

ARC-11406 B83-10512 01

WASHERS (SPACERS)

Belleville Spring/Seal

MFS-19596 B83-10653 06

WASHING

Pressure-Driven Waterflow Cleaning

Device

MFS-19638 B83-10679 07

WASTE DISPOSAL

Destroying Toxic Wastes

NPO-15655 B83-10582 04

WASTE TREATMENT

Flowthrough Bacteria-Detection

System

LAR-12871 B83-10164 05

WASTE UTILIZATION

Drying Milk With Boiler Exhaust

NPO-15923 B83-10297 03

WASTES

Generating SiF₄ From H₂SiF₆

NPO-15721 B83-10155 04

WATER FLOW

Pressure-Driven Waterflow Cleaning

Device

MFS-19638 B83-10679 07

WATER QUALITY

Automated Coliform Analysis

ARC-11322 B83-10368 05

WATER TREATMENT

Flowthrough Bacteria-Detection

System

LAR-12871 B83-10164 05

WATER VAPOR

Trace-Level Solid-Polymer Electrolyte

Hygrometer

NPO-15722 B83-10645 06

WATERPROOFING

Rewaterproofing Silica Tiles

MSC-20340 B83-10111 08

Waterproof Raised Floor Makes

Utility Lines Accessible

ARC-11363 B83-10605 06

WATTMETERS

Measuring Power Flow in Electric

Vehicles

NPO-15514 B83-10138 02

WAVE PROPAGATION

Acoustic Design Improves Composite

Impact Resistance

LAR-12887 B83-10375 06

WAVEGUIDE ANTENNAS

Estimating Waveguide Feed

Directivity and Spacing

NPO-15603 B83-10144 03

Fabricating Slotted-Waveguide

Arrays From Sheet Metal

NPO-15664 B83-10214 08

WAVEGUIDES

Fabricating Slotted-Waveguide

Arrays From Sheet Metal

NPO-15664 B83-10214 08

Polymer Bonding of Optical Fibers

NPO-15464 B83-10224 08

Cooling Waveguide Flanges in

Microwave Transmitters

NPO-15401 B83-10264 01

WEAR

Bearing Wear in Large Thermal

Gradients

MFS-25879 B83-10428 07

WEAR TESTS

Ball-and-Socket-Bearing Wear Test

MFS-19737 B83-10427 07

WEATHER DATA RECORDERS

Lightning-Transient Recorder

NPO-15895 B83-10272 02

WEATHER FORECASTING

Frost Forecasting for Fruitgrowers

KSC-11241 B83-10243 09

WEATHERPROOFING

Preventing Moisture Damage To

Solar Panels

NPO-15481 B83-10477 08

WEBS (SUPPORTS)

Proposed Technique of

Crystal-Ribbon Growth

NPO-15629 B83-10474 08

WEIGHT MEASUREMENT

Silicon-Film Growth by Continuous
Edge-Supported Melt Skimming
NPO-15532 B83-10731 08

WEIGHT MEASUREMENT

Portable Pallet-Weighing Apparatus
GSC-12789 B83-10066 06

WEIGHT REDUCTION

Minimizing Weight of Structural
Designs
LAR-13107 B83-10624 06

WEIGHTLESSNESS SIMULATION

Test Frame Simulates Zero Gravity
MFS-25518 B83-10637 06

WELD STRENGTH

Microfissuring in Nickel-Based-Alloy
Welds
MFS-25815 B83-10340 04

WELD TESTS

Checking Weld Composition
MFS-19628 B83-10481 08

WELDED JOINTS

Checking Surface Contours
MSC-20318 B83-10052 06

Welding Tubes In Place
MFS-25714 B83-10723 08

WELDING

Coil Welding Aid
MSC-20470 B83-10088 07

Electronic Force Gage for Welders
MFS-25798 B83-10172 06

Absorbable-Susceptor Welding of
Ceramics
NPO-15640 B83-10217 08

Repairing Defective Welds
MFS-19618 B83-10484 08

Controlling the Focus in
Electron-Beam Welders
MFS-19814 B83-10664 07

Automatic Guidance System for
Welding Torches
MFS-25807 B83-10690 08

Ribbon Reduces Spiking in
Electron-Beam Welding
MFS-19701 B83-10698 08

Automated Variable-Polarity
Plasma-Arc Welding
MFS-27042 B83-10722 08

Microfissuring in Alloys During
Welding
MFS-25604 B83-10725 08

WELDING MACHINES

Electronic Force Gage for Welders
MFS-25798 B83-10172 06

Welding Tubes In Place
MFS-25714 B83-10723 08

WHISKERS (CRYSTALS)

Electrolytic Sharpening of
Diode-Contact Whiskers
NPO-15789 B83-10222 08

WIND EFFECTS

Simulating Atmospheric Turbulence
MFS-25850 B83-10377 06

WIND TUNNEL MODELS

Two-Degree-of-Freedom Mount
System for Flutter Models
LAR-12950 B83-10062 06

WIND TUNNELS

Measuring Surface-Shear Stress in a
Wind Tunnel
ARC-11384 B83-10180 06

WIND TURBINES

Wind Turbine With Concentric Ducts
KSC-11191 B83-10086 07

Compressible Flow About Wind
Turbine Blades
LEW-13740 B83-10103 07

WINDOWS (APERTURES)

Monitoring Acoustically Levitated
Samples
NPO-15193 B83-10727 08

WINGS

Vortex Lift Augmentation by Suction
LAR-12969 B83-10071 06

Minimum Induced Drag of Nonplanar
Wings
LAR-12925 B83-10078 06

Fast Generation of
Boundary-Conforming O-Type Grids
LEW-13618 B83-10081 06

Calculating the Vortex Lift Effect of
Cambered Wings
LAR-12985 B83-10082 06

Compressible Stability Analysis Code
For Transition Prediction in Three
Dimensional Boundary Layers.
LAR-13042 B83-10188 06

Extended Vortex Lattice Method
LAR-13039 B83-10192 06

Interactive Graphics Analysis for
Aircraft Design
LAR-12951 B83-10194 06

WIRE

Improved Connector Shell for Cable
Shields
NPO-15584 B83-10006 01

Add-On Shielding for Unshielded
Wire
NPO-15107 B83-10007 01

Shielded Aluminum Flat-Conductor
Cable
MFS-25899 B83-10250 01

Stripper for Cables of Any Cross
Section
NPO-15631 B83-10443 07

WIRING

Cryogenic Pressure Seal for Wires
MFS-19668 B83-10376 06

WRENCHES

Locking Bolt
MSC-20439 B83-10202 07

A One-Hand Nut and Bolt Assembly
Tool
MFS-19691 B83-10677 07

X

X RAY DIFFRACTION

Computation of Bragg Reflection for
Layered Microstructures
NPO-15880 B83-10300 03

X-Ray-Diffraction Analysis of Nb/Ge
Alloys
MFS-27038 B83-10594 04

X RAY IMAGERY

X-Ray Detector for 1 to 30 keV
GSC-12682 B83-10008 01

Improved Gamma-and X-Ray Pinhole
Camera
GSC-12851 B83-10539 03

Lensless Image Scanner
NPO-16004 B83-10553 03

X RAY INSPECTION

X-Ray Inspection of Transistors
NPO-15675 B83-10225 08

X RAY TELESCOPES

High-Resolution X-Ray Telescope
NPO-15971 B83-10551 03

X RAYS

Normal-Incidence Soft-X-Ray Mirror
NPO-15828 B83-10145 03

SUBJECT INDEX

Isolating Supports for X-Ray Mirrors
MFS-25904 B83-10386 06

X-Y PLOTTERS

Portable X-Y Scanner
MFS-25687 B83-10411 07

Y

YEAST

Yeasts With Increased Glycogen
Levels
NPO-15571 B83-10601 05

Z

ZINC SULFIDES

Recovering Zinc From Discarded
Tires
NPO-16046 B83-10568 04


ZIPPER

Leak Test for Pressure-Sealing
Zippers
KSC-11247 B83-10654 06

ZONE MELTING

Toroidal Ellipsoid Float-Zone Heater
MFS-25771 B83-10711 08

Typical Personal Author Index Listing

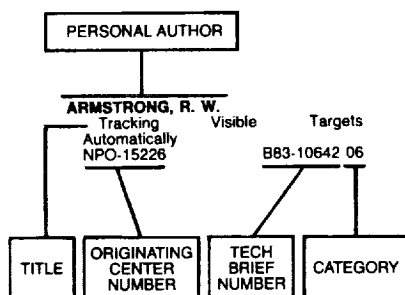

This index is arranged alphabetically by author. The Tech Brief title is listed followed by the originating Center number, e.g., NPO-11381. The Tech Brief number, e.g., B83-10642, is followed by a two-digit number, e.g., 06, which designates the subject category.

A

- AAEN, R.**
Solar Heating and Cooling
Development Program
MFS-27015 B83-10304 03
- ABDALLAH, S.**
Calculating the Flow Field in a Radial
Turbine Scroll
LEW-13437 B83-10104 07
- ABSHIRE, J. B.**
Self-Modulated Laser Rangefinder
GSC-12761 B83-10142 03
- ACKERMAN, P.**
Fatigue Testing of Heat-Exchanger
Tubes
MFS-19599 B83-10648 06
- ADAMS, M. A.**
Evaluation of Structural Cellular
Glass
NPO-15680 B83-10339 04
- ADAMS, T.**
Repairing Defective Welds
MFS-19618 B83-10484 08
- ADAMS, T. C.**
Retrofitting Vibration Dampers
MFS-19790 B83-10685 07
- AGRAWAN, A. K.**
Connecting Separate Computers to
a Common Bus
NPO-15433 B83-10289 02
- AHEARN, J. F.**
Electronic-Power-Transformer Design
Guide
LEW-13208 B83-10131 01

- ALAM, M. K.**
Silane Pyrolysis With Silicon-Seed
Aerosol
NPO-16054 B83-10591 04
- ALBERT, C.**
Probe Array for Testing
Printed-Circuit Substrates
GSC-12759 B83-10059 06
- ALBERT, J.**
Transonic Airfoil Analysis
ARC-11436 B83-10395 06
- ALCORN, G.**
X-Ray Detector for 1 to 30 keV
GSC-12682 B83-10008 01
- ALCORN, G. E.**
Schottky-Barrier Photocell With
Intermediate Metal Layer
GSC-12816 B83-10501 01
- ALLEN, J. L.**
Off-Resonance Acoustic Levitation
Without Rotation
NPO-15634 B83-10461 08
- AMBRISCO, D.**
Holding Tubes in Place for Brazing
MFS-19658 B83-10211 07
- AMBROSE, H. H.**
Eddy-Current Inspection of Narrow
Metal Tubes
MFS-19742 B83-10374 06
- ANDERSON, M. S.**
Panel Analysis and Sizing Code
LAR-13004 B83-10393 06
- ANDERSON, N. E.**
Designing More-Efficient Spur Gears
LEW-13921 B83-10662 07
- ANDERSON, T. O.**
Solid-State Crossbar Switch
NPO-15066 B83-10259 01
- ANDREWS, T. W.**
Continuous Monitoring of Melt
Composition
NPO-15896 B83-10574 04
- ANGULO, E. D.**
Transducer Joint for Kidney-Stone
Ultrasonics
GSC-12652 B83-10166 05
- APLIN, J.**
Vertical-Control Subsystem for
Automatic Coal Mining
MFS-25811 B83-10659 07
- APPEL, M. A.**
Rhenium Prevents Corrosion
NPO-15011 B83-10361 04
- APPLETON, A. J.**
Portable Power Broach
MFS-19679 B83-10678 07
- ARBINO, P.**
Holding Tubes in Place for Brazing
MFS-19658 B83-10211 07
- ARGOUD, M. J.**
Testing Large Solar Mirrors
NPO-15404 B83-10294 03

- ARMSTRONG, R. W.**
Tracking Visible Targets
Automatically
NPO-15226 B83-10642 06
- ARVESEN, J. C.**
Telemetry Speeds Forest-Fire
Control
ARC-11438 B83-10279 02
- ASH, J. P.**
Installation/Removal Tool for
Screw-Mounted Components
MSC-20606 B83-10667 07
- ASTON, G.**
Ion Accelerator Merges Several
Beams
NPO-15547 B83-10540 03
- ASTON, M. B.**
Improved Hollow Cathode
NPO-15560 B83-10555 03
- ASTON, M. B.**
Equations for
Automotive-Transmission Performance
NPO-15825 B83-10410 07
- ATHANS, D. P.**
Power-Measurement Errors Due to
Instrument Lag
NPO-15029 B83-10516 01
- AUSTIN, S. L.**
Software Specification Language
MFS-23737 B83-10244 09

B

- BAKER, D. J.**
Shear-Panel Test Fixture Eliminates
Corner Stresses
LAR-12930 B83-10383 06
- BAKER, G. E.**
Repairing Damaged Power-Cable
Insulation
KSC-11206 B83-10464 08
- BAKER, J. L.**
Inflatable Rescue Capsules
MFS-25677 B83-10372 05
- BALASUBRAHMANYAN, V.**
Silicone Cerenkov-Radiator Material
GSC-12805 B83-10328 04
- BALES, T. T.**
Curved Caps Raise Corrugation
Strength
LAR-12884 B83-10105 08
- BAMFORD, R. M.**
Estimating Design Loads in Coupled
Vibrating Structures
NPO-14872 B83-10182 06
- BAMFORD, R. M.**
Decoupling a Reflecting Layer From
Its Support Structure
NPO-15346 B83-10486 08
- BANKSTON, B. F.**
Portable X-Y Scanner
MFS-25687 B83-10411 07
- BARATH, F. T.**
Radar for Mapping Sea Ice
NPO-15350 B83-10135 02

BARBEE JR., T. W.

- Antenna for Imaging Sea Ice
NPO-15352 B83-10271 01
- BARBEE JR., T. W.**
Normal-Incidence Soft-X-Ray Mirror
NPO-15828 B83-10145 03
- BARBEE, T. W.**
Computation of Bragg Reflection for Layered Microstructures
NPO-15880 B83-10300 03
- BARBER, T. A.**
Pulse Response Yields Battery Charge State
NPO-14882 B83-10285 02
- BARMATZ, M. B.**
Acoustical-Levitation Chamber for Metallurgy
NPO-15453 B83-10117 08
Acoustic Levitation With Less Equipment
NPO-15562 B83-10118 08
Off-Resonance Acoustic Levitation Without Rotation
NPO-15634 B83-10461 08
Containerless-Processing Module
NPO-14932 B83-10479 08
Phase Modulation Stops Levitated Sample Rotation
NPO-16002 B83-10707 08
Acoustic-Levitation Chamber
NPO-16142 B83-10726 08
- BARNEY, J.**
Detecting Defective Solder Bonds
MFS-25507 B83-10260 01
- BARONE, F. E.**
Locomotive Truck Dynamics
MFS-25872 B83-10390 06
Continuous-Reading Cryogen Level Sensor
MFS-25873 B83-10611 06
- BARR, T. A.**
Improved Coal-Thickness Measurement
MFS-23721 B83-10284 02
- BARRON, O. L.**
Harmonic-Balance Algorithm for Nonlinear Systems
MFS-25821 B83-10239 09
- BASKHARONE, E.**
Calculating the Flow Field in a Radial Turbine Scroll
LEW-13437 B83-10104 07
- BASSETT, R. N.**
Low-Cost Alternatives in Hybrid Microcircuit Packaging
MFS-25809 B83-10236 08
- BATEMAN, W. A.**
Joining Tubes With Adhesive
MFS-25958 B83-10700 08
- BATES JR., E. T.**
Test Pattern for IC's
NPO-15648 B83-10232 08
- BAUER, P. E.**
More-Uniform Heat Curing for Structural Repairs
MSC-20101 B83-10114 08
- BAXTER, C. R.**
Reinforcement for Stretch Formed Sheet Metal
MSC-20228 B83-10108 08
- BAYLESS JR., E.**
Automated Variable-Polarity Plasma-Arc Welding
MFS-27042 B83-10722 08
- BEASLEY, J. L.**
Polyurethane Filler for Electroplating
MFS-19851 B83-10695 08

- BEATTY, R. F.**
Antivortex Inlet Ribs for Fluid-Seals
MFS-19793 B83-10426 07
- BEJCZY, A. K.**
Improving Control of Remote Manipulators
NPO-15049 B83-10018 02
Remote Manipulator Has Relistic 'Feel'
NPO-15065 B83-10083 07
Displaying Force and Torque of A Manipulator
NPO-15942 B83-10529 02
- BELLAN, J.**
Reducing Soot in Diesel Exhaust
NPO-15715 B83-10355 04
- BENIGUE, C. E.**
Security Package for the VAX
MSC-20423 B83-10246 09
- BERDAHL, C. M.**
Discriminating Between Liquid and Gas Flows
NPO-15531 B83-10050 06
Sun Tracker Operates a Year Between Calibrations
NPO-15810 B83-10546 03
- BERGMAN, L. A.**
Effect of Temperature on Fiber-Optic Delay
NPO-15148 B83-10318 03
Measuring Delay in Lasers
NPO-15242 B83-10558 03
- BERRY, R. L.**
Locomotive Truck Dynamics
MFS-25872 B83-10390 06
- BERSON, L. A.**
Staked Bearing Removal Tool
MSC-20337 B83-10093 07
Portable Roller Staking Tool
MSC-20281 B83-10208 07
Testing Bearings in Tight Spaces
MSC-20250 B83-10210 07
- BERTANI, J. A.**
Dissociated Airflow Effects During Plasma-Arc Testing
MSC-20522 B83-10185 06
- BIANCHI, C.**
Probe Array for Testing Printed-Circuit Substrates
GSC-12759 B83-10059 06
- BICKLER, D. B.**
Plated Metal Powders for Electrode Pastes
NPO-15161 B83-10360 04
- BICKNELL, T. J.**
Eliminating Doppler Effects in Synthetic-Aperture Radar Optical Processors
NPO-14998 B83-10291 02
- BIDDLE, A.**
Automated Variable-Polarity Plasma-Arc Welding
MFS-27042 B83-10722 08
- BIEDEBACH, B. L.**
Electric-Power System Simulator
NPO-15515 B83-10288 02
- BILLINGTON, K. L.**
Reducing the Resistance of Conductive-Adhesive Bonds
MSC-20427 B83-10219 08
- BILLITTI, J. W.**
Add-On Shielding for Unshielded Wire
NPO-15107 B83-10007 01
- BIRD, R. G.**
Staked Bearing Removal Tool
MSC-20337 B83-10093 07

PERSONAL AUTHOR INDEX

- Portable Roller Staking Tool
MSC-20281 B83-10208 07
Tool for Replacing Bushings
MSC-20282 B83-10209 07
Testing Bearings in Tight Spaces
MSC-20250 B83-10210 07
- BJORKLUND, R. A.**
Flame-Test Chamber
NPO-15407 B83-10719 08
- BLANCHARD, D. K.**
Boundary-Layer Equations for Two-Dimensional and Axisymmetric Flow
LAR-13015 B83-10080 06
- BLOM, K. A.**
Flow Chart for Management
NPO-15014 B83-10492 09
- BLOSIU, J. O.**
Information-Systems Data-Flow Diagram
NPO-15492 B83-10121 09
- BLOW, R. K.**
Ice as an Abrading Agent
MFS-19837 B83-10693 08
- BLUCK, R. M.**
Fabrication of Graphite/Epoxy Column Elements
LAR-12915 B83-10115 08
- BOETTGER, H. G.**
Monitoring Lignin Content in Paper Processing
NPO-15796 B83-10350 04
- BOSWELL, B. E.**
Locking Bolt
MSC-20439 B83-10202 07
- BOUQUET, F. L.**
Glass for Solar Concentrators
NPO-14923 B83-10354 04
Radiation Improves Materials Bonding
NPO-14995 B83-10364 04
- BOWLES, J.**
General Aviation Synthesis Program
ARC-11434 B83-10396 06
- BRACCHI, F.**
Microprocessor-Based Wave Analyzer
ARC-11388 B83-10046 05
- BRADLEY, D. P.**
Belleville Spring/Seal
MFS-19596 B83-10653 08
- BRADLEY, J. W.**
Electronic Force Gage for Welders
MFS-25798 B83-10172 06
- BRADSHAW, E. S.**
Demodulator for AM and SSB-SC Signals
LAR-12716 B83-10509 01
- BRECKINRIDGE, J. B.**
Electronically-Scanned form Spectrometer
NPO-15844 B83-10292 02
Holographic Twyman-Green Interferometer
NPO-15754 B83-10301 03
- BRISSETTE, R.**
Coaxial Redundant Drives
MFS-25171 B83-10197 07
- BROCKMAN, M. H.**
Receiver for Antenna Arrays
NPO-15089 B83-10015 02
Radio-Frequency and Wideband Modulation Arraying
NPO-15030 B83-10283 02
Frequency-Diversity Reception for Phase Modulation
NPO-15040 B83-10290 02

- BROOKS, R.**
Automated Coliform Analysis
ARC-11322 B83-10368 05
- BROOKS, W.**
Passive Module for Cryogenic Refrigeration
ARC-11263 B83-10401 06
- BROUSSARD, M. R.**
Drying Milk With Boiler Exhaust
NPO-15923 B83-10297 03
- BROWN, G. S.**
Fluid/Vapor Separator for Variable Flow Rates
ARC-11401 B83-10299 03
- BROWN, J.**
Digital Control of Analog Detector
MFS-19608 B83-10514 01
- BROWN, J. A.**
KSC Construction Cost Index
KSC-11252 B83-10241 09
Conceptual Cost Estimating
KSC-11253 B83-10242 09
- BROWN, J. H.**
Phase Modulation Stops Levitated Sample Rotation
NPO-16002 B83-10707 08
- BROWN, J. K.**
Heater Ensures Strain-Gage Bond Reliability
MFS 19859 B83-10619 06
- BROWN, S. F.**
Radiation-Hardness Data For Semiconductor Devices
NPO-15787 B83-10507 01
- BROWN, W.**
Printed Circuit Converts RF Energy to dc Power
LEW-13913 B83-10002 01
- BROWN, W. C.**
Fabricating Slotted-Waveguide Arrays From Sheet Metal
NPO-15664 B83-10214 08
- BROWN, W. H.**
Reduced Aircraft-Engine Noise
LAR-12890 B83-10048 06
- BRYAN, D. A.**
Fabricating Grating Couplers on Optical Fibers
MSC-20286 B83-10019 03
- BUCHANAN, E.**
Servo Lead Compensation
MFS-19614 B83-10513 01
- BUCKLES, B. P.**
Software Specification Language
MFS-23737 B83-10244 09
- BUCKLEY, J. D.**
Hot-Melt Adhesive Attachment System
LAR-12894 B83-10109 08
- BUGGLE, R. N.**
Digital Soldering-Iron Tester
MFS-25863 B83-10254 01
Improving Trace-Ion Sensitivity
MFS-25766 B83-10333 04
- BULDHAUPT, L.**
Screening Plastic-Encapsulated Solid-State Devices
MFS-25802 B83-10506 01
- BUMGARDNER, G. S.**
Low-Weight Inserts for Aluminum Honeycomb Panels
MSC-20227 B83-10116 08
- BUNKER, J. W.**
Reusable Release Mechanism
MSC-20080 B83-10666 07
- BURGER, D. R.**
Better Thermal Insulation in Solar-Array Laminators
NPO-15925 B83-10451 08
Optimizing Grid Patterns on Photovoltaic Cells
NPO-15841 B83-10709 08
- BURKE, J. D.**
Self-Righting Objects
NPO-15023 B83-10399 06
- BURKS, H. D.**
Aromatic Polyimides With Group VI Linkages
LAR-12980 B83-10031 04
- BURLEY, R. K.**
Electrochemical Deburring
MFS-19693 B83-10087 07
Hydraulic Tube Expander
MFS-19731 B83-10682 07
- BURNER JR., A. W.**
Laser Diode Schlieren Photography
LAR-12897 B83-10559 03
- BURNS JR., M.**
Automatic Guidance System for Welding Torches
MFS-25807 B83-10690 08
- BURNS, B. S.**
Inspecting Joints With Grooved Surfaces
MFS-25934 B83-10640 06
- BURNS, G. C.**
Latching Mechanism for Umbilical Connectors
MSC-20242 B83-10096 07
- BURNS, R.**
Transportable Pumps Could Save Oil Cargoes
MFS-25881 B83-10660 07
- BUROW, G. H.**
Wire Retrieves Broken Pin
MFS-19768 B83-10415 07
- BURR, M. E.**
Calculating Static-Seal Leakage Correlation
MFS-19674 B83-10175 06
- BUSHNELL, D.**
Submicron-Particle Generator
LAR-12785 B83-10646 06
- BUTLER, L. V.**
Testing Large Solar Mirrors
NPO-15404 B83-10294 03
- BUTMAN, S. A.**
Sideband-Aided Receiver Arrays
NPO-15873 B83-10522 02
- BYRNES, D. V.**
Planning Transport and Manufacturing for Lowest Cost
NPO-15391 B83-10123 09
- BYVIK, C. E.**
Determining the Point of Zero Zeta Potential in Solid Samples
LAR-12893 B83-10026 03
- C**
- CAFFERTY, T.**
High-Absorptance Radiative Heat Sink
GSC-12739 B83-10110 08
- CAGLIOSTRO, D. E.**
Stronger Carbon Fibers for Reinforced Plastics
ARC-11261 B83-10035 04
- CALDWELL, R. W.**
Electric-Power System Simulator
NPO-15515 B83-10288 02
- CALVERT, J.**
Self-Locating Latch
MFS-25956 B83-10446 07
- CAMPBELL, C. W.**
Generating Random Number Pairs
MFS-27039 B83-10496 09
- CAMPBELL, R. B.**
Ti/Pd/Cu Contacts for Semiconductor Devices
NPO-15043 B83-10268 01
- CAMPBELL, W.**
Stability Test for Transient-Temperature Calculations
MFS-25803 B83-10381 06
- CARLSON, H. W.**
Wing Subsonic Aerodynamic Performance Estimates
LAR-12987 B83-10079 06
- CARNAHAN, D. C.**
High Power Switching Transistor
LEW-13728 B83-10127 01
- CARPENTER, I.**
Additional Heat Treatment for Silica-Fiber Insulation
MSC-20600 B83-10588 04
- CARSLEY, R. B.**
Retractable Rotating Door Latch
MSC-20304 B83-10201 07
- CARUSO, S. V.**
Standards for Epoxies Used in Microelectronics
MFS-25810 B83-10042 04
Low-Cost Alternatives in Hybrid Microcircuit Packaging
MFS-25809 B83-10236 08
- CASH, B.**
Detection of Floating Inputs in Logic Circuits
LAR-13073 B83-10528 02
- CASSIDENTI, M.**
Electroformed Electrodes for Electrical-Discharge Machining
MFS-19651 B83-10715 08
- CASTILLO, A. A.**
Foil Panel Mirrors for Nonimaging Applications
GSC-12751 B83-10449 08
- CHAFEY, D.**
Improving A Guarded Hotplate
MSC-20447 B83-10069 06
- CHAMBERLAIN III, F. R.**
Monitoring Acoustically Levitated Samples
NPO-15193 B83-10727 08
- CHAMBERLAIN, F. R.**
Containerless-Processing Module
NPO-14932 B83-10479 08
- CHAMPION, V. L.**
Low-Cost Alternatives in Hybrid Microcircuit Packaging
MFS-25809 B83-10236 08
- CHAN, P.**
Supercritical-Multiple-Solvent on From Coal
NPO-15767 B83-10153 04
- CHANDRAMOULI, R.**
Finding Open Faults In CMOS Circuits
NPO-15838 B83-10504 01
- CHANG, J. F.**
Calculating the Vortex Lift Effect of Cambered Wings
LAR-12985 B83-10082 06

CHAPMAN, C. P.

CHAPMAN, C. P.
Pulse Response Yields Battery
Charge State
NPO-14882 B83-10285 02
Equations for
Automotive-Transmission Performance
NPO-15825 B83-10410 07

CHASE, R. C.
High-Resolution X-Ray Telescope
NPO-15971 B83-10551 03

CHAZANOFF, S.
Equations for
Automotive-Transmission Performance
NPO-15825 B83-10410 07

CHEN, B. C.
Cooling Waveguide Flanges in
Microwave Transmitters
NPO-15401 B83-10264 01

CHEN, C. P.
Fracture Strength of Silicon Solar
Cells
NPO-15187 B83-10181 06

CHEN, C. W.
Holographic Twyman-Green
Interferometer
NPO-15754 B83-10301 03
Efficiency of Reflection Gratings
NPO-15852 B83-10567 03

CHEN, E.
Frost Forecasting for Fruitgrowers
KSC-11241 B83-10243 09

CHEN, J. C.
Methods for Estimating
Payload/Vehicle Design Loads
NPO-15550 B83-10184 06
Accuracy Criterion for Structural
Calculations
NPO-16008 B83-10634 06

CHEN, T. S.
Perfluoroalkylene-Ether Triazine
Elastomers
ARC-11402 B83-10335 04

CHEN, W.
Theory for Eccentric and Misaligned
Annular Seals
MFS-19892 B83-10652 06

CHEN, W. C.
Antivortex Inlet Ribs for Fluid-Seals
MFS-19793 B83-10426 07

CHENG, C.
Perfluoroalkylene-Ether Triazine
Elastomers
ARC-11402 B83-10335 04

CHENG, H.
Thermal Elastohydrodynamic
Lubrication of Spur Gears
LEW-13528 B83-10213 07

CHERBONNEAUX, J. W.
Telemetry Speeds Forest-Fire
Control
ARC-11438 B83-10279 02

CHIOU, A. E.
Directional Coupler With Increased
Directivity
NPO-15892 B83-10252 01

CHRISTIAN, S.
Retaining-Ring Installation Tool
MFS-19725 B83-10098 07

CHUANG, C.
Fluid/Vapor Separator for Variable
Flow Rates
ARC-11401 B83-10299 03

CHUBB, C. R.
Fabricating Grating Couplers on
Optical Fibers
MSC-20286 B83-10019 03

CHUNG, D.
Test Frame Simulates Zero Gravity
MFS-25518 B83-10637 06

CHUNG, W.
Estimating Pump Blockage
MFS-19763 B83-10414 07

CHURCHILL, G. B.
Feedback Control of Rotor
Overspeed
ARC-11404 B83-10668 07

CIANA, J. J.
Cryogenic Pressure Seal for Wires
MFS-19668 B83-10376 06

CIZMECIOGLU, M.
Measuring Epoxy-Curing Kinetics
NPO-15710 B83-10152 04
Estimating the Lifetimes of
Nickel/Cadmium Cells
NPO-15145 B83-10576 04

CLARK, B. J.
Predicting Aircraft Noise Levels
LEW-13778 B83-10077 06

CLARK, K. H.
Conical Electrical Connectors Align
Easily
MFS-25211 B83-10251 01
Latch for Stored Cargo
MFS-25837 B83-10407 07
Clamp for Attaching Equipment to an
I-Beam
MFS-25510 B83-10429 07

CLARK, M. C.
Coil Welding Aid
MSC-20470 B83-10088 07

CLELAND, E. L.
Freeze/Thaw Properties of Cellular
Glass
NPO-15854 B83-10162 04
Airlock Entry
NPO-15415 B83-10720 08

CLEMONS, J.
Polycarbosilazane-Resin
on Process
MFS-25758 B83-10330 04
SixNyCz Fibers for Safer
Composites
MFS-25721 B83-10331 04
Predicting Thermal Conductivity
MFS-25732 B83-10400 06
Frame Allines Fibers in Multilayer
Composites
MFS-25959 B83-10706 08

CLEMONS, J. M.
Sample Holder for Cryogenic
Adhesive Shear Test
MFS-25729 B83-10060 06
Better Seals for Vacuum Bags
MFS-25875 B83-10216 08
Attaching Strain Gages to Composite
Materials
MFS-25867 B83-10378 06
Modified Oscillograph for Impacting
Composite Materials
MFS-25901 B83-10406 06
Speculation on Ultrasonic
Disintegration of Arterial Deposits
MFS-25161 B83-10600 05

CLOYD, R. A.
Retention Mechanism for Spinning
Objects
MFS-25957 B83-10674 07

CODY, J. C.
Low-Pressure Alcohol Distillation
MFS-25516 B83-10345 04

PERSONAL AUTHOR INDEX

COE, C. F.
Electronically-Scanned Pressure
Sensors
ARC-11361 B83-10387 06

COHEN, J. G.
Collecting Light From Point Images
NPO-15887 B83-10542 03

COHEN, L. M.
Isolating Supports for X-Ray Mirrors
MFS-25904 B83-10386 06

COHEN, M. M.
Waterproof Raised Floor Makes
Utility Lines Accessible
ARC-11363 B83-10605 06

COLBERG, W. R.
Walnut Hulls Clean Aluminum
MFS-27012 B83-10344 04

COLE, S. W.
Portable Data Logger for Photovoltaic
Panels
NPO-15158 B83-10139 02
Improved High-Current Drive Circuit
NPO-14938 B83-10269 01

COLLIER, S. M.
Checking Weld Composition
MFS-19628 B83-10481 08

COLLINS JR., E. R.
Automated Coal-Mine Shuttle Car
NPO-15850 B83-10417 07
Shuttle-Car System for Continuous
Mining
NPO-15949 B83-10418 07
Mechanical Coal-Face Fracturer
NPO-15847 B83-10419 07

COLLINS, W. G.
Shielding Electric Connectors From
Lightning
NPO-15688 B83-10511 01

CONSTANTINES, N. J.
Eliminating Doppler Effects in
Synthetic-Aperture Radar Optical
Processors
NPO-14998 B83-10291 02

CONVERSE, G. L.
Off-Design Turbine Modeling
LEW-13674 B83-10195 06

COOPER, T.
Microcomputer Multiplexes
Alphanumeric Labels on CRT's
MSC-20079 B83-10132 02

COOPER, T. G.
Heart-Rate and Breath-Rate Monitor
MSC-20078 B83-10045 05

COPENHAVER, R. L.
Long Heat Pipe Transports 2.6 kW
NPO-16017 B83-10608 06

CORCORAN, W.
Supercritical-Multiple-Solvent
on From Coal
NPO-15767 B83-10153 04

CORTES, R. G.
Plastic Clamp Retains Clevis Pin
MFS-19747 B83-10207 07

COTHRAN, E.
Thermal Modeling of Bridgman
Crystal Growth
MFS-27003 B83-10237 08

COUCH, R. H.
Hot-Melt Adhesive Attachment
System
LAR-12894 B83-10109 08
Miniature Temperature-Control
Circuit
LAR-12900 B83-10515 01

- COULTRIP, R. H.**
Hot-Melt Adhesive Attachment System
LAR-12894 B83-10109 08
- COVINGTON III, E. W.**
Cryogenic Separation of a Ceramic From Its Mandrel
LAR-12904 B83-10717 08
- COYLE, P. J.**
Labeling Solar-Cell Modules
NPO-15997 B83-10454 08
- CRAMER, P. W.**
Estimating Waveguide Feed Directivity and Spacing
NPO-15603 B83-10144 03
Stripline Antenna Beam-Forming Network
NPO-15743 B83-10503 01
- CRAMP, J. A.**
Digital Phase-Shift Standard
KSC-11250 B83-10001 01
- CROOM, C. C.**
Identifying Boundary-Layer Transitions on Aircraft Skin
LAR-13089 B83-10609 06
- CROONQUIST, A.**
Attitude Control by Localized Outgassing
NPO-15575 B83-10113 08
Contactless Measurement of Physical Properties
NPO-15839 B83-10296 03
- CROONQUIST, A. P.**
Phase Modulation Varies Average Acoustic Torque
NPO-15689 B83-10227 08
- CROUSE, J. E.**
Design of Multistage Axial-Flow Compressors
LEW-13505 B83-10191 06
- CULLER, V. H.**
Automated Mercury Dilatometer
NPO-14884 B83-10604 06
- CURRIE, J. R.**
Circuitry for Angle Measurements
MFS-25825 B83-10137 02
- D**
- DABNEY, R. W.**
Digital Single-Phase Power-Factor Controller
MFS-25861 B83-10125 01
- DALY, D.**
Extracting Oil From Tar Sands
NPO-15760 B83-10349 04
- DAMARIO, L. A.**
Planning Transport and Manufacturing for Lowest Cost
NPO-15391 B83-10123 09
- DANIEL, I.**
Fabrication of Multi-Ply Birefringent Fibrous Composite Laminates
LAR-12960 B83-10704 08
- DANIELS, C. M.**
Controlling Heat-Exchanger Outlet Temperature
MFS-19667 B83-10170 06
Calculating Static-Seal Leakage Correlation
MFS-19674 B83-10175 06
- DANIELS, J.**
Modified Oscillograph for Impacting Composite Materials
MFS-25901 B83-10406 06
- Frame Allines Fibers in Multilayer Composites
MFS-25959 B83-10706 08
- DANKOWSKI, J. C.**
Vibration-Isolation Bench for Testing in Vacuum
GSC-12753 B83-10171 06
- DASTOOR, M. N.**
Yeasts With Increased Glycogen Levels
NPO-15571 B83-10601 05
- DAUD, T.**
Oscillating-Crucible Technique for Silicon Growth
NPO-15938 B83-10455 08
- DAUGHERTY, C.**
Portable Fatigue-Testing Machine
MFS-19459 B83-10649 06
- DAVENPORT, M. L.**
Heater Ensures Strain-Gage Bond Reliability
MFS 19859 B83-10619 06
- DAVIDSON, R. B.**
Toroidal Ellipsoid Float-Zone Heater
MFS-25771 B83-10711 08
- DAVIS, J. H.**
X-Ray-Diffraction Analysis of Nb/Ge Alloys
MFS-27038 B83-10594 04
- DAVIS, J. M.**
High-Resolution X-Ray Telescope
NPO-15971 B83-10551 03
- DAVIS, R. C.**
Curved Caps Raise Corrugation Strength
LAR-12884 B83-10105 08
- DAY, R. M.**
Portable Pallet-Weighing Apparatus
GSC-12789 B83-10066 06
- DECKER, H. J.**
Detecting Defective Solder Bonds
MFS-25507 B83-10260 01
- DEIS, B. C.**
Lightweight, Economical Device Alleviates Drop Foot
LAR-12259 B83-10165 05
- DELANO, C. B.**
Charring, Nonmelting Epoxy Foams
MFS-25911 B83-10571 04
- DENNISON, E. W.**
Testing Large Solar Mirrors
NPO-15404 B83-10294 03
- DEUTSCH, L. J.**
Virtual-Center Antenna-Arraying System
NPO-15874 B83-10273 02
Sideband-Aided Receiver Arrays
NPO-15873 B83-10522 02
- DI CENZO, A. E.**
Processing of Synthetic-Aperture-Radar Data
NPO-15316 B83-10488 09
- DICKERSON, G. E.**
Process for Molding Nonreinforced (Neat) Resins
LAR-12981 B83-10038 04
- DILLARD, P. A.**
Handling Fixture for Solar-Cell Arrays
NPO-15908 B83-10450 08
- DOBSON, R. K.**
Hot Forming With Electron-Beam Welder
MSC-20413 B83-10724 08
- DOLLAND, C.**
Controlling An Inverter-Driven Three-Phase Motor
MFS-25215 B83-10510 01
- DONOHUE, K.**
Silicon Nitride Antireflection Coatings for Photovoltaic Cells
ARC-11447 B83-10332 04
- DORWARD, R. C.**
Stress Corrosion Cracking of Certain Aluminum Alloys
MFS-25773 B83-10160 04
- DOTSON, R. S.**
Displaying Force and Torque of A Manipulator
NPO-15942 B83-10529 02
- DOUGHERTY, F. C.**
Transonic Airfoil Analysis
ARC-11436 B83-10395 06
- DOWLER, W. L.**
Binder for Carbon-Fiber Coating
NPO-14988 B83-10579 04
- DOZOIS, P. C.**
Repairable Encapsulated Electronic Modules
NPO-15079 B83-10703 08
- DRAUCH, J.**
Solidifying Bi/MnBi at Low Gravity
MFS-25736 B83-10044 04
- DRUMMOND JR., R. W.**
Photovoltaic Roofs
NPO-15881 B83-10453 08
- DU FRESNE, E. R.**
Evaporation Tower With Prill Nozzles
NPO-15609 B83-10322 03
Removing Biostatic Agents From Fermentation Solutions
NPO-15806 B83-10370 05
Recovering Zinc From Discarded Tires
NPO-16046 B83-10568 04
- DUBBLE, E. H.**
Long Heat Pipe Transports 2.6 kW
NPO-16017 B83-10608 06
- DUESBERG, J.**
Repairing Hidden Cracks in Coolant Tubes
MFS-19796 B83-10689 08
- DULIKRAVICH, D. S.**
Shock Free Airfoil Cascades
LEW-13842 B83-10076 06
Fast Generation of Boundary-Conforming O-Type Grids
LEW-13818 B83-10081 06
Compressible Flow About Wind Turbine Blades
LEW-13740 B83-10103 07
Steady, Nonrotating, Blade-to-Blade Potential Transonic Cascade Flow Analysis Code
LEW-13854 B83-10189 06
- DUMAS, K. A.**
Oscillating-Crucible Technique for Silicon Growth
NPO-15938 B83-10455 08
- DUNCAN, C. S.**
Melt-Level Sensing in Silicon-Web Growth
NPO-15356 B83-10473 08
- DUNCAN, R. S.**
Tool for Taking Clay Impressions
MFS-19728 B83-10435 07
- DUNN, E. G.**
Interstitial Collimating Holes for Gas-Levitation Microfurnace
MFS-25829 B83-10460 08

DUNN, S. A.

- DUNN, S. A.**
Sonic-Pump Levitator
MFS-25828 B83-10462 08
- DURLING, B. J.**
Panel Analysis and Sizing Code
LAR-13004 B83-10393 06

E

- EASTERLING, M. F.**
Receiver for Antenna Arrays
NPO-15089 B83-10015 02
- EASTMAN, A. F.**
Measuring Elastic Modulus of Sintered Metal
NPO-15589 B83-10055 06
- EDWARDS, D. B.**
Using a PFET To Commutate an SCR
NPO-15282 B83-10253 01
- Simplified High-Power Inverter
NPO-15961 B83-10499 01
- Energy-Saving Inverter
NPO-15291 B83-10500 01
- EDWARDS, H. B.**
Lenseless Scanning Telescope
LAR-12648 B83-10022 03
- EDWARDS, T. R.**
Digital Filters for Two-Dimensional Data
MFS-25790 B83-10240 09
- Interstitial Digital-Image-Point Generator
MFS-25871 B83-10525 02
- EHLAND, J.**
Probe Array for Testing Printed-Circuit Substrates
GSC-12759 B83-10059 06
- EHRET, R. M.**
Bonded Lockstitch for Insulating Blankets
MSC-20283 B83-10688 08
- ELLEMAN, D.**
Low-Density High-Strength Foamed Materials
NPO-15411 B83-10575 04
- ELLEMAN, D. D.**
Attitude Control by Localized Outgassing
NPO-15575 B83-10113 08
- Acoustical-Levitation Chamber for Metallurgy
NPO-15453 B83-10117 08
- Phase Modulation Varies Average Acoustic Torque
NPO-15689 B83-10227 08
- Electrostatic Levitator With Feedback Control
NPO-15553 B83-10228 08
- Contactless Measurement of Physical Properties
NPO-15839 B83-10296 03
- ELLIOTT, D. G.**
Staging Two-Phase Turbines
NPO-15037 B83-10444 07
- ELLIOTT, J.**
Solutions of Transonic Flow in Turbomachines
LEW-13896 B83-10186 06
- ELMORE, N. L.**
Liquid-Oxygen-Compatible Cement for Gaskets
MFS-19797 B83-10466 08

- ELWELL, D.**
Interface Instability During Crystal Growth
MFS-25841 B83-10468 08
- ELY, R. M.**
Aromatic Polyimides With Group VI Linkages
LAR-12980 B83-10031 04
- ENG, S. T.**
Effect of Temperature on Fiber-Optic Delay
NPO-15148 B83-10318 03
- ENGELS, R. C.**
Improvements in Vibration-Analysis Technique
MFS-25919 B83-10621 06
- ENO, R. F.**
Flip-Flop Digital Modulator
MSC-20334 B83-10505 01
- ERICKSON, E.**
Leak Test for Pressure-Sealing Zippers
KSC-11247 B83-10654 06
- ERICKSON, J.**
Optical Testing of Integrated Circuits
MFS-25498 B83-10508 01
- ERICKSON, J. A.**
Launch-Window Program
GSC-12801 B83-10628 06
- General Maneuver Program
GSC-12802 B83-10630 06
- ERKES, J. W.**
Instrumented Pick Detects Coal/Rock Interface
MFS-25753 B83-10065 06
- ERMLICH, J.**
Electronic Dilatometer
GSC-12738 B83-10168 06
- ERNST, D. M.**
Long Heat Pipe Transports 2.6 kW
NPO-16017 B83-10608 06
- ESKENAZI, R.**
Integrated Tactile Sensor for Robots
NPO-15094 B83-10610 06
- ESTEY, R. S.**
Pyreheliometer With Improved Accuracy
NPO-15398 B83-10143 03
- ETHRIDGE, E. C.**
Interstitial Collimating Holes for Gas-Levitation Microfurnace
MFS-25829 B83-10460 08
- Sonic-Pump Levitator
MFS-25828 B83-10462 08
- Rapid Circuit Breadboarding
MFS-25761 B83-10470 08
- EULER JR., H. C.**
Least-Squares Prediction of Solar Activity
MFS-25870 B83-10303 03
- EVANS JR., N. L.**
Beam Splitter Introduces Little Aberration
NPO-15580 B83-10028 03
- EVANS, J.**
General-Purpose Icosahedral Structure
GSC-12854 B83-10612 06
- EVANS, L. G.**
Neutron Probe of Building-Wall Composition
GSC-12808 B83-10541 03

PERSONAL AUTHOR INDEX

F

- FANSELOW, J. L.**
A File Archival System
NPO-16274 B83-10735 09
- FARINA, S.**
Shielded Aluminum Flat-Conductor Cable
MFS-25899 B83-10250 01
- FARLEY, G. L.**
Shear-Panel Test Fixture Eliminates Corner Stresses
LAR-12930 B83-10383 06
- In Situ Composite Fastener
LAR-12939 B83-10463 08
- FARMER, M. G.**
Two-Degree-of-Freedom Mount System for Flutter Models
LAR-12950 B83-10062 06
- FARRELL JR., C. A.**
Flow Through a Rotating Turbomachinery Blade Row
LEW-13832 B83-10102 07
- FEDORS, R. F.**
Measuring Elastic Modulus of Sintered Metal
NPO-15589 B83-10055 06
- Predicting Sintered-Metal Resistivity From Porosity
NPO-15587 B83-10158 04
- Cracks in Glass Polymers Induced by Solvent Absorption
NPO-15072 B83-10161 04
- Estimating the Lifetimes of Nickel/Cadmium Cells
NPO-15145 B83-10576 04
- FEIGELSON, R. S.**
Interface Instability During Crystal Growth
MFS-25841 B83-10468 08
- FEILER, C. W.**
Repairing Thermal Tiles
MSC-20336 B83-10712 08
- FENG, I. A.**
Producing Metallic Glasses With Acoustic Levitation
NPO-15658 B83-10231 08
- FERNQUIST, A.**
Transonic Airfoil Analysis
ARC-11436 B83-10395 06
- FERRALL, J. F.**
Molten Slag Would Boost Coal Conversion
NPO-15711 B83-10327 04
- FETTERS, R.**
Preventing Motor Damage Due to Rapid Reversal
MFS-19702 B83-10676 07
- FINNERTY, A. A.**
Gas-Bearing Crucible for Shot Tower
NPO-15070 B83-10229 08
- FISH, D.**
Vertical-Control Subsystem for Automatic Coal Mining
MFS-25811 B83-10659 07
- FISH, R. B.**
Vertical-Control Subsystem for Automatic Coal Mining
MFS-25811 B83-10659 07
- FITZGERALD, D. J.**
Less-Costly Ion Implantation of Solar Cells
NPO-15511 B83-10699 08

- FLAGAN, R. C.**
Silane Pyrolysis With Silicon-Seed Aerosol
NPO-16054 B83-10591 04
- FLEENOR JR., E. N.**
Tooling Converts Stock Bearings To Custom Bearings
LAR-12922 B83-10090 07
- FLEURY, C.**
Minimizing Weight of Structural Designs
LAR-13107 B83-10624 06
- FLORES, A.**
Quality-Planning-Requirements
MSC-20280 B83-10233 08
- FLORES, R.**
Portable Plating System
MFS-19631 B83-10483 08
- FLOWERS, C. E.**
Controlling Sanding Depth
MFS-19713 B83-10438 07
- FLOWERS, J.**
Recycling Lithium Carbonate/Lithium Hydroxide Waste
KSC-11261 B83-10033 04
Recycling Lithium Carbonate/Lithium Hydroxide Waste
KSC-11261 B83-10033 04
- FOHLEN, G. M.**
Elastomer-Modified Polyimides
ARC-11400 B83-10336 04
Improved Thermosetting Imide Resins
ARC-11368 B83-10341 04
- FONG, W.**
Supercritical-Multiple-Solvent on From Coal
NPO-15767 B83-10153 04
- FORD, L. B.**
Extracting Oil From Tar Sands
NPO-15760 B83-10349 04
- FOSS JR., W. E.**
The Mission Radius and Maneuverability Characteristics of Fighter Aircraft
LAR-12908 B83-10631 06
Takeoff and Landing of Transport Aircraft
LAR-13086 B83-10633 06
- FOX, E.**
Continuous-Reading Cryogen Level Sensor
MFS-25873 B83-10611 06
- FOX, L. B.**
Improved Polyimide Intumescent Coating
ARC-11369 B83-10338 04
- FOX, R. L.**
Hot-Melt Adhesive Attachment System
LAR-12894 B83-10109 08
- FRANK, H. A.**
Estimating the Solubility of Gases in Battery Electrolytes
NPO-15610 B83-10321 03
- FRANKE, J. M.**
Laser Diode Schlieren Photography
LAR-12897 B83-10559 03
- FRASCH, W.**
Ultrasonic Bonding of Solar-Cell Leads
NPO-16140 B83-10702 08
- FRAUENHOLZ, R. B.**
Mathematical Simulation of Flight Maneuvers
NPO-15395 B83-10644 06
- FRAZER, R. E.**
Continuous Monitoring of Melt Composition
NPO-15896 B83-10574 04
- FRAZIER, D. O.**
Low-Pressure Alcohol Distillation
MFS-25516 B83-10345 04
- FREDERKING, T. H.**
Fluid/Vapor Separator for Variable Flow Rates
ARC-11401 B83-10299 03
- FREEMAN JR., W. T.**
In Situ Composite Fastener
LAR-12939 B83-10463 08
- FREEMAN, M.**
Partial-Payload Support Structure
MFS-25485 B83-10647 06
- FRICK, J.**
Transonic Airfoil Analysis
ARC-11436 B83-10395 06
- FRICKLAND, P. O.**
Freeze/Thaw Properties of Cellular Glass
NPO-15854 B83-10162 04
Pressure/Vacuum Bonding for Low-Curvature Mirrors
NPO-15613 B83-10718 08
Airlock Entry
NPO-15415 B83-10720 08
- FRISCH, H. P.**
Modern Numerical Methods for Classical Sampled System Analysis-SAMSAN
GSC-12827 B83-10742 09
- FRIZZELL, A. W.**
Hot-Melt Adhesive Attachment System
LAR-12894 B83-10109 08
- FU, T. S.**
Gas-Temperature Measurement With Minimal Perturbation
MSC-20338 B83-10061 06
- FUECHSEL, C. F.**
SPIRE Data-Base Management System
GSC-12684 B83-10737 09
- FURMAN, T. R.**
Modified Fabrication for InGaAsP Strip Laser
LAR-12986 B83-10705 08
- G**
- GALLOWAY, T.**
General Aviation Synthesis Program
ARC-11434 B83-10396 06
- GAMMELL, P. M.**
Dielectric Scanning Locates Voids in Glass Foam
NPO-15728 B83-10176 06
- GANTS, M.**
Pressure-Driven Waterflow Cleaning Device
MFS-19638 B83-10679 07
- GARBA, J. A.**
Methods for Estimating Payload/Vehicle Design Loads
NPO-15550 B83-10184 06
- GARCIA, J.**
Tube Alignment for Machining
MFS-19719 B83-10663 07
- GARRISON, J. B.**
Binary Correlator for Electromagnetic Signal Patterns
GSC-12714 B83-10275 02
- GARVIN, W.**
Bellows With Longitudinal Beams
MFS-19633 B83-10713 08
- GARY, B. L.**
Searching for Clear-Air Turbulence
NPO-15351 B83-10016 02
- GASNER, S. H.**
Developing Standards for Photovoltaic Devices
NPO-15734 B83-10130 01
- GASPAR, K.**
Self-Locking Connector
MFS-19716 B83-10095 07
- GATES, D.**
Measuring Coating Thickness
MFS-25633 B83-10398 06
- GATES, G.**
Electronic Force Gage for Welders
MFS-25798 B83-10172 06
- GAULDIN, R. E.**
Forming Mirrors on Composite Materials
NPO-15912 B83-10215 08
- GAUTHIER, M. K.**
Radiation-Hardness Data For Semiconductor Devices
NPO-15787 B83-10507 01
- GAVALAS, G. R.**
Removing Sulfur Dioxide From Flue Gases
NPO-15758 B83-10593 04
- GAYER, J. N.**
Low-Cost Alternatives in Hybrid Microcircuit Packaging
MFS-25809 B83-10236 08
- GEDDES, J. P.**
Tool Enlarges Hard-to-Reach Holes
MFS-19789 B83-10413 07
- GIANDOMENICO, A.**
Fluorine Mixer/Vaporizer for Chemical Lasers
NPO-15552 B83-10311 03
- GIBSON, J.**
Self-Locating Latch
MFS-25956 B83-10446 07
- GIEBLER, M. M.**
Adjusting the Contour of Reflector Panels
NPO-15319 B83-10721 08
- GLACCUM, R.**
Radar Cuts Subsoil Survey Costs
KSC-11227 B83-10276 02
- GLASS, A. B.**
Monte Carlo Investigation of Trajectories
GSC-12705 B83-10074 06
- GLAVICH, T. A.**
Monitoring Acoustically Levitated Samples
NPO-15193 B83-10727 08
- GLEASON, J. R.**
Hot-Melt Adhesive Attachment System
LAR-12894 B83-10109 08
- GOLDOWSKY, M. P.**
Reciprocating Linear Electric Motor
GSC-12773 B83-10421 07
- GOLDSTEIN, H. E.**
Two-Layer Glass Thermal-Control Coating
ARC-11164 B83-10573 04
- GOLLIHUGH, T.**
Wire Electrical-Discharge Machining Aid
MFS-19643 B83-10686 07

GONZALEZ, C. C.

- GONZALEZ, C. C.**
Predicting Solar Deficits
NPO-15667 B83-10561 03
- GONZALEZ, R.**
Digital-Image Enhancement
MFS-25679 B83-10530 02
- GORDON, G. H.**
Walnut Hulls Clean Aluminum
MFS-27012 B83-10344 04
- GORRELL, W. T.**
Design of Multistage Axial-Flow Compressors
LEW-13505 B83-10191 06
- GOSS, W.**
Polymer Bonding of Optical Fibers
NPO-15464 B83-10224 08
- GOSS, W. C.**
Collecting Light From Point Images
NPO-15887 B83-10542 03
- GOSSETT, E.**
Lightweight Metal Mirrors
GSC-12743 B83-10448 08
- GOSSLER, A.**
Solar Heating and Cooling Development Program
MFS-27015 B83-10304 03
- GRAHAM, W. G.**
Ball-and-Socket-Bearing Wear Test
MFS-19737 B83-10427 07
- GRANA, D. C.**
Flowthrough Bacteria-Detection System
LAR-12871 B83-10164 05
- GRANETT, D.**
Acoustic-Levitation Chamber
NPO-16142 B83-10726 08
- GRANT, P.**
X-Ray Detector for 1 to 30 keV
GSC-12682 B83-10008 01
- GRANT, W. B.**
Detecting Methane Leaks
NPO-15790 B83-10329 04
- GRASSO, A. P.**
Spool-Valve Pressure-Difference Regulator
MSC-20127 B83-10200 07
- GRAVES, J. R.**
Programmable Power Conditioner
MFS-25531 B83-10270 01
- GREEN, G.**
Electrolytic Sharpening of Diode-Contact Whiskers
NPO-15789 B83-10222 08
- GREENE, W. H.**
Panel Analysis and Sizing Code
LAR-13004 B83-10393 06
- GREGORY, D. A.**
Charged Particle Flux Sensor
MFS-25461 B83-10021 03
- GRIFFIN, J. DANIELC.**
Measuring Power Flow in Electric Vehicles
NPO-15514 B83-10138 02
- GRIFFITH, J. S.**
Determining Solar-Cell Operating Temperature
NPO-15449 B83-10010 01
- GRIFFITHS, W. R.**
Vertical-Control Subsystem for Automatic Coal Mining
MFS-25811 B83-10659 07
- GRISWOLD, T. W.**
Test Pattern for IC's
NPO-15648 B83-10232 08

- GROTBECK, G. H.**
Fabrication of Graphite/Epoxy Column Elements
LAR-12915 B83-10115 08
- GRUMM, R. L.**
Lightning-Transient Recorder
NPO-15895 B83-10272 02
- GRUNG, B.**
Electric-Power System Simulator
NPO-15515 B83-10288 02
- GRUNG, B.**
Studies of the Inverted Meniscus Deposition of Silicon on Ceramic
NPO-15602 B83-10234 08
- GUERTIN, L. J.**
Reducing the Resistance of Conductive-Adhesive Bonds
MSC-20427 B83-10219 08
- GULIZIA, R. W.**
Unmanned Instrument Platform for Undersea Exploration
NPO-15878 B83-10526 02
- GUM, J. S.**
Tool Releases Optical Elements From Spring Brackets
GSC-12794 B83-10380 06
- GUNDY, K. L.**
Transonic Airfoil Analysis
ARC-11436 B83-10395 06
- GUPTA, A.**
Accelerated Solar-UV Test Chamber
NPO-15063 B83-10323 03
- GUPTA, A.**
Estimating the Lifetimes of Nickel/Cadmium Cells
NPO-15145 B83-10576 04
- GUPTA, K. K.**
Free-Vibration Analysis of Structures
NPO-15797 B83-10625 06
- GZOWSKI, E.**
Additional Heat Treatment for Silica-Fiber Insulation
MSC-20600 B83-10588 04

H

- HAGAN, M.**
Containerless-Processing Module
NPO-14932 B83-10479 08
- HAGEN, G. R.**
Pull Test Verifies Gap Loading
MSC-20231 B83-10119 08
- HAGERTY, J. J.**
Preparing Solar Cells for Soldering
NPO-15626 B83-10218 08
- HAGERTY, J. J.**
Automated Assembly of Solar Panels
NPO-16206 B83-10729 08
- HAINES, J. R.**
Predicting Moisture Absorption in Composite Materials
MSC-20109 B83-10337 04
- HAJDIK, G.**
Control-Chain Safety Tray and Friction Pull
MSC-20401 B83-10416 07
- HALLBERG, F. C.**
Positioning Vise for Crystal Cleavage
GSC-12762 B83-10701 08
- HAMED, A.**
Calculating the Flow Field in a Radial Turbine Scroll
LEW-13437 B83-10104 07
- HAMILTON, A. B.**
Eddy-Current Damage Test for Carbon Composites
MSC-20358 B83-10177 06
- HANDLYKKEN, M. B.**
Brushless Low-Speed dc Tachometer
NPO-15706 B83-10650 06
- HANNA, M. F.**
Pyrheliometer With Improved Accuracy
NPO-15398 B83-10143 03
- HANSEN, G. R.**
Unmanned Instrument Platform for Undersea Exploration
NPO-15878 B83-10526 02
- HANSEN, K. C.**
Generating SiF₄ From H₂SiF₆
NPO-15721 B83-10155 04
- HAPPE, R.**
Containerless Processing of Advanced Glasses
MFS-27002 B83-10581 04
- HARPER, J.**
Binder for Carbon-Fiber Coating
NPO-14988 B83-10579 04
- HARRIS, J.**
Bidirectional Continuous Coal Miner
NPO-15166 B83-10432 07
- HARRIS, J. E.**
Boundary-Layer Equations for Two-Dimensional and Axisymmetric Flow
LAR-13015 B83-10080 06
- HARTOP, R. W.**
Cooling Waveguide Flanges in Microwave Transmitters
NPO-15401 B83-10264 01
- HARVEY, P.**
Solid-State dc Circuit Breaker
MFS-25172 B83-10005 01
- HASEGAWA, T.**
Freeze/Thaw Properties of Cellular Glass
NPO-15854 B83-10162 04
- HASLIM, L. A.**
Segmented Tubular Seat Springs
ARC-11349 B83-10422 07
- HASSE, K. R.**
Stress Corrosion Cracking of Certain Aluminum Alloys
MFS-25773 B83-10160 04
- HEAPS, J. D.**
Studies of the Inverted Meniscus Deposition of Silicon on Ceramic
NPO-15602 B83-10234 08
- HEAPS, J. D.**
Improved Silicon-Growth Chamber
NPO-15237 B83-10471 08
- HEARN, C. P.**
Demodulator for AM and SSB-SC Signals
LAR-12716 B83-10509 01
- HEARSAY, R. M.**
Axial Compressor Design and Analysis
LEW-13488 B83-10196 06
- HEDGLEY JR., D. R.**
Hidden-Line Computer Code
ARC-11446 B83-10491 09
- HEERMANN, T.**
Air Guide for Sheet-Metal Grinder
MFS-19788 B83-10423 07
- HEFLINGER, L. O.**
Improved Laser Velocimeter
MFS-25465 B83-10312 03

- HEIN, L. A.**
Lock for Tube Fittings
MFS-25964 B83-10440 07
- HELD, D. N.**
Detecting Deformations in
Phased-Array Antennas
NPO-15390 B83-10523 02
- HELIZON, R.**
Imaging Bubble Formation In a Drop
Tube
NPO-15114 B83-10324 03
- HELLAWELL, A.**
Directional Solidification of
Monotectic Alloys
MFS-25767 B83-10157 04
Directional Solidification of
Monotectic Alloys
MFS-25767 B83-10159 04
- HELMAN, D. D.**
Fitting Flexible Coverings to
Contoured Surfaces
MSC-20503 B83-10691 08
- HENDERSON, C.**
Sealant Applicator for Fastener
Heads
MFS-25922 B83-10487 08
- HENNESSEE, G. C.**
Improving A Guarded Hotplate
MSC-20447 B83-10069 06
- HENNESSY, K. W.**
Panel Analysis and Sizing Code
LAR-13004 B83-10393 06
- HEPNER, T. E.**
Autocovariance Computer
LAR-12968 B83-10615 06
- HEPPNER, D. B.**
Nitrogen Supply Uses Hydrazine
ARC-11464 B83-10343 04
- HERBERT, H. E.**
Extended Vortex Lattice Method
LAR-13039 B83-10192 06
- HERBISON, D. R.**
Status Panel For Video Cassette
Recorders
KSC-11254 B83-10532 02
Controlling TV-Camera f-Stop
Remotely
KSC-11269 B83-10550 03
- HERGENROTHER, P. M.**
Solvent-Resistant Polysulfones
LAR-12931 B83-10151 04
- HESS, L. M.**
Hardware Fault Simulator Generates
Test Vectors For Complex IC's
NPO-15362 B83-10538 02
- HEWITT, C.**
Machining Three Prongs on a Shaft
MFS-19729 B83-10099 07
- HEWITT, D. R.**
Variable-Conductance Heat-Transfer
Module
GSC-12771 B83-10408 07
- HEYMAN, J. S.**
Acoustic Tooth Cleaner
LAR-12471 B83-10367 05
Acoustic Design Improves Composite
Impact Resistance
LAR-12887 B83-10375 06
- HEYSER, R. C.**
Containerless-Processing Module
NPO-14932 B83-10479 08
- HIBDON, R. A.**
Drilling Holes on a Large Bolt Circle
KSC-11115 B83-10434 07
- HIGBEE, D. W.**
Handling Fixture for Solar-Cell
Arrays
NPO-15908 B83-10450 08
- HIGUCHI, H.**
Measuring Surface-Shear Stress in a
Wind Tunnel
ARC-11384 B83-10180 06
- HILL, D.**
Making SixNyCz Fibers by Pyrolysis
MFS-25621 B83-10585 04
- HILL, J. W.**
Task Board Tests Manipulator
Performance
NPO-15150 B83-10070 06
- HILL, W. E.**
Robotic Water Blast Cleaner
MFS-25519 B83-10092 07
- HINKLEY, E. D.**
Detecting Methane Leaks
NPO-15790 B83-10329 04
- HODGETTS, P. J.**
Determining the Orientation of
Anisotropic Materials
MSC-20229 B83-10054 06
Membrane Switches Check Seal
Pressure
MSC-20468 B83-10373 06
- HOFFMAN, A. R.**
Developing Standards for
Photovoltaic Devices
NPO-15734 B83-10130 01
Effects of Outdoor Soiling on
Photovoltaic Modules
NPO-15186 B83-10317 03
- HOLLAND, L. R.**
Holder for Fragile Parts
MFS-25772 B83-10212 07
- HOLLAND, R. L.**
Least-Squares Prediction of Solar
Activity
MFS-25870 B83-10303 03
- HOLLEY, L. D.**
Automatic Control of Multimedia
Shows
KSC-11080 B83-10286 02
- HOLMES, B. J.**
Identifying Boundary-Layer
Transitions on Aircraft Skin
LAR-13089 B83-10609 06
- HOLST, T. L.**
Transonic Airfoil Analysis
ARC-11436 B83-10395 06
- HONG, S. D.**
Estimating the Lifetimes of
Nickel/Cadmium Cells
NPO-15145 B83-10576 04
Automated Mercury Dilatometer
NPO-14884 B83-10604 06
- HOOVER, R. B.**
Preserving Color in Developed
Photographic Film
MFS-23250 B83-10037 04
- HORIUCHI, H. H.**
Containerless-Processing Module
NPO-14932 B83-10479 08
- HORN, M. K.**
Obtaining Runge-Kutta Solutions
Between Time Steps
MSC-20404 B83-10489 09
- HOUSE, K.**
X-Ray-Diffraction Analysis of Nb/Ge
Alloys
MFS-27038 B83-10594 04
- HOUSEMAN, J.**
Three-Zone Catalyst Resists Sulfur
Poisoning
NPO-14827 B83-10356 04
- HOWARD, R. T.**
Training Simulator for Fire
Management
MFS-25898 B83-10495 09
- HOWE, S. D.**
Torque Compensator for Mirror
Mountings
GSC-12742 B83-10169 06
- HOWELL, L. W.**
Pseudo-Random Number
Generators
MFS-27017 B83-10736 09
- HOWER, P. L.**
High Power Switching Transistor
LEW-13728 B83-10127 01
- HRIBAR, V. F.**
Conductive Plasma-Sprayed
Coatings
NPO-15927 B83-10595 04
- HU, T.**
Random Life Curves for Common
Engineering Materials
MSC-20433 B83-10163 04
- HUBBARD, W. P.**
Measuring Tension in Transistor
Suspensions
NPO-15677 B83-10128 01
X-Ray Inspection of Transistors
NPO-15675 B83-10225 08
- HUBER, W. C.**
Double-Poppet Valve
MSC-20627 B83-10669 07
Triple-Seal Valve
MSC-20628 B83-10670 07
- HUFFMAN, J. K.**
Vortex Lift Augmentation by Suction
LAR-12969 B83-10071 06
- HUFNAGEL, W. F.**
Hiding Solar-Array Bus Bars
NPO-15755 B83-10126 01
- HUMPHREY, M. F.**
Solvent Extraction of Furfural From
Biomass
NPO-15987 B83-10599 05
- HUMPHRIES, T.**
Stress-Corrosion Cracking in
Martensitic PH Stainless Steels
MFS-25400 B83-10342 04
- HUNEDI, F.**
Determining Frost Depth and
Density
MFS-25754 B83-10403 06
- HURICK, M. G.**
Solar-Pond Resources in the United
States
NPO-15681 B83-10150 03
- IBRAHIM, S. R.**
Time-Domain Modal Vibration
Identification
LAR-12924 B83-10072 06
- INGHAM, J. D.**
Making Thermoplastics
Flame-Resistant
NPO-14857 B83-10363 04

J

- JACKSON JR., J.**
X-Ray Detector for 1 to 30 keV
GSC-12682 B83-10008 01
- JACKSON, C. H.**
Robotic Water Blast Cleaner
MFS-25519 B83-10092 07
Walnut Hulls Clean Aluminum
MFS-27012 B83-10344 04
Sealant Applicator for Fastener
Heads
MFS-25922 B83-10487 08
- JACKSON, E.**
Theory for Eccentric and Misaligned
Annular Seals
MFS-19892 B83-10652 06
- JACKSON, E. D.**
Antivortex Inlet Ribs for Fluid-Seals
MFS-19793 B83-10426 07
- JACKSON, L. R.**
Vortex Lift Augmentation by Suction
LAR-12969 B83-10071 06
Curved Caps Raise Corrugation
Strength
LAR-12884 B83-10105 08
- JACOBI, N.**
Acoustical-Levitation Chamber for
Metallurgy
NPO-15453 B83-10117 08
Acoustic Levitation With Less
Equipment
NPO-15562 B83-10118 08
- JEFFERS, E.**
Automated Coliform Analysis
ARC-11322 B83-10368 05
- JENKINS, R. E.**
Binary Correlator for Electromagnetic
Signal Patterns
GSC-12714 B83-10275 02
- JENSEN, H. O. C.**
Reusable High-Pressure Connector
MSC-20339 B83-10097 07
- JETT JR., J. R.**
Internally Mounting Strain Gages
GSC-12824 B83-10618 06
- JOHNSON, C.**
Silicon Nitride Antireflection Coatings
for Photovoltaic Cells
ARC-11447 B83-10332 04
- JOHNSON, J. L.**
Interstitial Collimating Holes for
Gas-Levitation Microfurnace
MFS-25829 B83-10460 08
Sonic-Pump Levitator
MFS-25828 B83-10462 08
- JOHNSON, R.**
Radar Cuts Subsoil Survey Costs
KSC-11227 B83-10276 02
- JOHNSON, W.**
Algorithm for Constructing Contour
Plots
ARC-11441 B83-10490 09
- JOHNSON, W. L.**
Containerless Solidification of
Amorphous Metals
NPO-15776 B83-10570 04
- JOHNSTON, A. R.**
Focal-Plane-Array Optical Proximity
Sensors
NPO-15155 B83-10017 01
Effect of Temperature on Fiber-Optic
Delay
NPO-15148 B83-10318 03

- JOHNSTON, E. J.**
Transmitting Electromagnetic Energy
into Liquids
NPO-15868 B83-10266 01
- JOHNSTON, M. H.**
High-Temperature, Low-Gravity
Casting Furnace
MFS-25605 B83-10596 04
- JONES III, S.**
Automated Variable-Polarity
Plasma-Arc Welding
MFS-27042 B83-10722 08
- JONES, W. S.**
In Situ Composite Fastener
LAR-12939 B83-10463 08
- JORDAN, R. L.**
Radar for Mapping Sea Ice
NPO-15350 B83-10135 02
Antenna for Imaging Sea Ice
NPO-15352 B83-10271 01

K

- KAHN, M. A.**
Depth Gage for Threaded Holes
MFS-19884 B83-10672 07
- KALIL, L. F.**
Temperature-Averaging Thermal
Probe
GSC-12795 B83-10614 06
- KALVINSKAS, J. J.**
Desulfurizing Coal By Chlorinolysis
and Hydrogenation
NPO-15304 B83-10034 04
- KAMAT, M. P.**
Crash Simulation and Nonlinear
Structural Analysis
LAR-12926 B83-10392 06
- KAMIOKA, Y.**
Fluid/Vapor Separator for Variable
Flow Rates
ARC-11401 B83-10299 03
- KANNEL, J. W.**
Bearing Wear in Large Thermal
Gradients
MFS-25879 B83-10428 07
- KAO, Y. C.**
High Power Switching Transistor
LEW-13728 B83-10127 01
- KAPUSTKA, R. E.**
Programmable Power Conditioner
MFS-25531 B83-10270 01
- KASSNER, R. R.**
Nonseparating High-Area-Ratio
Supersonic Nozzles
MFS-19758 B83-10657 06
- KATZ, M. C.**
High-Flow Asymmetric
Reverse-Osmosis Membranes
ARC-11359 B83-10598 05
- KATZBERG, S. J.**
Measuring Excess Noise in SDL's
LAR-12938 B83-10004 01
- KATZOFF, J. S.**
Annealing Solar Cells With Lasers
NPO-15694 B83-10120 08
- KAUFFMAN, R. C.**
Electronically-Scanned Pressure
Sensors
ARC-11361 B83-10387 06
- KAUFMAN, M.**
Electrodeposition Repair of Damaged
Metal Parts
MFS-19783 B83-10221 08
- KELLIHER, W. C.**
Identifying Boundary-Layer
Transitions on Aircraft Skin
LAR-13089 B83-10609 06
- KELLY, F. G.**
Solar-Cell-Manufacturing System
MFS-25483 B83-10728 08
- KELLY, H. N.**
Shell-Tile Thermal-Protection
System
LAR-12862 B83-10051 06
- KENAN, R. P.**
Pairwise Comparison of Voltage
Sets
LAR-12929 B83-10256 01
- KENDALL JR., J. M.**
Fabrication of Hollow Spheres
NPO-15798 B83-10467 08
Low-Density High-Strength Foamed
Materials
NPO-15411 B83-10575 04
- KENDALL SR., J. M.**
Solar-Collector Radiometer
NPO-14986 B83-10313 03
- KENDALL, S., JAMESM.**
Pressure Reducer for Coal Gasifiers
NPO-15100 B83-10084 07
- KERRISK, D. J.**
Monitoring Acoustically Levitated
Samples
NPO-15193 B83-10727 08
- KERSHNER, D. D.**
Miniature Airflow Sensor
LAR-13065 B83-10603 06
- KIM, K.**
Containerless Processing of
Advanced Glasses
MFS-27002 B83-10581 04
- KIM, K. M.**
Oscillating-Crucible Technique for
Silicon Growth
NPO-15938 B83-10455 08
- KING JR., W.**
Deallocation Defective Space on
Winchester Disks
KSC-11287 B83-10534 02
- KING, H. M.**
High-Temperature, Low-Gravity
Casting Furnace
MFS-25605 B83-10596 04
- KIRKHAM, K. E.**
Eddy-Current Inspection of Narrow
Metal Tubes
MFS-19742 B83-10374 06
- KIRKLAND, G. L.**
Large-Scale Software Management
System
KSC-11230 B83-10122 09
- KISKIS, J.**
Continuous Mining Machine
NPO-15164 B83-10430 07
Miner for Cutting Entry Passages in
Coal Seams
NPO-15167 B83-10433 07
- KISKIS, J. P.**
Roof Support Near Coal-Mining
Face
NPO-15165 B83-10431 07
- KISS, J. J.**
Shear-Panel Test Fixture Eliminates
Corner Stresses
LAR-12930 B83-10383 06
- KISSEL, R. R.**
Circuitry for Angle Measurements
MFS-25825 B83-10137 02

- KITTEL, P.**
Passive Module for Cryogenic Refrigeration
ARC-11263 B83-10401 06
- KITTS, R. G.**
Adjustable Walker for the Handicapped
LAR-12990 B83-10369 05
- KKISKIS, J. P.**
Bidirectional Continuous Coal Miner
NPO-15166 B83-10432 07
- KLECKNER, R. J.**
Spherical-Bearing Analysis Program
LEW-13626 B83-10671 07
- KLEINBERG, L.**
Band-Pass Amplifier Without Discrete Reactance Elements
GSC-12788 B83-10247 01
- KLEINT, R. E.**
Eddy-Current Inspection of Narrow Metal Tubes
MFS-19742 B83-10374 06
- KNAPP, K. K.**
Liquid-Droplet Radiative Cooler
MFS-25890 B83-10602 06
- KNOX, J. F.**
Better Thermal Insulation in Solar-Array Laminators
NPO-15925 B83-10451 08
- KNUROVSKY, T.**
Continuous Mining Machine
NPO-15164 B83-10430 07
Roof Support Near Coal-Mining Face
NPO-15165 B83-10431 07
Bidirectional Continuous Coal Miner
NPO-15166 B83-10432 07
Miner for Cutting Entry Passages in Coal Seams
NPO-15167 B83-10433 07
- KOCH, D. E.**
Measuring Small Leak Holes
MSC-20113 B83-10063 06
- KOENIG, J. C.**
Add-On Shielding for Unshielded Wire
NPO-15107 B83-10007 01
- KOHL, W. H.**
Linking 'Smart' Modules by a Single Channel
NPO-15342 B83-10134 02
- KOJIMA, G. K.**
Microprocessor-Based Wave Analyzer
ARC-11388 B83-10046 05
- KOJIRO, D. R.**
Measuring Diffusion and Recombination Polycrystalline Silicon
ARC-11431 B83-10040 04
- KORNFELD, D. M.**
Speculation on Ultrasonic Disintegration of Arterial Deposits
MFS-25161 B83-10600 05
- KOSTAS, C.**
Measuring Recessed Pins
MFS-19673 B83-10439 07
- KOURTIDES, D. A.**
Fire-Resistant Composites
ARC-11331 B83-10041 04
- KOWITZ, H. R.**
Measuring Excess Noise in SDL's
LAR-12938 B83-10004 01
- KU, T. J.**
Minimum Induced Drag of Nonplanar Wings
LAR-12925 B83-10078 06
- KUDIRKA, A. A.**
Ceramics for Solar Receivers
NPO-15763 B83-10351 04
- KUHLMAN, J. M.**
Minimum Induced Drag of Nonplanar Wings
LAR-12925 B83-10078 06
Subcritical Wing Design Code
LAR-12959 B83-10193 06
- KURASHITA, J. H.**
Containerless-Processing Module
NPO-14932 B83-10479 08
- KURTZ, G. W.**
Portable X-Y Scanner
MFS-25687 B83-10411 07
- KUYPER, D. J.**
Foil Panel Mirrors for Nonimaging Applications
GSC-12751 B83-10449 08
- L**
- LADANY, I.**
Modified Fabrication for InGaAsP Strip Laser
LAR-12986 B83-10705 08
- LAGADINOS, J. C.**
Electronic-Power-Transformer Design Guide
LEW-13208 B83-10131 01
- LAKIN, A.**
Dye Indicators for Acidic or Basic Surface Contamination
MFS-19387 B83-10580 04
- LAMAR, J. E.**
Extended Vortex Lattice Method
LAR-13039 B83-10192 06
- LAMBERT, J. D.**
Sealant Applicator for Fastener Heads
MFS-25922 B83-10487 08
- LANGMAIER, J. K.**
Containerless-Processing Module
NPO-14932 B83-10479 08
- LAN, C. E.**
Calculating the Vortex Lift Effect of Cambered Wings
LAR-12985 B83-10082 06
- LANE, R. L.**
Cold-Crucible Premelter for Silicon
NPO-16050 B83-10457 08
Shield Boosts Silicon-Growth Rate
NPO-16049 B83-10475 08
- LANGE, R.**
Solidifying Bi/MnBi at Low Gravity
MFS-25736 B83-10044 04
- LANGMAIER, J. K.**
Monitoring Acoustically Levitated Samples
NPO-15193 B83-10727 08
- LANIER, J. R.**
Programmable Power Conditioner
MFS-25531 B83-10270 01
- LANSING, F. L.**
Two-Fluid Solar Pond
NPO-15419 B83-10316 03
- LARSON, G.**
Dispensing Small Measured Volumes of Liquid
MFS-25690 B83-10056 06
- LATHROP, J. W.**
Fast Electronic Solar Cell Tester
NPO-15676 B83-10011 02
- LAU, K. Y.**
Stabilizing Fiber-Optic Transmission Lines
NPO-15036 B83-10319 03
- LAUDENSLAGER, J. B.**
Scanning XeCl Laser
NPO-15692 B83-10307 03
Torque-Wrench Extension Arm
NPO-15495 B83-10447 07
- LAUE, E. G.**
Accelerated Solar-UV Test Chamber
NPO-15063 B83-10323 03
Rain and Dew Detector
NPO-15370 B83-10405 06
Preventing Moisture Damage To Solar Panels
NPO-15481 B83-10477 08
Trace-Level Solid-Polymer Electrolyte Hygrometer
NPO-15722 B83-10645 06
- LAUMANN, E. A.**
Airflow Assists Solar Receiver
NPO-15784 B83-10545 03
- LAWSON, D.**
Supercritical-Multiple-Solvent on From Coal
NPO-15767 B83-10153 04
- LAWSON, D. D.**
Estimating the Solubility of Gases in Battery Electrolytes
NPO-15610 B83-10321 03
- LAYLAND, J. W.**
Virtual-Center Antenna-Arraying System
NPO-15874 B83-10273 02
- LAZZERY, A. G.**
Aligning Solder Pads on a Solar Cell
NPO-15298 B83-10732 08
- LEA, J. B.**
Reinforcement for Stretch Formed Sheet Metal
MSC-20228 B83-10108 08
- LEDBETTER III, E.**
Polycarbosilazane-Resin on Process
MFS-25758 B83-10330 04
- LEDBETTER III, F.**
SixNyCz Fibers for Safer Composites
MFS-25721 B83-10331 04
Attaching Strain Gages to Composite Materials
MFS-25867 B83-10378 06
Predicting Thermal Conductivity
MFS-25732 B83-10400 06
Modified Oscillograph for Impacting Composite Materials
MFS-25901 B83-10406 06
Frame Allines Fibers in Multilayer Composites
MFS-25959 B83-10706 08
- LEDBETTER, F. E.**
Sample Holder for Cryogenic Adhesive Shear Test
MFS-25729 B83-10060 06
- LEE, F.**
SCM Handbooks for dc-to-dc Converters
LEW-13886 B83-10258 01
- LEE, J. M.**
Fluid/Vapor Separator for Variable Flow Rates
ARC-11401 B83-10299 03
- LEE, M. C.**
Hollow-Sphere Production Line
NPO-15592 B83-10230 08

LEE, S. W.

Producing Metallic Glasses With
Acoustic Levitation
NPO-15658 B83-10231 08
Imaging Bubble Formation In a Drop
Tube
NPO-15114 B83-10324 03
Containerless Solidification of
Amorphous Metals
NPO-15776 B83-10570 04
Hollow Spheres of Metallic Glass
NPO-15991 B83-10583 04
Acoustic-Levitation Chamber
NPO-16142 B83-10726 08

LEE, S. W.
Estimating Waveguide Feed
Directivity and Spacing
NPO-15603 B83-10144 03

LEHOCZKY, S. L.
Growing Crystals for Infrared
Detectors
MFS-25786 B83-10465 08

LEINKRAM, C. Z.
Schottky-Barrier Photocell With
Intermediate Metal Layer
GSC-12816 B83-10501 01

LEISER, D. B.
Two-Layer Glass Thermal-Control
Coating
ARC-11164 B83-10573 04

LELAND, R. S.
Testing Large Solar Mirrors
NPO-15404 B83-10294 03

LEMONS, F.
Measuring Surface-Shear Stress in a
Wind Tunnel
ARC-11384 B83-10180 06

LEONARD, A.
Simulating a Three-Dimensional Flow
in Pipes
ARC-11466 B83-10638 06

LEONARD, P. A.
Quality-Planning-Requirements
ments
MSC-20280 B83-10233 08

LEONDIS, A.
Simplified Modeling of Tetrahedral
Trusses
LAR-12815 B83-10068 06

LERNER, N. R.
Stronger Carbon Fibers for
Reinforced Plastics
ARC-11261 B83-10035 04

LESH, J. R.
Phased-Antenna-Array Conical
Scanning
NPO-15899 B83-10274 02
Microwave Radiation Detector
NPO-15932 B83-10325 03

LESSER, L. A.
Measuring Trace Hydrocarbons in
Silanes
NPO-15273 B83-10359 04

LEVIN, H.
Combined Silane Pyrolysis and
Silicon-Particle Melt
NPO-15510 B83-10357 04

LEWIS, B. F.
Improved Electrostatic Optical
System
NPO-15774 B83-10302 03

LEWIS, J.
Portable Fatigue-Testing Machine
MFS-19459 B83-10649 06

LI, F. K.
Detecting Deformations in
Phased-Array Antennas
NPO-15390 B83-10523 02

LICARI, J.
Standards for Epoxies Used in
Microelectronics
MFS-25810 B83-10042 04

LIN, E. I.
Saltless Solar Ponds
NPO-15808 B83-10563 03

LIN, F.
Thermal and Flow Data From
Liquid-Oxygen System
KSC-11265 B83-10635 06

LINDBERG, D.
Test Frame Simulates Zero Gravity
MFS-25518 B83-10637 06

LIPIES, R. G.
Virtual-Center Antenna-Arraying
System
NPO-15874 B83-10273 02

LITTLE, B. D.
Hot-Melt Adhesive Attachment
System
LAR-12894 B83-10109 08

LITTLE, J.
Temporary Sealing of Cavities for
Leak Testing
MFS-19646 B83-10680 07

LIU, J. K.
Silicon-Film Growth by Continuous
Edge-Supported Melt Skimming
NPO-15532 B83-10731 08

LIU, K. Y.
VLSI Unit for Two-Dimensional
Convolutions
NPO-15224 B83-10136 02
Digital SAR Processor
NPO-15519 B83-10287 02

LLEGER, L. J.
Rewaterproofing Silica Tiles
MSC-20340 B83-10111 08

LOEWENTHAL, S. H.
Designing More-Efficient Spur Gears
LEW-13921 B83-10662 07

LOMBARD, J. W.
Plasma-Sprayed Copper Tie-In for
Nickel Plating
MFS-19481 B83-10584 04

LONBORG, J. O.
Stripper for Cables of Any Cross
Section
NPO-15631 B83-10443 07
Continuity/Isolation Checker
NPO-15632 B83-10518 01

LONG JR., E. R.
Electrical Dissipation Measurement of
Polymer Phase Transitions
LAR-12861 B83-10053 06

LOPEZ, M.
Annealing Solar Cells With Lasers
NPO-15694 B83-10120 08

LORRE, J. J.
Determining Aircraft Altitude
NPO-15386 B83-10402 06

LOTTS, C. G.
Panel Analysis and Sizing Code
LAR-13004 B83-10393 06

LOWSON, A. G.
Shell-Tile Thermal-Protection
System
LAR-12862 B83-10051 06

LUCE, R. S.
Discharge Extracts Oxygen From
CO₂
ARC-11305 B83-10334 04

LUCY, M. H.
Self-Alining Quick-Connect Joint
LAR-12711 B83-10094 07

PERSONAL AUTHOR INDEX

Low-Shock Pyrotechnic Actuator
LAR-13198 B83-10636 06

LUKENS, F. E.
High-Common-Mode-Rejection
ential Amplifier
MFS-25868 B83-10519 01

LUTES, G. F.
Effect of Temperature on Fiber-Optic
Delay
NPO-15148 B83-10318 03
Stabilizing Fiber-Optic Transmission
Lines
NPO-15036 B83-10319 03

LYNN, R. O.
Modified Antifreeze Liquids for Use
on Surfaces
MFS-25741 B83-10043 04

M

MAAG JR., C. R.
Effects of Outdoor Soiling on
Photovoltaic Modules
NPO-15186 B83-10317 03

MACCONNELL, J. W.
Efficient Distribution of
Frequency-Standard Signals
NPO-15392 B83-10012 02

MACCONOCHIE, I. O.
Shell-Tile Thermal-Protection
System
LAR-12862 B83-10051 06

MACFARLANE, D. I.
Controlling the Focus in
Electron-Beam Welders
MFS-19814 B83-10664 07

MACKINTOSH, B. H.
Low-Contamination Vibrating Feeder
for Silicon Chips
NPO-15128 B83-10445 07

MACUMBER, S.
Continuous-Reading Cryogen Level
Sensor
MFS-25873 B83-10611 06

MADISON, L. G.
Coding for Single-Line Transmission
KSC-11220 B83-10013 02

MADUK, E.
Additional Heat Treatment for
Silica-Fiber Insulation
MSC-20600 B83-10588 04

MALIK, M. R.
Compressible Stability Analysis Code
For Transition Prediction in Three
Dimensional Boundary Layers.
LAR-13042 B83-10188 06

MALONEY, T. J.
Detecting Solar-Cell Failures
NPO-15741 B83-10129 01
Edge Supports for Photovoltaic
Modules
NPO-15740 B83-10452 08

Terminal System for Photovoltaic
Arrays
NPO-15739 B83-10733 08

MALTBY, H. M.
Reusable High-Pressure Connector
MSC-20339 B83-10097 07

MARDESIC, J. M.
Leak Tester for Cryogenic Flowlines
MSC-20233 B83-10174 06

MARGOLIS, J. S.
Obtaining Pulses From a CW Laser
NPO-15111 B83-10309 03

- MARK JR., A.**
Instrumentation and Control for
Fossil-Energy Processes
NPO-15581 B83-10531 02
- MARKLE, R.**
Making SixNyCz Fibers by Pyrolysis
MFS-25621 B83-10585 04
- MARKLES, O. F.**
Gelled Anti-icing Agents
MSC-20088 B83-10036 04
- MARKS, V. J.**
Security Package for the VAX
MSC-20423 B83-10246 09
- MAROM, E.**
Grating Demultiplexers for Optical
Signals
LAR-12748 AND LAR-12749
B83-10147 03
- MARSHALL, F.**
X-Ray Detector for 1 to 30 keV
GSC-12682 B83-10008 01
- MARTIN, K. E.**
Radiation-Hardness Data For
Semiconductor Devices
NPO-15787 B83-10507 01
- MARTSOLF, J. D.**
Frost Forecasting for Fruitgrowers
KSC-11241 B83-10243 09
- MASON, W. D.**
Bearing Measuring Fixture
MFS-19315 B83-10442 07
- MATLIN, M.**
Error-Compensated Integrate and
Hold
ARC-11303 B83-10255 01
- MATSUMOTO, Y.**
Motorized Cryogenic Valve
ARC-11452 B83-10687 07
- MATTAUCH, R. J.**
Electrolytic Sharpening of
Diode-Contact Whiskers
NPO-15789 B83-10222 08
- Low-Noise Submillimeter-Wave
Diode
NPO-15935 B83-10498 01
- MATTHEWS, L. F.**
Measuring Excess Noise in SDL's
LAR-12938 B83-10004 01
- MAURO, D. M.**
Packed Alumina Absorbs Hypergolic
Vapors
KSC-11278 B83-10569 04
- MAXWELL, D. J.**
Fabrication of Structural Cellular
Glass
NPO-15731 B83-10223 08
- MAY, C. E.**
In Situ Cross-Linking of Polyvinyl
Alcohol Films
LEW-13135 B83-10578 04
- MAYNE, R. C.**
Repairable Encapsulated Electronic
Modules
NPO-15079 B83-10703 08
- MAYO, R. A.**
Flexible Coupling for Angle
Transducer
NPO-15412 B83-10064 06
- MCBRYAR, H.**
Fuel-Cell Reactant-Gas Purifier
MSC-20103 B83-10032 04
- MCCAIN JR., C. R.**
Repairing Thermal Tiles
MSC-20336 B83-10712 08
- MCCLUNG, C. E.**
Epoxy Grout With Silica Thickener
NPO-15202 B83-10358 04
- MCCREIGHT, L.**
High-Temperature Helical-Tube Solar
Receiver
NPO-15768 B83-10565 03
- MCCULLOUGH, O. R.**
Sampling of Silicon Powder for
Impurity Analysis
NPO-15840 B83-10590 04
- MCDERMID, I. S.**
Scanning XeCl Laser
NPO-15692 B83-10307 03
- Simplified Laser Tuning
NPO-15690 B83-10308 03
- Laser-Beam Separator
NPO-15723 B83-10557 03
- MCELIECE, R. J.**
Efficient Coding for Optical
Communication
NPO-15856 B83-10734 09
- MCFARLAND, E. R.**
PANEL Code for Planar Cascades
LEW-13862 B83-10190 06
- MCHUGH, J. P.**
Improved Radiative Control of Ribbon
Growth
NPO-15916 B83-10456 08
- Starting Silicon-Ribbon Growth
Automatically
NPO-15919 B83-10458 08
- MCLAUCHIAN, J. M.**
Monitoring Acoustically Levitated
Samples
NPO-15193 B83-10727 08
- MCMAHAN, L.**
Microyield Stress in Composite
Materials
MFS-25709 B83-10639 06
- MENG, C. Y.**
Estimating Pump Blockage
MFS-19763 B83-10414 07
- MENG, S. Y.**
Radial-Cascade Analysis
MFS-19752 B83-10391 06
- Estimating Pump Blockage
MFS-19763 B83-10414 07
- Stalled-Flow and Head-Loss Model
for Diffuser Pumps
MFS-19748 B83-10673 07
- MENZIES, R. T.**
Visual Alinement Technique for
Infrared LIDAR
NPO-15826 B83-10544 03
- MEREDITH, R.**
Welding Tubes In Place
MFS-25714 B83-10723 08
- MERWARTH, P.**
FORTRAN Static Source Code
Analyzer
GSC-12724 B83-10738 09
- MERWARTH, P. D.**
Software Document Inventory
Program
GSC-12803 B83-10739 09
- NAMELIST Preprocessor Program
GSC-12711 B83-10740 09
- METKA JR., W. H.**
Digital Soldering-Iron Tester
MFS-25863 B83-10254 01
- MEYER, R. F.**
Efficient Distribution of
Frequency-Standard Signals
NPO-15392 B83-10012 02
- MEYERS, J. F.**
Autocovariance Computer
LAR-12968 B83-10615 06
- MEZZACAPPA, M. A.**
Determining Normal-Distribution
Tolerance Bounds Graphically
MSC-20115 B83-10238 09
- MILLER, B. A.**
Dissociated Airflow Effects During
Plasma-Arc Testing
MSC-20522 B83-10185 06
- MILLER, C. G.**
Gas-Bearing Crucible for Shot
Tower
NPO-15070 B83-10229 08
- Stabilizing Crystal Oscillators With
Melting Metals
NPO-15641 B83-10257 01
- MILLER, D. C.**
Improved Heat-Engine Solar-Energy
System
NPO-15762 B83-10560 03
- MILLER, F.**
Barrier Self for Hydraulic Actuators
MSC-20390 B83-10655 06
- MILLER, M.**
IC Fabrication Methods Improve
Laser Diodes
LAR-13059 B83-10692 08
- MILLER, R. L.**
Virtual-Center Antenna-Arraying
System
NPO-15874 B83-10273 02
- MILLS SR., R.**
Repairing Hidden Cracks in Coolant
Tubes
MFS-19796 B83-10689 08
- MINNICH, W. K.**
Wicking Coating for Heat Pipes
NPO-15212 B83-10485 08
- MINOTT, P. O.**
Multispectral Dual-Aperture Schmidt
Objective
GSC-12756 B83-10146 03
- MITCHELL, J. R.**
Harmonic-Balance Algorithm for
Nonlinear Systems
MFS-25821 B83-10239 09
- MITCHELL, R.**
Partial-Payload Support Structure
MFS-25485 B83-10647 06
- MITCHELL, W. D.**
Fabrication of Structural Cellular
Glass
NPO-15731 B83-10223 08
- MOHMOUD, M.**
SCM Handbooks for dc-to-dc
Converters
LEW-13886 B83-10258 01
- MONSON, D. J.**
Instrument Measures Airflow Friction
Without Contact
ARC-11354 B83-10047 06
- MOORE, R.**
Metering Baffle for Turbine-Blade
Cooling
MFS-25849 B83-10424 07
- MOORE, W.**
Thermal and Flow Data From
Liquid-Oxygen System
KSC-11265 B83-10635 06
- MORANT, C. A.**
Bonded Lockstitch for Insulating
Blankets
MSC-20283 B83-10688 08
- MORGAN, C. J.**
Positioning Vise for Crystal
Cleavage
GSC-12762 B83-10701 08

MORRIS, T. F.

- MORRIS, T. F.**
High-Temperature, Low-Gravity
Casting Furnace
MFS-25605 B83-10596 04
- MORRISETTE, E.**
Submicron-Particle Generator
LAR-12785 B83-10646 06
- MORRISON, A. D.**
Ultrasonics and Optics Would Control
Shot Size
NPO-15608 B83-10107 08
- Growing Single-Crystal Sheets by
Controlled Cooling
NPO-15800 B83-10459 08
- MORRISSEY, E. T.**
Membrane Switches Check Seal
Pressure
MSC-20468 B83-10373 06
- MORROW, R. B.**
Remotely-Adjustable
of Valve
NPO-15693 B83-10404 06
- MORSE, B. J.**
Concentrator-Enhanced Solar Array
NPO-15628 B83-10566 03
- MORTENSEN, G. D.**
Leak Tester for Cryogenic Flowlines
MSC-20233 B83-10174 06
- MOULTHROP, L. C.**
Improved O₂/H₂ Gas Mixture
Sensor
MSC-20408 B83-10156 04
- MROCNYSKI, R. P.**
Forest Resource Information System
MSC-20270 B83-10245 09
- MUELLER, W. A.**
Making Thermoplastics
Flame-Resistant
NPO-14857 B83-10363 04
- Binder for Carbon-Fiber Coating
NPO-14988 B83-10579 04
- MUHONEN, A. J.**
Wind Turbine With Concentric Ducts
KSC-11191 B83-10086 07
- MULLEN, P. G.**
Connecting Separate Computers to
a Common Bus
NPO-15433 B83-10289 02
- MULLINS, O.**
Feedthrough Seal For High-Pressure
Vessel
MSC-20625 B83-10502 01
- MUNAFO, A.**
Automated Variable-Polarity
Plasma-Arc Welding
MFS-27042 B83-10722 08
- MUNAFO, P.**
Automated Variable-Polarity
Plasma-Arc Welding
MFS-27042 B83-10722 08
- MYERS, W. N.**
Lock for Tube Fittings
MFS-25964 B83-10440 07
- MYLER, T.**
Elliptical Orbit Performance Computer
Program
LAR-13026 B83-10632 06

N

- NAST, T.**
Cooling by Para-to-Ortho-Hydrogen
Conversion
GSC-12770 B83-10024 03

- NEALE, B. C.**
Liquid-Oxygen-Compatible Cement
for Gaskets
MFS-19797 B83-10466 08
- NEIL, C. C.**
Miniature Rotator
LAR-12765 B83-10675 07
- NELSON, C.**
Paint-Thickness Checker
KSC-11270 B83-10520 01
- NELSON, E.**
Stress-Corrosion Cracking in
Martensitic PH Stainless Steels
MFS-25400 B83-10342 04
- NELSON, M. D.**
Polymer Bonding of Optical Fibers
NPO-15464 B83-10224 08
- NERHEIM, N. M.**
Multiple-Wavelength Metal/Halide
Laser
NPO-15256 B83-10306 03
- NIBLEY, D.**
Automated Coliform Analysis
ARC-11322 B83-10368 05
- NICHOLS, D. K.**
The Effect of Cosmic Rays on MSI
Devices
NPO-15779 B83-10263 01
- Radiation-Hardness Data For
Semiconductor Devices
NPO-15787 B83-10507 01
- NIRO, T.**
Fabrication of Multi-Ply Birefringent
Fibrous Composite Laminates
LAR-12960 B83-10704 08
- NISHIOKA, K.**
Automated Coliform Analysis
ARC-11322 B83-10368 05
- NITZ, F. P.**
Radially-Graduated
ture Profile
MFS-19831 B83-10607 06
- NOLA, F. J.**
Phase Detector for Power-Factor
Controller
MFS-25854 B83-10248 01
- Power-Factor Controller With Fast
Load Response
MFS-25852 B83-10249 01
- NORTON, W. E.**
Sealant Applicator for Fastener
Heads
MFS-25922 B83-10487 08
- NUMES JR., A.**
Automated Variable-Polarity
Plasma-Arc Welding
MFS-27042 B83-10722 08
- NUMMELIN, J.**
Measuring Ultrasonic Shear-Wave
Velocity
MFS-19680 B83-10058 06
- NUNES, A.**
Hot Microfissuring in Nickel Alloy
MFS-25763 B83-10587 04
- NUSSBERGER, A. A.**
Multiple-Band-Gap
Concept
MFS-25724 B83-10517 01

O

- OBARA, C. J.**
Identifying Boundary-Layer
Transitions on Aircraft Skin
LAR-13089 B83-10609 06

PERSONAL AUTHOR INDEX

- OCALLAGHAN, F. G.**
Electronically-Scanned
form Spectrometer
NPO-15844 B83-10292 02
- OGALLAGHER, J. J.**
Two-Stage Off-Axis Cylindrical Solar
Concentrator
NPO-15484 B83-10295 03
- OHLSON, J. E.**
Determining the Nonlinearity of
Microwave Receivers
NPO-15355 B83-10536 02
- OKUNOLA, O.**
Schottky-Barrier Photocell With
Intermediate Metal Layer
GSC-12816 B83-10501 01
- OLAH, S.**
Locking Corners Speed Solar-Array
Frame Assembly
NPO-15750 B83-10697 08
- OLLENDORF, S.**
Heat-Pipe Thermal Switch
GSC-12644 B83-10384 06
- OLLILA, T.**
Fuel-Cell Reactant-Gas Purifier
MSC-20103 B83-10032 04
- OLNEY, J. N.**
Leak Tester for Cryogenic Flowlines
MSC-20233 B83-10174 06
- OLSON, R. E.**
Ribbon Reduces Spiking in
Electron-Beam Welding
MFS-19701 B83-10698 08
- OPPENHEIM, U. P.**
Visual Alignment Technique for
Infrared LIDAR
NPO-15826 B83-10544 03
- ORAN, W. A.**
Quenching Alloys in Containerless
Processing
MFS-25305 B83-10478 08
- ORMES, J. F.**
Silicone Cerenkov-Radiator Material
GSC-12805 B83-10328 04
- ORONATO, P. I.**
Dissolving Bubbles in Glass
NPO-15105 B83-10347 04
- OSTERWISCH, F. G.**
Improved Infrared Multispectral
Scanner
NPO-16143 B83-10552 03
- OTOUSA, J. E.**
Plasma-Sprayed Copper Tie-In for
Nickel Plating
MFS-19481 B83-10584 04

P

- PACALA, T. J.**
Scanning XeCl Laser
NPO-15692 B83-10307 03
- Simplified Laser Tuning
NPO-15690 B83-10308 03
- Torque-Wrench Extension Arm
NPO-15495 B83-10447 07
- PAINE, G.**
Unmanned Instrument Platform for
Undersea Exploration
NPO-15878 B83-10526 02
- PALMER, W. B.**
Adjusting the Contour of Reflector
Panels
NPO-15319 B83-10721 08

- PALUZZI, P.**
Unmanned Instrument Platform for Undersea Exploration
NPO-15878 B83-10526 02
- PAQUETTE, E. G.**
Interstitial Collimating Holes for Gas-Levitation Microfurnace
MFS-25829 B83-10460 08
- PARKER, J.**
Elastomer-Modified Polyimides
ARC-11400 B83-10336 04
- PARKER, J. A.**
Fire-Resistant Composites
ARC-11331 B83-10041 04
Improved Thermosetting Imide Resins
ARC-11368 B83-10341 04
- PARKER, W.**
Measuring Recessed Pins
MFS-19673 B83-10439 07
- PARR, R. A.**
High-Temperature, Low-Gravity Casting Furnace
MFS-25605 B83-10596 04
- PARRA, G. T.**
Electronically-Scanned Pressure Sensors
ARC-11361 B83-10387 06
- PASLASKI, J. S.**
Determining Solar-Cell Operating Temperature
NPO-15449 B83-10010 01
- PAULSON, P.**
Display for Mining-Machine Operators
MFS-25955 B83-10535 02
- PAULSON, R.**
Detecting Defective Solder Bonds
MFS-25507 B83-10260 01
- PAULUS, D. E.**
Metering Baffle for Turbine-Blade Cooling
MFS-25849 B83-10424 07
Convection-Cooled Turbine Airfoils
MFS-25848 B83-10425 07
- PEEK, C. R.**
Control-Chain Safety Tray and Friction Pull
MSC-20401 B83-10416 07
- PENN, B.**
Sample Holder for Cryogenic Adhesive Shear Test
MFS-25729 B83-10060 06
Better Seals for Vacuum Bags
MFS-25875 B83-10216 08
Polycarbosilazane-Resin on Process
MFS-25758 B83-10330 04
SixNyCz Fibers for Safer Composites
MFS-25721 B83-10331 04
Attaching Strain Gages to Composite Materials
MFS-25867 B83-10378 06
Predicting Thermal Conductivity
MFS-25732 B83-10400 06
Modified Oscillograph for Impacting Composite Materials
MFS-25901 B83-10406 06
Frame Allines Fibers in Multilayer Composites
MFS-25959 B83-10706 08
- PERKINS, G. S.**
Air-Lubricated Lead Screw
NPO-15617 B83-10101 07
Test-Bench Dynamometer
NPO-15084 B83-10441 07
- PERREAULT, W. T.**
Low-Thermal-Resistance Baseplate Mounting
MFS-25908 B83-10613 06
- PESSIN, R.**
Expander for Thin-Wall Tubing
MFS-19739 B83-10203 07
- PETERSEN, G. R.**
Yeasts With Increased Glycogen Levels
NPO-15571 B83-10601 05
- PIFFNER, H. J.**
NRZ Data Asymmetry Corrector and Convolutional Encoder
MSC-20187 B83-10133 02
- PHILIPP, W. H.**
In Situ Cross-Linking of Polyvinyl Alcohol Films
LEW-13135 B83-10578 04
- PHILLIPS, W. M.**
Sialon Electrodes and Insulators for MHD Device
NPO-14945 B83-10352 04
- PICHAICHANARONG, P.**
Supercritical-Multiple-Solvent on From Coal
NPO-15767 B83-10153 04
- PICKETT, H. M.**
Directional Coupler With Increased Directivity
NPO-15892 B83-10252 01
Catalog of Spectral Lines
NPO-15181 B83-10556 03
- PICKHARDT, V.**
IC Fabrication Methods Improve Laser Diodes
LAR-13059 B83-10692 08
- PIERCE, W. B.**
Shielding Electric Connectors From Lightning
NPO-15688 B83-10511 01
- PINERA, C.**
Measuring Software-Execution Time
KSC-11267 B83-10278 02
- PIRICH, R. A.**
Solidifying Bi/MnBi at Low Gravity
MFS-25736 B83-10044 04
- PIVIROTTI, T. J.**
Controlling Metal-Halide Vapor Density in Lasers
NPO-15021 B83-10310 03
- PLEWS, G. S.**
Electronic Dilatometer
GSC-12738 B83-10168 06
- POIT JR., W.**
Solidifying Bi/MnBi at Low Gravity
MFS-25736 B83-10044 04
- POLLACK, M., H.**
Transporter for Treated Sheet Materials
MSC-20332 B83-10204 07
- POLLOCK, G. E.**
Measuring Diffusion and Recombination Polycrystalline Silicon
ARC-11431 B83-10040 04
- POMPLUN, A. R.**
Sonic-Pump Levitator
MFS-25828 B83-10462 08
- POND, R.**
Microyield Stress in Composite Materials
MFS-25709 B83-10639 06
- POORMAN, R. M.**
Furnace for Rapid Heating and Cooling
MFS-25707 B83-10597 04
- POPINSKI, Z.**
Air-Conditioning for Electric Vehicles
NPO-15183 B83-10549 03
- POSNER, E. C.**
Dual-Rate Transmission Reduces Weather Effects
NPO-15807 B83-10280 02
- POWERS, J. K.**
Fabricating Grating Couplers on Optical Fibers
MSC-20286 B83-10019 03
- POYNTER, R. L.**
Catalog of Spectral Lines
NPO-15181 B83-10556 03
- PRATHER, D. R.**
Adhesive Removal From Protective Clothing
KSC-11017 B83-10482 08
- PREMYSL, J.**
Retrofitting Vibration Dampers
MFS-19790 B83-10685 07
- PRICE, W. E.**
The Effect of Cosmic Rays on MSI Devices
NPO-15779 B83-10263 01
Radiation-Hardness Data For Semiconductor Devices
NPO-15787 B83-10507 01
- PRIMUS, H. C.**
Displaying Force and Torque of A Manipulator
NPO-15942 B83-10529 02
- PRISK, A. L.**
Improved Connector Shell for Cable Shields
NPO-15584 B83-10006 01
- PROGAR, D. J.**
Hot-Melt Adhesive Attachment System
LAR-12894 B83-10109 08
- PROUT, R. E.**
Barrier Self for Hydraulic Actuators
MSC-20390 B83-10655 06

Q

- QADER, S. A.**
One-Step Coal Liquefaction
NPO-15891 B83-10326 04
Catalytic Coal Liquefaction With Iron Sulfate
NPO-15727 B83-10589 04
- QUAN, M.**
Gas-Temperature Measurement With Minimal Perturbation
MSC-20338 B83-10061 06

R

- RACKLEY, T. S.**
Metering Baffle for Turbine-Blade Cooling
MFS-25849 B83-10424 07
- RAHMAT-SAMII, Y.**
Estimating Waveguide Feed Directivity and Spacing
NPO-15603 B83-10144 03
- RAIBERT, M. H.**
Integrated Tactile Sensor for Robots
NPO-15094 B83-10610 06
- RAMER, G. O.**
Optical-Fiber-to-Channel-Waveguide Coupler
NPO-15555 B83-10029 03

RAMER, O. G.

RAMER, O. G.
Grating Demultiplexers for Optical
Signals
LAR-12748 AND LAR-12749
B83-10147 03

RAMOHALLI, D. N. R.
Acoustic Emissions Reveal
Combustion Conditions
NPO-15699 B83-10140 03

RAMOHALLI, K.
Forming Mirrors on Composite
Materials
NPO-15912 B83-10215 08

RAMOHALLI, K. N.
Acoustic Imaging of Combustion
Noise
NPO-15698 B83-10547 03
Binder for Carbon-Fiber Coating
NPO-14988 B83-10579 04

RANDOLPH, J. L.
Training Simulator for Fire
Management
MFS-25898 B83-10495 09

RATEKIN, G. H.
Proposed Short-Throat Supersonic
Nozzles
MFS-19759 B83-10067 06
Supersonic-Nozzle Shock-Wave
Analysis
MFS-19753 B83-10656 06

RATHOD, M. S.
Determining Solar-Cell Operating
Temperature
NPO-15449 B83-10010 01

RATHZ, T. J.
Automated Magnetic Susceptibility
Analysis
MFS-25935 B83-10592 04

RAU, T. R.
Panel Analysis and Sizing Code
LAR-13004 B83-10393 06

READ, W. S.
Polymeric Applications in Electronics
NPO-16081 B83-10235 08

REED, M. W.
Low-Weight Inserts for Aluminum
Honeycomb Panels
MSC-20227 B83-10116 08

REEDY, J. S.
Remotely-Operated Traffic Control
Light
ARC-11406 B83-10512 01

REICHMAN, B.
Determining the Point of Zero Zeta
Potential in Solid Samples
LAR-12893 B83-10026 03

REIGHARD, W. M.
Fabrication of Graphite/Epoxy
Column Elements
LAR-12915 B83-10115 08

REILLY, W. W.
Making Thermoplastics
Flame-Resistant
NPO-14857 B83-10363 04

REINHARDT, V.
Temperature-Averaging Thermal
Probe
GSC-12795 B83-10614 06

RENNELS, D. A.
Self-Checking Memory Interface
NPO-15889 B83-10521 02

RENNISON, D. C.
Noise Control in Propeller-Driven
Aircraft
LAR-12954 B83-10049 06

REVERE, W. R.
Airflow Assists Solar Receiver
NPO-15784 B83-10545 03

RHEA, R.
Pressure-Driven Waterflow Cleaning
Device
MFS-19638 B83-10679 07

RHEINFURTH, M.
Strain Analysis of Graphite/Epoxy
Vessels
MFS-27018 B83-10714 08

RHEINFURTH, M. H.
Pseudo-Random Number
Generators
MFS-27017 B83-10736 09

RHIM, W. K.
Electrostatic Levitator With Feedback
Control
NPO-15553 B83-10228 08

RHODES, C.
Least-Squares Prediction of Solar
Activity
MFS-25870 B83-10303 03

RHODES, C. M.
Preserving Color in Developed
Photographic Film
MFS-23250 B83-10037 04

RICHARDS, C. W.
Drilling Precise Orifices and Slots
MSC-20053 B83-10091 07

RICHARDSON, V.
Attaching Chuck Keys to Machine
Tools
KSC-11249 B83-10684 07

RICHTER, R.
Ionic Refrigerator
NPO-15288 B83-10320 03

RIEDY, J.
Improved Gas Seal for Electrolytic
Cells
NPO-15163 B83-10366 04

RIEDY, J.
Ion Engine With Solid-Electrolyte Ion
Generator
NPO-15809 B83-10548 03

RIEDY, J.
Oxidation Protection for
Thermocouples
NPO-15605 B83-10710 08

RIEDY, J.
Electrodeposition Repair of Damaged
Metal Parts
MFS-19783 B83-10221 08

RIPPEL, W. E.
Improved Two-Phase Switching
Regulator
NPO-15172 B83-10267 01

RIPPEL, W. E.
Simplified High-Power Inverter
NPO-15961 B83-10499 01

RIPPEL, W. E.
Energy-Saving Inverter
NPO-15291 B83-10500 01

RIPPLE, W. E.
Using a PFET To Commutate an
SCR
NPO-15282 B83-10253 01

RITCHIE, R. S.
Reusable Release Mechanism
MSC-20080 B83-10666 07

RIVIN, J. M.
Bonded Lockstitch for Insulating
Blankets
MSC-20283 B83-10688 08

ROBERTS, M. L.
Robotic Water Blast Cleaner
MFS-25519 B83-10092 07

ROBERTSON JR., C.
Ceramic Solar Receiver
NPO-15769 B83-10314 03

PERSONAL AUTHOR INDEX

High-Temperature Helical-Tube Solar
Receiver
NPO-15768 B83-10565 03

ROBERTSON, M. D.
Checking Weld Composition
MFS-19628 B83-10481 08

ROBINSON, R. L.
Containerless-Processing Module
NPO-14932 B83-10479 08

ROCKEY, D. E.
Two-Stage Off-Axis Cylindrical Solar
Concentrator
NPO-15484 B83-10295 03

ROCKEY, D. E.
Modeling of Solar Concentrators
NPO-15034 B83-10562 03

RODRIGUEZ, R. C.
Training Simulator for Fire
Management
MFS-25898 B83-10495 09

ROGERS JR., J. L.
System for Structural Synthesis
Combines Finite-Element Analysis and
Optimization Programs
LAR-13046 B83-10623 06

ROHATGI, A.
Ti/Pd/Cu Contacts for
Semiconductor Devices
NPO-15043 B83-10268 01

ROHATGI, N. K.
Desulfurizing Coal By Chlorinolysis
and Hydrogenation
NPO-15304 B83-10034 04

ROHATGI, N. K.
Dewatering Peat With Activated
Carbon
NPO-15113 B83-10365 04

ROISON, A.
Probe Array for Testing
Printed-Circuit Substrates
GSC-12759 B83-10059 06

ROSS JR., R. G.
Developing Standards for
Photovoltaic Devices
NPO-15734 B83-10130 01

ROSS JR., R. G.
Designing Flat-Plate Photovoltaic
Arrays
NPO-15729 B83-10305 03

ROSS JR., R. G.
Predicting Solar Deficits
NPO-15667 B83-10561 03

ROSSER, R. W.
Perfluoroalkylene-Ether Triazine
Elastomers
ARC-11402 B83-10335 04

ROTTA JR., J. W.
Improved Connector Shell for Cable
Shields
NPO-15584 B83-10006 01

ROUTH, G. F.
Controlling TV-Camera f-Stop
Remotely
KSC-11269 B83-10550 03

ROWLAND, C. W.
Measuring Excess Noise in SDL's
LAR-12938 B83-10004 01

ROWLETTE, J. J.
Manometer Measures Gas Flow
NPO-15686 B83-10178 06

ROWLETTE, J. J.
'Fuel Gage' for Electric Vehicles
NPO-15759 B83-10277 02

ROYSER, D. M.
Charge Efficiency Tests of Lead/Acid
Batteries
NPO-15869 B83-10281 02

ROYSER, D. M.
Curved Caps Raise Corrugation
Strength
LAR-12884 B83-10105 08

- J-Channel Locks Potting to
Compression Panel
LAR-12913 B83-10179 06
- RUGGLES, S. L.**
Measuring Excess Noise in SDL's
LAR-12938 B83-10004 01
- RUOFF, C. F.**
Three-Fingered Robot Hand
NPO-15959 B83-10409 07
Memory-Metal Electromechanical
Actuators
NPO-15960 B83-10661 07
- RUSSELL, D. J.**
Thermal Radiation Model
Renodalization
MSC-20348 B83-10073 06
- RYAN, J. P.**
Software Specification Language
MFS-23737 B83-10244 09
- S**
- SAFFREN, M. M.**
Electrostatic Levitator With Feedback
Control
NPO-15553 B83-10228 08
- SAHA, H.**
Bricks and Cans for Thermal
Storage
MFS-25625 B83-10315 03
- SALAMA, M. A.**
Estimating Design Loads in Coupled
Vibrating Structures
NPO-14872 B83-10182 06
Methods for Estimating
Payload/Vehicle Design Loads
NPO-15550 B83-10184 06
- SALAZAR, R. P.**
Containerless-Processing Module
NPO-14932 B83-10479 08
- SALERNO, L.**
Motorized Cryogenic Valve
ARC-11452 B83-10687 07
- SALISBURY, J. K.**
Three-Fingered Robot Hand
NPO-15959 B83-10409 07
- SALOMON, P. M.**
Eliminating 'Hotspots' in Digital Image
Processing
NPO-15684 B83-10527 02
- SALTZMAN, E. J.**
Improved Cattle Hauler
FRC-11058 B83-10020 03
- SALYER, I. O.**
Improved Polyimide Intumescent
Coating
ARC-11369 B83-10338 04
- SAMPSON, W. J.**
Locking Corners Speed Solar-Array
Frame Assembly
NPO-15750 B83-10697 08
- SARBOLOUKI, M. N.**
Self-Cleaning Tubular-Membrane
Module
NPO-15245 B83-10100 07
- SAXELBY, R.**
Burner-Injector-Post Tip
MFS-19827 B83-10683 07
- SAYLOR, C. R.**
Fast Electronic Solar Cell Tester
NPO-15676 B83-10011 02
- SCHAFER, A.**
Measuring Coating Thickness
MFS-25633 B83-10398 06
- SCHAIRER, E.**
General Aviation Synthesis Program
ARC-11434 B83-10396 06
- SCHIEDT, D. C.**
Predicting Noise in Complex Aircraft
Structures
LAR-13032 B83-10616 06
- SCHINDLER, R. A.**
Lensless Image Scanner
NPO-16004 B83-10553 03
- SCHMID, F.**
Growing Single Crystals From
Low-Purity Silicon
NPO-15538 B83-10472 08
- SCHMIT JR., L. A.**
Minimizing Weight of Structural
Designs
LAR-13107 B83-10624 06
- SCHMIT, F. M.**
Studies of the Inverted Meniscus
Deposition of Silicon on Ceramic
NPO-15602 B83-10234 08
- SCHROEDER, J. E.**
Absorbable-Susceptor Welding of
Ceramics
NPO-15640 B83-10217 08
- SCHROFF, R. A.**
Level Sensor for Cryogenic Fluids
MSC-20302 B83-10009 01
- SCHUBERT, W. W.**
Yeasts With Increased Glycogen
Levels
NPO-15571 B83-10601 05
- SCHULDT, S. B.**
Studies of the Inverted Meniscus
Deposition of Silicon on Ceramic
NPO-15602 B83-10234 08
- SCHULER, F.**
Dye Indicators for Acidic or Basic
Surface Contamination
MFS-19387 B83-10580 04
- SCHUSZLER II, A.**
Electrical Dissipation Measurement of
Polymer Phase Transitions
LAR-12861 B83-10053 06
- SCHWARZE, G. E.**
Electronic-Power-Transformer Design
Guide
LEW-13208 B83-10131 01
- SCHWUTTKER, G. H.**
Oscillating-Crucible Technique for
Silicon Growth
NPO-15938 B83-10455 08
Silicon-Film Growth by Continuous
Edge-Supported Melt Skimming
NPO-15532 B83-10731 08
- SCOTT-MONCK, J.**
Low-Cost GaAs Solar Cells
NPO-14914 B83-10476 08
- SEALE, B. L.**
Two-Wire to Four-Wire Audio
Converter
KSC-11256 B83-10003 01
- SEIDENSTICKER, R. G.**
Improved Radiative Control of Ribbon
Growth
NPO-15916 B83-10456 08
- SEIDLER, J. E.**
Drilling Precise Orifices and Slots
MSC-20053 B83-10091 07
- SEIGGUM, E. P.**
Securing Identification Sleeving
MFS-19685 B83-10716 08
- SEKERCIOGLU, I.**
Making SixNyCz Fibers by Pyrolysis
MFS-25621 B83-10585 04
- SELCUK, M. K.**
Fuse Protects Parabolic-Dish Solar
Collector
NPO-15662 B83-10148 03
- SEMMELE, M. L.**
Sample Holder for Cryogenic
Adhesive Shear Test
MFS-25729 B83-10060 06
- SENER, H. F.**
Hole-Center Locating Tool
KSC-11248 B83-10412 07
- SESHAN, P. K.**
Acoustic Emissions Reveal
Combustion Conditions
NPO-15699 B83-10140 03
Acoustic Imaging of Combustion
Noise
NPO-15698 B83-10547 03
- SHARPE, M. H.**
Robotic Water Blast Cleaner
MFS-25519 B83-10092 07
Sealant Applicator for Fastener
Heads
MFS-25922 B83-10487 08
- SHEARIN JR., W. A.**
J-Channel Locks Potting to
Compression Panel
LAR-12913 B83-10179 06
- SHEPARD JR., N. F.**
Photovoltaic Roofs
NPO-15881 B83-10453 08
- SHEPPARD, A. T.**
Fire-Resistant TFE Extrusions
MFS-25917 B83-10577 04
- SHERMAN, A.**
Cooling by Para-to-Ortho-Hydrogen
Conversion
GSC-12770 B83-10024 03
- SHLICHTA, P. J.**
Absorbable-Susceptor Welding of
Ceramics
NPO-15640 B83-10217 08
Pressure-Reduction Technique for
Crystal Growth
NPO-15772 B83-10226 08
Uncooled IR Detector
NPO-14832 B83-10265 01
Purifying Silicon During Crystal
Growth
NPO-14831 B83-10730 08
- SHORT, J. R.**
High-Temperature, Low-Gravity
Casting Furnace
MFS-25605 B83-10596 04
- SHU, J. Y.**
Subcritical Wing Design Code
LAR-12959 B83-10193 06
- SHU, L. C.**
In Situ Cross-Linking of Polyvinyl
Alcohol Films
LEW-13135 B83-10578 04
- SHULL, T. A.**
Measuring Excess Noise in SDL's
LAR-12938 B83-10004 01
- SHURNEY, R. E.**
High-Temperature, Low-Gravity
Casting Furnace
MFS-25605 B83-10596 04
- SIEGEL, G.**
Roof Support Near Coal-Mining
Face
NPO-15165 B83-10431 07
- SIEVERS, M. W.**
Self-Checking Memory Interface
NPO-15889 B83-10521 02

SILVA, F.

- SILVA, F.**
Algorithm for Constructing Contour Plots
ARC-11441 B83-10490 09
- SIMMONS, J.**
Etchants for Some Corrosion-Resistant Metals
MFS-25467 B83-10586 04
- SIMMONS, N. E.**
Level Sensor for Cryogenic Fluids
MSC-20302 B83-10009 01
- SIMON, W. E.**
Swirl Diffuser
MSC-18996 B83-10173 06
- SIMPSON, B.**
Characterizing Shear Properties of Membranes
MFS-25745 B83-10057 06
Analyzing Vibrations in a Long Mast
MFS-25746 B83-10641 06
- SINCLAIR, R.**
Making SixNyCz Fibers by Pyrolysis
MFS-25621 B83-10585 04
- SKLADANY, J.**
Thermal Radiation Analyzer System
GSC-12783 B83-10626 06
- SKUTCH, M. E.**
Improved Radiative Control of Ribbon Growth
NPO-15916 B83-10456 08
Melt-Level Sensing in Silicon-Web Growth
NPO-15356 B83-10473 08
- SMETANA, P.**
Oscillating-Crucible Technique for Silicon Growth
NPO-15938 B83-10455 08
- SMIALEK, J. L.**
Oxidation-Resistant Slurry Coating for Carbon-Based Materials
LEW-13951 B83-10572 04
- SMIRLOCK, M.**
Vertical-Control Subsystem for Automatic Coal Mining
MFS-25811 B83-10659 07
- SMITH, D.**
Feedthrough Seal For High-Pressure Vessel
MSC-20625 B83-10502 01
- SMITH, D. F.**
Tool Support Ring
MFS-19765 B83-10665 07
- SMITH, H.**
Automatic Guidance System for Welding Torches
MFS-25807 B83-10690 08
- SMITH, J.**
Dispensing Small Measured Volumes of Liquid
MFS-25690 B83-10056 06
- SMITH, J. G.**
Tool for Tightening Bolts With Knurled Heads
MFS-25694 B83-10436 07
- SMITH, J. L.**
Optical Measurement of Particle Size and Velocity
MFS-27036 B83-10554 03
- SMITH, K. A.**
Training Simulator for Fire Management
MFS-25898 B83-10495 09
- SMITH, S. F.**
Central Control of Local Oscillator Frequencies
GSC-12804 B83-10533 02

- SMITH, S. R.**
Simulating Atmospheric Turbulence
MFS-25850 B83-10377 06
- SNITZER, B. A.**
Calcium Free Asbestos for Fuel Cells
MSC-20207 B83-10154 04
- SOYKIN, C.**
Standards for Epoxies Used in Microelectronics
MFS-25810 B83-10042 04
- SPENCER, J. M.**
A One-Hand Nut and Bolt Assembly Tool
MFS-19691 B83-10677 07
- SPERBER, H. H.**
Gelled Anti-icing Agents
MSC-20088 B83-10036 04
- SPIEGEL, K. W.**
Controlling the Focus in Electron-Beam Welders
MFS-19814 B83-10664 07
- SPIVAK, A.**
Motorized Cyrogenic Valve
ARC-11452 B83-10687 07
- SPRETTER, J.**
Solutions of Transonic Flow in Turbomachines
LEW-13896 B83-10186 06
- ST. CLAIR, T. L.**
Aromatic Polyimides With Group VI Linkages
LAR-12980 B83-10031 04
Hot-Melt Adhesive Attachment System
LAR-12894 B83-10109 08
- STAHARA, S.**
Solutions of Transonic Flow in Turbomachines
LEW-13896 B83-10186 06
- STANFORD, R. H.**
Planning Transport and Manufacturing for Lowest Cost
NPO-15391 B83-10123 09
- STANICH, C. G.**
Improved Infrared Multispectral Scanner
NPO-16143 B83-10552 03
- STEELE, H. L.**
Cost Effectiveness of Hybrid Solar Powerplants
NPO-15735 B83-10149 03
- STEIN, B. A.**
Hot-Melt Adhesive Attachment System
LAR-12894 B83-10109 08
- STEIN, J. A.**
Reusable High-Pressure Connector
MSC-20339 B83-10097 07
- STEINBRUEGGE, K. B.**
Melt-Level Sensing in Silicon-Web Growth
NPO-15356 B83-10473 08
- STELZRIED, C. T.**
Determining the Nonlinearity of Microwave Receivers
NPO-15355 B83-10536 02
- STEPHAN, E. S.**
Safe Emergency Evacuation From Tall Structures
KSC-11225 B83-10643 06
- STEPHANPOULOS, M. F.**
Three-Zone Catalyst Resists Sulfur Poisoning
NPO-14827 B83-10356 04

PERSONAL AUTHOR INDEX

- Hydrogen Production From Heavy Fuels
NPO-14826 B83-10362 04
Removing Sulfur Dioxide From Flue Gases
NPO-15758 B83-10593 04
- STEPHENS, J. B.**
Gas-Bearing Crucible for Shot Tower
NPO-15070 B83-10229 08
Stabilizing Crystal Oscillators With Melting Metals
NPO-15641 B83-10257 01
Trace-Level Solid-Polymer Electrolyte Hygrometer
NPO-15722 B83-10645 06
- STEPHENSON, J. G.**
Measuring Small Leak Holes
MSC-20113 B83-10063 06
- STEWART, D. A.**
Two-Layer Glass Thermal-Control Coating
ARC-11164 B83-10573 04
- STIRN, R. J.**
Low-Cost GaAs Solar Cells
NPO-14914 B83-10476 08
- STOCKS, C. D.**
Charged Particle Flux Sensor
MFS-25461 B83-10021 03
- STOKES, B. O.**
Yeasts With Increased Glycogen Levels
NPO-15571 B83-10601 05
- STOLTZFUS, J. M.**
Bender/Coiler for Tubing
MSC-20410 B83-10206 07
- STOMS, R. M.**
Transformer and Meter Tester
MFS-19708 B83-10681 07
- STOTT, F. R.**
Hardware Fault Simulator Generates Test Vectors For Complex IC's
NPO-15362 B83-10538 02
- STRANGELAND, M. L.**
Radially-Graduated ture Profile
MFS-19831 B83-10607 06
- STREITMATTER, R. E.**
Silicone Cerenkov-Radiator Material
GSC-12805 B83-10328 04
- STRODE, J. P.**
Automatic Control of Multimedia Shows
KSC-11080 B83-10286 02
- STROOPE, C. R.**
Electronic Dilatometer
GSC-12738 B83-10168 06
- STROUD, W. J.**
Panel Analysis and Sizing Code
LAR-13004 B83-10393 06
- STUCKENBERG, F. H.**
Membrane Switches Check Seal Pressure
MSC-20468 B83-10373 06
- STUDER, P. A.**
Passive Magnetic Bearing
GSC-12726 B83-10085 07
Low-Vibration Oscillating Compressor
GSC-12799 B83-10658 07
- SUGG, F. E.**
Determining the Orientation of Anisotropic Materials
MSC-20229 B83-10054 06
- SVERRE, E. T.**
Measuring Delay in Lasers
NPO-15242 B83-10558 03

- SWAIN, D.**
Optical Turbopump Speed Sensor
MFS-19794 B83-10651 06
- SWIRLSLEY, A. J.**
Light, Serviceable Insulation Blanket
MSC-20452 B83-10220 08
- SYDNOR, R. L.**
Efficient Distribution of
Frequency-Standard Signals
NPO-15392 B83-10012 02
- SZOFRAN, F. R.**
Growing Crystals for Infrared
Detectors
MFS-25786 B83-10465 08
- T**
- TABAOFF, W.**
Calculating the Flow Field in a Radial
Turbine Scroll
LEW-13437 B83-10104 07
- TALLEY JR., G. L.**
Two-Wire to Four-Wire Audio
Converter
KSC-11256 B83-10003 01
Status Panel For Video Cassette
Recorders
KSC-11254 B83-10532 02
Controlling TV-Camera f-Stop
Remotely
KSC-11269 B83-10550 03
- TALLON, J. M.**
Add-On Shielding for Unshielded
Wire
NPO-15107 B83-10007 01
- TAM, C. K.**
Reduced Aircraft-Engine Noise
LAR-12890 B83-10048 06
- TANNA, H. K.**
Reduced Aircraft-Engine Noise
LAR-12890 B83-10048 06
- TATOM, F. B.**
Simulating Atmospheric Turbulence
MFS-25850 B83-10377 06
- TAYLOR, A. H.**
Vortex Lift Augmentation by Suction
LAR-12969 B83-10071 06
- TAYLOR, L. L.**
Removing Images From Microfilm
NPO-15146 B83-10353 04
- TAYLOR, W. A.**
Research and Development Mission
Analysis System
GSC-12847 B83-10741 09
- TEASLEY, G.**
Feedthrough Seal For High-Pressure
Vessel
MSC-20625 B83-10502 01
- THIBODEAUX, J. J.**
Cooldown Strategy for Cryogenic
Wind Tunnels
LAR-13012 B83-10617 06
- THOMAS, J. J.**
Packed Alumina Absorbs Hypergolic
Vapors
KSC-11278 B83-10569 04
- THOMAS, P.**
Code Solves Three-Dimensional
Navier-Stokes Equations
LAR-12962 B83-10075 06
- THOMAS, S. D.**
Transonic Airfoil Analysis
ARC-11436 B83-10395 06
- THOMPSON JR., W. J.**
Analyzing Flow Fields in
Axial-Compressor Rotors and Stators
LEW-13910 B83-10629 06
- THOMPSON, A. R.**
Shock Mounting for Heavy Machines
MFS-25888 B83-10420 07
- THOMPSON, R. G.**
Microfissuring in Nickel-Based-Alloy
Welds
MFS-25815 B83-10340 04
Hot Microfissuring in Nickel Alloy
MFS-25763 B83-10587 04
- THOMPSON, R. R.**
Erectable Space-Construction
Fixture
MSC-20259 B83-10469 08
- THORNHILL, J. W.**
Proposed Technique of
Crystal-Ribbon Growth
NPO-15629 B83-10474 08
- THORNTON, M. G.**
Detection of Floating Inputs in Logic
Circuits
LAR-13073 B83-10528 02
- THURLOW, P.**
Submillisecond Optical Knife-Edge
Testing
GSC-12740 B83-10025 03
- TILLER, W. A.**
Interface Instability During Crystal
Growth
MFS-25841 B83-10468 08
- TIMOC, C. C.**
Hardware Fault Simulator Generates
Test Vectors For Complex IC's
NPO-15362 B83-10538 02
- TOLPEN, J.**
Flow-Straightener Sleeve for Pump
Valve
MFS-19781 B83-10385 06
- TOWNSEND, J. C.**
Interactive Graphics Analysis for
Aircraft Design
LAR-12951 B83-10194 06
QUICK Interactive Graphics Analysis
LAR-12952 B83-10394 06
- TRINER, J.**
Printed Circuit Converts RF Energy
to dc Power
LEW-13913 B83-10002 01
- TRINH, E.**
Acoustical-Levitation Chamber for
Metallurgy
NPO-15453 B83-10117 08
- TRINH, E. H.**
Contactless Measurement of Physical
Properties
NPO-15839 B83-10296 03
- TROMBKA, J. I.**
Neutron Probe of Building-Wall
Composition
GSC-12808 B83-10541 03
- TRUBERT, M. R.**
Estimating Design Loads in Coupled
Vibrating Structures
NPO-14872 B83-10182 06
Methods for Estimating
Payload/Vehicle Design Loads
NPO-15550 B83-10184 06
- TRUJILLO, D. D.**
Torque-Wrench Extension Arm
NPO-15495 B83-10447 07
- TRUSCELLO, V. C.**
Parabolic Solar Collectors
NPO-15674 B83-10564 03
- TUBBS, E. F.**
Collecting Light From Point Images
NPO-15887 B83-10542 03
- U**
- UHLMANN, D. R.**
Dissolving Bubbles in Glass
NPO-15105 B83-10347 04
- UNDERWOOD, J. H.**
Normal-Incidence Soft-X-Ray Mirror
NPO-15828 B83-10145 03
High-Resolution X-Ray Telescope
NPO-15971 B83-10551 03
- UNDERWOOD, J. W.**
Computation of Bragg Reflection for
Layered Microstructures
NPO-15880 B83-10300 03
- UNRUH, J. F.**
Predicting Noise in Complex Aircraft
Structures
LAR-13032 B83-10616 06
- UTTER, M. G.**
Blowing Dust Away With Electrostatic
Wind
HQN-10936 B83-10261 01
- V**
- VADAKAN, V. V.**
Connecting Separate Computers to
a Common Bus
NPO-15433 B83-10289 02
- VAN ARK, W.**
Motorized Cryogenic Valve
ARC-11452 B83-10687 07
- VARMA, I. K.**
Elastomer-Modified Polyimides
ARC-11400 B83-10336 04
Improved Thermosetting Imide
Resins
ARC-11368 B83-10341 04
- VAVRUS, J. L.**
A File Archival System
NPO-16274 B83-10735 09
- VELEGA, D.**
Checking Surface Contours
MSC-20318 B83-10052 06
- VERBER, C. M.**
Pairwise Comparison of Voltage
Sets
LAR-12929 B83-10256 01
- VERDERAIME, V.**
Strain Analysis of Graphite/Epoxy
Vessels
MFS-27018 B83-10714 08
- VESSOT, R.**
Improved Coil for Hydrogen
Dissociators
MFS-25638 B83-10262 01
- VOECKS, G. E.**
Three-Zone Catalyst Resists Sulfur
Poisoning
NPO-14827 B83-10356 04
Hydrogen Production From Heavy
Fuels
NPO-14826 B83-10362 04
Destroying Toxic Wastes
NPO-15655 B83-10582 04
- VON PRAGENAU, G. L.**
Damping Seals for Turbomachinery
MFS-25834 B83-10437 07

VON TIESENHAUSEN, G.

PERSONAL AUTHOR INDEX

- VON TIESENHAUSEN, G.**
Control of Self-Replicating Systems
MFS-25865 B83-10494 09
- VONROOS, O.**
Gas-Jet Meniscus Control in Ribbon
Growth
NPO-14978 B83-10112 08
- Electron Beam Could Probe
Recombination Centers
NPO-15285 B83-10141 03
- VORREITER, J.**
Fluid/Vapor Separator for Variable
Flow Rates
ARC-11401 B83-10299 03
- Motorized Cryogenic Valve
ARC-11452 B83-10687 07
- VUSKOVIC, M. I.**
Three-Level Control of Manipulators
NPO-15048 B83-10493 09

W

- WADE, D. C.**
Rewaterproofing Silica Tiles
MSC-20340 B83-10111 08
- WADE, T. E.**
Processes for VLSI Circuits
MFS-25857 B83-10708 08
- WAGNER, W. R.**
Proposed Short-Throat Supersonic
Nozzles
MFS-19759 B83-10067 06
- Suppressing Transient Side Loads in
Supersonic Nozzles
MFS-19769 B83-10379 06
- Liquid-Nitrogen Test for Blocked
Tubes
MFS-19762 B83-10382 06
- Radially-Graduated
ture Profile
MFS-19831 B83-10607 06
- Supersonic-Nozzle Shock-Wave
Analysis
MFS-19753 B83-10656 06
- Nonseparating High-Area-Ratio
Supersonic Nozzles
MFS-19758 B83-10657 06
- Burner-Injector-Post Tip
MFS-19827 B83-10683 07
- Ribbed Coolant Liners for
Combustion Chambers
MFS-19829 B83-10696 08
- WALKER, M. A.**
More-Uniform Heat Curing for
Structural Repairs
MSC-20101 B83-10114 08
- WALKER, S.**
Thermal and Flow Data From
Liquid-Oxygen System
KSC-11265 B83-10635 06
- WALKER, W. L.**
Testing Large Solar Mirrors
NPO-15404 B83-10294 03
- WALKLEY, K. B.**
Wing Subsonic Aerodynamic
Performance Estimates
LAR-12987 B83-10079 06
- WALL, R. J.**
Sharp-Focus Composite Microscope
Imaging by Computer
NPO-15207 B83-10167 05
- Computer Analysis of Eye
Blood-Vessel Images
NPO-15527 B83-10371 05

- WALL, W.**
Automatic Guidance System for
Welding Torches
MFS-25807 B83-10690 08
- WALL, W. A.**
Tool for Tightening Bolts With
Knurled Heads
MFS-25694 B83-10436 07
- WALSH, J. V.**
Monitoring the Thickness of
Coal-Conversion Slag
NPO-15371 B83-10397 06
- WANG, D. S.**
Fitting Flexible Coverings to
Contoured Surfaces
MSC-20503 B83-10691 08
- WANG, K. L.**
Thermal Elastohydrodynamic
Lubrication of Spur Gears
LEW-13528 B83-10213 07
- WANG, T.**
Low-Density High-Strength Foamed
Materials
NPO-15411 B83-10575 04
- WANG, T. G.**
Attitude Control by Localized
Outgassing
NPO-15575 B83-10113 08
- Acoustical-Levitation Chamber for
Metallurgy
NPO-15453 B83-10117 08
- Phase Modulation Varies Average
Acoustic Torque
NPO-15689 B83-10227 08
- Contactless Measurement of Physical
Properties
NPO-15839 B83-10296 03
- Packaging Nuclear and Chemical
Waste for Disposal
NPO-15454 B83-10348 04
- Containerless-Processing Module
NPO-14932 B83-10479 08
- WARD, S. C.**
Hydrogen Masers as Time and
Frequency Standards
NPO-15858 B83-10298 03
- WARD, V. R.**
Reducing the Resistance of
Conductive-Adhesive Bonds
MSC-20427 B83-10219 08
- WARNER, J. L.**
Value-Engineering Review for
Numerical Control
MFS-19664 B83-10480 08
- WATERS, M.**
General Aviation Synthesis Program
ARC-11434 B83-10396 06
- WATSON, E. G.**
Labeling Solar-Cell Modules
NPO-15997 B83-10454 08
- WEBB, D. D.**
High-Temperature, Low-Gravity
Casting Furnace
MFS-25605 B83-10596 04
- WECHSLER, E. R.**
Rounding Technique for High-Speed
Digital Signal Processing
NPO-15307 B83-10014 02
- WEIGAND, B. L.**
Standards for Epoxies Used in
Microelectronics
MFS-25810 B83-10042 04
- WEINBERG, M. C.**
Dissolving Bubbles in Glass
NPO-15105 B83-10347 04

- WELFORD, W. T.**
Two-Stage Off-Axis Cylindrical Solar
Concentrator
NPO-15484 B83-10295 03
- WEN, L. C.**
Cost Effectiveness of Hybrid Solar
Powerplants
NPO-15735 B83-10149 03
- WERNER, A.**
Electroformed Electrodes for
Electrical-Discharge Machining
MFS-19651 B83-10715 08
- WESSELSKI, C. J.**
Tool for Guiding An Auger
MSC-20194 B83-10205 07
- WHANG, V. S.**
Compact Concentrators for Solar
Cells
MFS-25511 B83-10293 03
- WHIFFEN, E. L.**
Hot Forming With Electron-Beam
Welder
MSC-20413 B83-10724 08
- WHITE, B. S.**
Computer Analysis of Eye
Blood-Vessel Images
NPO-15527 B83-10371 05
- WHITE, W.**
Attaching Strain Gages to Composite
Materials
MFS-25867 B83-10378 06
- Modified Oscillograph for Impacting
Composite Materials
MFS-25901 B83-10406 06
- Frame Allines Fibers in Multilayer
Composites
MFS-25959 B83-10706 08
- WHITE, W. T.**
Sample Holder for Cryogenic
Adhesive Shear Test
MFS-25729 B83-10060 06
- WIESENBAUGH, W. T.**
Coil Welding Aid
MSC-20470 B83-10088 07
- WIKER, G. A.**
Measuring Power Flow in Electric
Vehicles
NPO-15514 B83-10138 02
- Extending the Memory of
Microcomputers
NPO-15295 B83-10282 02
- WILBY, J. F.**
Noise Control in Propeller-Driven
Aircraft
LAR-12954 B83-10049 06
- WILKINS, J. R.**
Flowthrough Bacteria-Detection
System
LAR-12871 B83-10164 05
- WILL, H. A.**
Measuring High Gas Temperatures
LEW-13819 B83-10627 06
- WILLIAM, J. G.**
Axial Compressor Design and
Analysis
LEW-13488 B83-10196 06
- WILLIAMS, R.**
Feedthrough Seal For High-Pressure
Vessel
MSC-20625 B83-10502 01
- WILLIS, R. R.**
Making SixNyCz Fibers by Pyrolysis
MFS-25621 B83-10585 04

WILMOTH, R. G.

Transonic, Axisymmetric Flow Over
Nozzle Afterbodies With Supersonic Jet
Exhausts

LAR-12957 B83-10187 06

WILSON, W.

Automated Variable-Polarity
Plasma-Arc Welding

MFS-27042 B83-10722 08

WINKELSTEIN, R. A.

Sideband-Aided Receiver Arrays

NPO-15873 B83-10522 02

WINSLOW, P.

Lightweight Metal Mirrors

GSC-12743 B83-10448 08

WINSTON, R.

Two-Stage Off-Axis Cylindrical Solar
Concentrator

NPO-15484 B83-10295 03

WISE, T. D.

Precise Measurement of Effective

Focal Length

GSC-12745 B83-10023 03

WITHEROW, W. K.

Imaging Fluid Flow

MFS-25897 B83-10543 03

WOELLER, F.

Measuring Diffusion and

Recombination Polycrystalline Silicon

ARC-11431 B83-10040 04

WOJCIECHOWSKI, C. J.

Jet Engines as High-Capacity

Vacuum Pumps

MFS-25791 B83-10199 07

WOO, K. E.

Estimating Waveguide Feed

Directivity and Spacing

NPO-15603 B83-10144 03

WOODS, J. P.

The Effect of Cosmic Rays on MSI

Devices

NPO-15779 B83-10263 01

WOODS, R.

Digital-Image Enhancement

MFS-25679 B83-10530 02

WRAY, A. A.

Simulating a Three-Dimensional Flow

in Pipes

ARC-11466 B83-10638 06

WU, C.

Digital SAR Processor

NPO-15519 B83-10287 02

Automatic Phasing for Active

Antenna Elements

NPO-15920 B83-10524 02

WU, S. C.

Estimating Effects of Flicker Noise in

Clock Signals

NPO-15525 B83-10537 02

WU, T.

Instrumented Pick Detects

Coal/Rock Interface

MFS-25753 B83-10065 06

WYANT, J. C.

Holographic Twyman-Green

Interferometer

NPO-15754 B83-10301 03

Efficiency of Reflection Gratings

NPO-15852 B83-10567 03

WYDEVEN, T.

Silicon Nitride Antireflection Coatings

for Photovoltaic Cells

ARC-11447 B83-10332 04

WYDEVEN, T. J.

High-Flow Asymmetric

Reverse-Osmosis Membranes

ARC-11359 B83-10598 05

Y**YAMAKAWA, K. A.**

Solar-Cell Slide Rule

NPO-15646 B83-10106 08

Sampling of Silicon Powder for

Impurity Analysis

NPO-15840 B83-10590 04

YANG, L. C.

Diesel Particulate Destruction

NPO-15426 B83-10346 04

Crystal Microbalance Monitors

Relative Humidity

NPO-15493 B83-10388 06

Surface-Moisture Monitoring

Technique

NPO-15494 B83-10389 06

YANG, M. M. L.

Trace-Level Solid-Polymer Electrolyte

Hygrometer

NPO-15722 B83-10645 06

YAWS, C. L.

Generating SiF₄ From H₂SiF₆

NPO-15721 B83-10155 04

YEN, S. P. S.

Binder for Carbon-Fiber Coating

NPO-14988 B83-10579 04

YIN, L. I.

Viewer Makes Radioactivity 'Visible'

GSC-12640 B83-10027 03

Improved Gamma-and X-Ray Pinhole

Camera

GSC-12851 B83-10539 03

YOSHINO, S. Y.

Fitting Flexible Coverings to

Contoured Surfaces

MSC-20503 B83-10691 08

YOUNG, J. B.

Precise Measurement of Effective

Focal Length

GSC-12745 B83-10023 03

YOUNGBERG, C. L.

Gas-Bearing Crucible for Shot

Tower

NPO-15070 B83-10229 08

Containerless-Processing Module

NPO-14932 B83-10479 08

YU, Y.

SCM Handbooks for dc-to-dc

Converters

LEW-13886 B83-10258 01

Z**ZACHMAN, C. A.**

Cryogenic Vacuum Pump

NPO-1517 B83-10198 07

ZAK, M.

Mathematical Instability Criteria for

Elastic Structures

NPO-15090 B83-10620 06

ZAK, M. A.

Multivalued-Velocity-Field Model of

Turbulence

NPO-15748 B83-10183 06

Advances in Multivalued-Velocity

Theory of Turbulence

NPO-16006 B83-10622 06

ZAWACKI, R. L.

Three-Level Control of Manipulators

NPO-15048 B83-10493 09

ZEPEDA, J. L.

Gage Measures Recessed Gaps

MSC-20230 B83-10089 07

ZOOK, J. D.

Measuring Diffusion and

Recombination in Polycrystalline

Silicon

NPO-15601 B83-10039 04

Studies of the Inverted Meniscus

Deposition of Silicon on Ceramic

NPO-15602 B83-10234 08

Improved Silicon-Growth Chamber

NPO-15237 B83-10471 08

ZOUTENDYK, J. A.

Gas-Jet Meniscus Control in Ribbon

Growth

NPO-14978 B83-10112 08

ZUCKERWAR, A. J.

In Situ Measurement of

Ground-Surface Flow Resistivity

LAR-13053 B83-10606 06

ZURBURG, F. W.

Low-Pressure Alcohol Distillation

MFS-25516 B83-10345 04

ZWISSLER, J. G.

Evaluation of Structural Cellular

Glass


NPO-15680 B83-10339 04

ORIGINATING CENTER NUMBER INDEX

INDEX TO NASA TECH BRIEFS

DECEMBER 1986

Typical Originating Center Number Index Listing

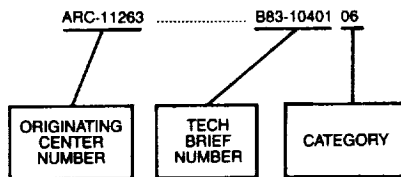

The left hand column identifies the originating Center number, to the right of each originating Center number is the Tech Brief number, e.g., B83-10401, followed by a two-digit number, e.g., 06, which identifies the subject category containing the entire citation.

ARC-11164	B83-10573	04	GSC-12726	B83-10085	07	LAR-12259	B83-10165	05
ARC-11261	B83-10035	04	GSC-12738	B83-10168	06	LAR-12471	B83-10367	05
ARC-11263	B83-10401	06	GSC-12739	B83-10110	08	LAR-12648	B83-10022	03
ARC-11303	B83-10255	01	GSC-12740	B83-10025	03	LAR-12711	B83-10094	07
ARC-11305	B83-10334	04	GSC-12742	B83-10169	06	LAR-12716	B83-10509	01
ARC-11322	B83-10368	05	GSC-12743	B83-10448	08	LAR-12748	B83-10147	03
ARC-11331	B83-10041	04	GSC-12745	B83-10023	03	LAR-12749		
ARC-11349	B83-10422	07	GSC-12751	B83-10449	08	LAR-12765	B83-10675	07
ARC-11354	B83-10047	06	GSC-12753	B83-10171	06	LAR-12785	B83-10068	06
ARC-11359	B83-10598	05	GSC-12756	B83-10146	03	LAR-12815	B83-10053	06
ARC-11361	B83-10387	06	GSC-12759	B83-10059	06	LAR-12861	B83-10051	06
ARC-11363	B83-10605	06	GSC-12761	B83-10142	03	LAR-12862	B83-10164	05
ARC-11368	B83-10341	04	GSC-12762	B83-10701	08	LAR-12871	B83-10105	08
ARC-11369	B83-10338	04	GSC-12770	B83-10024	03	LAR-12884	B83-10375	06
ARC-11384	B83-10180	06	GSC-12771	B83-10408	07	LAR-12887	B83-10048	06
ARC-11388	B83-10046	05	GSC-12773	B83-10421	07	LAR-12890	B83-10026	03
ARC-11400	B83-10336	04	GSC-12782	B83-10497	01	LAR-12893	B83-10109	08
ARC-11401	B83-10299	03	GSC-12783	B83-10626	06	LAR-12894	B83-10559	03
ARC-11402	B83-10335	04	GSC-12788	B83-10247	01	LAR-12897	B83-10515	01
ARC-11404	B83-10668	07	GSC-12789	B83-10066	06	LAR-12900	B83-10717	08
ARC-11406	B83-10512	01	GSC-12794	B83-10380	06	LAR-12904	B83-10631	06
ARC-11431	B83-10040	04	GSC-12795	B83-10614	06	LAR-12908	B83-10179	06
ARC-11434	B83-10396	06	GSC-12799	B83-10658	07	LAR-12913	B83-10115	08
ARC-11436	B83-10395	06	GSC-12801	B83-10628	06	LAR-12915	B83-10090	07
ARC-11438	B83-10279	02	GSC-12802	B83-10630	06	LAR-12922	B83-10072	06
ARC-11441	B83-10490	09	GSC-12803	B83-10739	09	LAR-12924	B83-10078	06
ARC-11446	B83-10491	09	GSC-12804	B83-10533	02	LAR-12925	B83-10392	06
ARC-11447	B83-10332	04	GSC-12805	B83-10328	04	LAR-12926	B83-10392	06
ARC-11452	B83-10687	07	GSC-12808	B83-10541	03	LAR-12927	B83-10256	01
ARC-11464	B83-10343	04	GSC-12816	B83-10501	01	LAR-12929	B83-10383	06
ARC-11466	B83-10638	06	GSC-12824	B83-10618	06	LAR-12930	B83-10151	04
			GSC-12827	B83-10742	09	LAR-12931	B83-10004	01
			GSC-12847	B83-10741	09	LAR-12938	B83-10463	08
			GSC-12851	B83-10539	03	LAR-12939	B83-10062	06
			GSC-12854	B83-10612	06	LAR-12950	B83-10194	06
						LAR-12951	B83-10394	06
						LAR-12952	B83-10049	06
						LAR-12954	B83-10187	06
						LAR-12957	B83-10193	06
						LAR-12959	B83-10704	08
						LAR-12960	B83-10075	06
						LAR-12962	B83-10615	06
						LAR-12968	B83-10071	06
						LAR-12969	B83-10031	04
						LAR-12980	B83-10038	04
						LAR-12981	B83-10082	06
						LAR-12985	B83-10705	08
						LAR-12986	B83-10079	06
						LAR-12987	B83-10369	05
						LAR-12990	B83-10030	03
						LAR-13001	B83-10393	06
						LAR-13004	B83-10617	06
						LAR-13012	B83-10080	06
						LAR-13015	B83-10632	06
						LAR-13026	B83-10616	06
						LAR-13032	B83-10192	06
						LAR-13039	B83-10188	06
						LAR-13042	B83-10623	06
						LAR-13046	B83-10606	06
						LAR-13053	B83-10692	08
						LAR-13059	B83-10603	06
						LAR-13065	B83-10528	02
						LAR-13073	B83-10633	06
						LAR-13086	B83-10609	06
						LAR-13089	B83-10624	06
						LAR-13107		

CENTER

I-59

PRECEDING PAGE BLANK NOT FILMED

PAGE 1-58 INTENTIONALLY BLANK

ORIGINATING CENTER/TECH BRIEF NUMBER INDEX

LAR-13164	B83-10393	06	MFS-19765	B83-10665	07	MFS-25786	B83-10465	08
LAR-13198	B83-10636	06	MFS-19768	B83-10415	07	MFS-25790	B83-10240	09
			MFS-19769	B83-10379	06	MFS-25791	B83-10199	07
			MFS-19781	B83-10385	06	MFS-25798	B83-10172	06
LEW-13135	B83-10578	04	MFS-19783	B83-10221	08	MFS-25802	B83-10506	01
LEW-13208	B83-10131	01	MFS-19788	B83-10423	07	MFS-25803	B83-10381	06
LEW-13437	B83-10104	07	MFS-19789	B83-10413	07	MFS-25807	B83-10690	08
LEW-13488	B83-10196	06	MFS-19790	B83-10685	07	MFS-25809	B83-10236	08
LEW-13505	B83-10191	06	MFS-19793	B83-10426	07	MFS-25810	B83-10042	04
LEW-13528	B83-10213	07	MFS-19794	B83-10651	06	MFS-25811	B83-10659	07
LEW-13626	B83-10671	07	MFS-19796	B83-10689	08	MFS-25815	B83-10340	04
LEW-13674	B83-10195	06	MFS-19797	B83-10466	08	MFS-25821	B83-10239	09
LEW-13728	B83-10127	01	MFS-19814	B83-10664	07	MFS-25825	B83-10137	02
LEW-13740	B83-10103	07	MFS-19827	B83-10683	07	MFS-25828	B83-10462	08
LEW-13778	B83-10077	06	MFS-19829	B83-10696	08	MFS-25829	B83-10460	08
LEW-13818	B83-10081	06	MFS-19831	B83-10607	06	MFS-25834	B83-10437	07
LEW-13819	B83-10627	06	MFS-19837	B83-10693	08	MFS-25837	B83-10407	07
LEW-13832	B83-10629	06	MFS-19851	B83-10695	08	MFS-25841	B83-10468	08
LEW-13842	B83-10102	07	MFS-19859	B83-10619	06	MFS-25848	B83-10425	07
LEW-13842	B83-10076	06	MFS-19884	B83-10672	07	MFS-25849	B83-10424	07
LEW-13854	B83-10189	06	MFS-19892	B83-10652	06	MFS-25850	B83-10377	06
LEW-13862	B83-10190	06	MFS-23250	B83-10037	04	MFS-25852	B83-10249	01
LEW-13886	B83-10258	01	MFS-23721	B83-10284	02	MFS-25854	B83-10248	01
LEW-13896	B83-10186	06	MFS-23737	B83-10244	09	MFS-25857	B83-10708	08
LEW-13910	B83-10629	06	MFS-25161	B83-10600	05	MFS-25861	B83-10125	01
LEW-13913	B83-10002	01	MFS-25171	B83-10197	07	MFS-25863	B83-10254	01
LEW-13921	B83-10662	07	MFS-25172	B83-10005	01	MFS-25865	B83-10494	09
LEW-13951	B83-10572	04	MFS-25211	B83-10251	01	MFS-25867	B83-10378	06
			MFS-25215	B83-10510	01	MFS-25868	B83-10519	01
			MFS-25305	B83-10478	08	MFS-25870	B83-10303	03
MFS-19315	B83-10442	07	MFS-25400	B83-10342	04	MFS-25871	B83-10525	02
MFS-19387	B83-10580	04	MFS-25461	B83-10021	03	MFS-25872	B83-10390	06
MFS-19459	B83-10649	06	MFS-25465	B83-10312	03	MFS-25873	B83-10611	06
MFS-19481	B83-10584	04	MFS-25467	B83-10586	04	MFS-25875	B83-10216	08
MFS-19596	B83-10653	06	MFS-25483	B83-10728	08	MFS-25879	B83-10428	07
MFS-19599	B83-10648	06	MFS-25485	B83-10647	06	MFS-25880	B83-10694	08
MFS-19608	B83-10514	01	MFS-25498	B83-10508	01	MFS-25881	B83-10660	07
MFS-19614	B83-10513	01	MFS-25507	B83-10260	01	MFS-25888	B83-10420	07
MFS-19618	B83-10484	08	MFS-25510	B83-10429	07	MFS-25890	B83-10602	06
MFS-19628	B83-10481	08	MFS-25511	B83-10293	03	MFS-25897	B83-10543	03
MFS-19631	B83-10483	08	MFS-25516	B83-10345	04	MFS-25898	B83-10495	09
MFS-19633	B83-10713	08	MFS-25518	B83-10637	06	MFS-25899	B83-10250	01
MFS-19638	B83-10679	07	MFS-25519	B83-10092	07	MFS-25901	B83-10406	06
MFS-19643	B83-10686	07	MFS-25531	B83-10270	01	MFS-25904	B83-10386	06
MFS-19646	B83-10680	07	MFS-25604	B83-10725	08	MFS-25908	B83-10613	06
MFS-19651	B83-10715	08	MFS-25605	B83-10596	04	MFS-25911	B83-10571	04
MFS-19658	B83-10211	07	MFS-25621	B83-10585	04	MFS-25917	B83-10577	04
MFS-19664	B83-10480	08	MFS-25625	B83-10315	03	MFS-25919	B83-10621	06
MFS-19667	B83-10170	06	MFS-25633	B83-10398	06	MFS-25920	B83-10621	06
MFS-19668	B83-10376	06	MFS-25638	B83-10262	01	MFS-25922	B83-10487	08
MFS-19673	B83-10439	07	MFS-25677	B83-10372	05	MFS-25934	B83-10640	06
MFS-19674	B83-10175	06	MFS-25679	B83-10530	02	MFS-25935	B83-10592	04
MFS-19679	B83-10678	07	MFS-25687	B83-10411	07	MFS-25955	B83-10535	02
MFS-19680	B83-10058	06	MFS-25690	B83-10056	06	MFS-25956	B83-10446	07
MFS-19685	B83-10716	08	MFS-25694	B83-10436	07	MFS-25957	B83-10674	07
MFS-19691	B83-10677	07	MFS-25707	B83-10597	04	MFS-25958	B83-10700	08
MFS-19693	B83-10087	07	MFS-25709	B83-10639	06	MFS-25959	B83-10706	08
MFS-19701	B83-10698	08	MFS-25714	B83-10723	08	MFS-25964	B83-10440	07
MFS-19702	B83-10676	07	MFS-25721	B83-10331	04	MFS-27002	B83-10581	04
MFS-19708	B83-10681	07	MFS-25724	B83-10517	01	MFS-27003	B83-10237	08
MFS-19713	B83-10438	07	MFS-25729	B83-10060	06	MFS-27012	B83-10344	04
MFS-19716	B83-10095	07	MFS-25732	B83-10400	06	MFS-27015	B83-10304	03
MFS-19719	B83-10663	07	MFS-25736	B83-10044	04	MFS-27017	B83-10736	09
MFS-19725	B83-10098	07	MFS-25741	B83-10043	04	MFS-27018	B83-10714	08
MFS-19728	B83-10435	07	MFS-25745	B83-10057	06	MFS-27036	B83-10554	03
MFS-19729	B83-10099	07	MFS-25746	B83-10641	06	MFS-27038	B83-10594	04
MFS-19731	B83-10682	07	MFS-25753	B83-10065	06	MFS-27039	B83-10496	09
MFS-19737	B83-10427	07	MFS-25754	B83-10403	06	MFS-27042	B83-10722	08
MFS-19739	B83-10203	07	MFS-25758	B83-10330	04			
MFS-19742	B83-10374	06	MFS-25761	B83-10470	08	MSC-18996	B83-10173	06
MFS-19747	B83-10207	07	MFS-25763	B83-10587	04	MSC-20053	B83-10091	07
MFS-19748	B83-10673	07	MFS-25766	B83-10333	04	MSC-20078	B83-10045	05
MFS-19752	B83-10391	06	MFS-25767	B83-10157	04	MSC-20079	B83-10132	02
MFS-19753	B83-10656	06	MFS-25767	B83-10159	04	MSC-20080	B83-10666	07
MFS-19758	B83-10657	06	MFS-25771	B83-10711	08	MSC-20088	B83-10036	04
MFS-19759	B83-10067	06	MFS-25772	B83-10212	07	MSC-20101	B83-10114	08
MFS-19762	B83-10382	06	MFS-25773	B83-10160	04	MSC-20103	B83-10032	04
MFS-19763	B83-10414	07				MSC-20109	B83-10337	04

ORIGINATING CENTER/TECH BRIEF NUMBER INDEX

MSC-20113	B83-10063	06	NPO-15029	B83-10516	01	NPO-15395	B83-10644	06
MSC-20115	B83-10238	09	NPO-15030	B83-10283	02	NPO-15398	B83-10143	03
MSC-20127	B83-10200	07	NPO-15034	B83-10562	03	NPO-15401	B83-10264	01
MSC-20187	B83-10133	02	NPO-15036	B83-10319	03	NPO-15404	B83-10294	03
MSC-20194	B83-10205	07	NPO-15037	B83-10444	07	NPO-15407	B83-10719	08
MSC-20207	B83-10154	04	NPO-15040	B83-10290	02	NPO-15411	B83-10575	04
MSC-20227	B83-10116	08	NPO-15043	B83-10268	01	NPO-15412	B83-10064	06
MSC-20228	B83-10108	08	NPO-15048	B83-10493	09	NPO-15415	B83-10720	08
MSC-20229	B83-10054	06	NPO-15049	B83-10018	02	NPO-15419	B83-10316	03
MSC-20230	B83-10089	07	NPO-15063	B83-10323	03	NPO-15426	B83-10346	04
MSC-20231	B83-10119	08	NPO-15065	B83-10083	07	NPO-15433	B83-10289	02
MSC-20233	B83-10174	06	NPO-15066	B83-10259	01	NPO-15449	B83-10010	01
MSC-20242	B83-10096	07	NPO-15070	B83-10229	08	NPO-15453	B83-10117	08
MSC-20250	B83-10210	07	NPO-15072	B83-10161	04	NPO-15454	B83-10348	04
MSC-20259	B83-10469	08	NPO-15079	B83-10703	08	NPO-15464	B83-10224	08
MSC-20270	B83-10245	09	NPO-15084	B83-10441	07	NPO-15481	B83-10477	08
MSC-20280	B83-10233	08	NPO-15089	B83-10015	02	NPO-15484	B83-10295	03
MSC-20281	B83-10208	07	NPO-15090	B83-10620	06	NPO-15492	B83-10121	09
MSC-20282	B83-10209	07	NPO-15094	B83-10610	06	NPO-15493	B83-10388	06
MSC-20283	B83-10688	08	NPO-15100	B83-10084	07	NPO-15494	B83-10389	06
MSC-20286	B83-10019	03	NPO-15105	B83-10347	04	NPO-15495	B83-10447	07
MSC-20302	B83-10009	01	NPO-15107	B83-10007	01	NPO-15510	B83-10357	04
MSC-20304	B83-10201	07	NPO-15111	B83-10309	03	NPO-15511	B83-10699	08
MSC-20318	B83-10052	06	NPO-15113	B83-10365	04	NPO-15514	B83-10138	02
MSC-20332	B83-10204	07	NPO-15114	B83-10324	03	NPO-15515	B83-10288	02
MSC-20334	B83-10505	01	NPO-15128	B83-10445	07	NPO-15517	B83-10198	07
MSC-20336	B83-10712	08	NPO-15145	B83-10576	04	NPO-15519	B83-10287	02
MSC-20337	B83-10093	07	NPO-15146	B83-10353	04	NPO-15525	B83-10537	02
MSC-20338	B83-10061	06	NPO-15148	B83-10318	03	NPO-15527	B83-10371	05
MSC-20339	B83-10111	08	NPO-15150	B83-10070	06	NPO-15531	B83-10050	06
MSC-20340	B83-10073	06	NPO-15155	B83-10017	01	NPO-15532	B83-10731	08
MSC-20348	B83-10177	06	NPO-15158	B83-10139	02	NPO-15538	B83-10472	08
MSC-20358	B83-10655	06	NPO-15161	B83-10360	04	NPO-15547	B83-10540	03
MSC-20390	B83-10416	07	NPO-15163	B83-10366	04	NPO-15550	B83-10184	06
MSC-20401	B83-10489	09	NPO-15164	B83-10430	07	NPO-15552	B83-10311	03
MSC-20404	B83-10156	04	NPO-15165	B83-10431	07	NPO-15553	B83-10228	08
MSC-20408	B83-10206	07	NPO-15166	B83-10432	07	NPO-15555	B83-10029	03
MSC-20410	B83-10724	08	NPO-15167	B83-10433	07	NPO-15560	B83-10555	03
MSC-20413	B83-10246	09	NPO-15172	B83-10267	01	NPO-15562	B83-10118	08
MSC-20423	B83-10219	08	NPO-15181	B83-10556	03	NPO-15571	B83-10601	05
MSC-20427	B83-10163	04	NPO-15183	B83-10549	03	NPO-15575	B83-10113	08
MSC-20433	B83-10202	07	NPO-15186	B83-10317	03	NPO-15580	B83-10028	03
MSC-20439	B83-10069	06	NPO-15187	B83-10181	06	NPO-15581	B83-10531	02
MSC-20447	B83-10220	08	NPO-15193	B83-10727	08	NPO-15584	B83-10006	01
MSC-20452	B83-10373	06	NPO-15202	B83-10358	04	NPO-15587	B83-10158	04
MSC-20468	B83-10088	07	NPO-15207	B83-10167	05	NPO-15589	B83-10055	06
MSC-20470	B83-10691	08	NPO-15212	B83-10485	08	NPO-15592	B83-10230	08
MSC-20503	B83-10185	06	NPO-15224	B83-10136	02	NPO-15601	B83-10039	04
MSC-20522	B83-10588	04	NPO-15226	B83-10642	06	NPO-15602	B83-10234	08
MSC-20600	B83-10667	07	NPO-15237	B83-10471	08	NPO-15603	B83-10144	03
MSC-20606	B83-10502	01	NPO-15242	B83-10558	03	NPO-15605	B83-10710	08
MSC-20625	B83-10669	07	NPO-15245	B83-10100	07	NPO-15608	B83-10107	08
MSC-20627	B83-10670	07	NPO-15256	B83-10306	03	NPO-15609	B83-10322	03
MSC-20628	B83-10362	04	NPO-15273	B83-10359	04	NPO-15610	B83-10321	03
NPO-14826	B83-10356	04	NPO-15282	B83-10253	01	NPO-15613	B83-10718	08
NPO-14827	B83-10730	08	NPO-15285	B83-10141	03	NPO-15617	B83-10101	07
NPO-14831	B83-10265	01	NPO-15288	B83-10320	03	NPO-15626	B83-10218	08
NPO-14832	B83-10363	04	NPO-15291	B83-10500	01	NPO-15628	B83-10566	03
NPO-14857	B83-10182	06	NPO-15295	B83-10282	02	NPO-15629	B83-10474	08
NPO-14872	B83-10285	02	NPO-15298	B83-10732	08	NPO-15631	B83-10443	07
NPO-14882	B83-10604	06	NPO-15304	B83-10034	04	NPO-15632	B83-10518	01
NPO-14884	B83-10476	08	NPO-15307	B83-10014	02	NPO-15634	B83-10461	08
NPO-14914	B83-10354	04	NPO-15316	B83-10488	09	NPO-15640	B83-10217	08
NPO-14923	B83-10476	08	NPO-15319	B83-10721	08	NPO-15641	B83-10257	01
NPO-14931	B83-10479	08	NPO-15342	B83-10134	02	NPO-15642	B83-10257	01
NPO-14932	B83-10269	01	NPO-15346	B83-10486	08	NPO-15643	B83-10257	01
NPO-14938	B83-10352	04	NPO-15350	B83-10135	02	NPO-15646	B83-10106	08
NPO-14945	B83-10112	08	NPO-15351	B83-10016	02	NPO-15648	B83-10232	08
NPO-14978	B83-10313	03	NPO-15352	B83-10271	01	NPO-15655	B83-10582	04
NPO-14986	B83-10579	04	NPO-15355	B83-10536	02	NPO-15658	B83-10231	08
NPO-14988	B83-10364	04	NPO-15356	B83-10473	08	NPO-15662	B83-10148	03
NPO-14995	B83-10291	02	NPO-15362	B83-10405	06	NPO-15664	B83-10214	08
NPO-14998	B83-10361	04	NPO-15370	B83-10397	06	NPO-15667	B83-10561	03
NPO-15011	B83-10492	09	NPO-15371	B83-10402	06	NPO-15674	B83-10564	03
NPO-15014	B83-10310	03	NPO-15386	B83-10523	02	NPO-15675	B83-10225	08
NPO-15021	B83-10399	06	NPO-15390	B83-10123	09	NPO-15676	B83-10011	02
NPO-15023			NPO-15392	B83-10012	02	NPO-15677	B83-10128	01
						NPO-15680	B83-10339	04

ORIGINATING CENTER/TECH BRIEF NUMBER INDEX


NPO-15681	B83-10150 03	NPO-15881	B83-10453 08
NPO-15684	B83-10527 02	NPO-15887	B83-10542 03
NPO-15686	B83-10178 06	NPO-15889	B83-10521 02
NPO-15688	B83-10511 01	NPO-15891	B83-10326 04
NPO-15689	B83-10227 08	NPO-15892	B83-10252 01
NPO-15690	B83-10308 03	NPO-15895	B83-10272 02
NPO-15692	B83-10307 03	NPO-15896	B83-10574 04
NPO-15693	B83-10404 06	NPO-15899	B83-10274 02
NPO-15694	B83-10120 08	NPO-15908	B83-10450 08
NPO-15698	B83-10547 03	NPO-15912	B83-10215 08
NPO-15699	B83-10140 03	NPO-15916	B83-10456 08
NPO-15706	B83-10650 06	NPO-15917	B83-10456 08
NPO-15710	B83-10152 04	NPO-15918	B83-10456 08
NPO-15711	B83-10327 04	NPO-15919	B83-10458 08
NPO-15715	B83-10355 04	NPO-15920	B83-10524 02
NPO-15721	B83-10155 04	NPO-15923	B83-10297 03
NPO-15722	B83-10645 06	NPO-15925	B83-10451 08
NPO-15723	B83-10557 03	NPO-15927	B83-10595 04
NPO-15727	B83-10589 04	NPO-15932	B83-10325 03
NPO-15728	B83-10176 06	NPO-15935	B83-10498 01
NPO-15729	B83-10305 03	NPO-15938	B83-10455 08
NPO-15731	B83-10223 08	NPO-15942	B83-10529 02
NPO-15734	B83-10130 01	NPO-15949	B83-10418 07
NPO-15735	B83-10149 03	NPO-15959	B83-10409 07
NPO-15739	B83-10733 08	NPO-15960	B83-10661 07
NPO-15740	B83-10452 08	NPO-15961	B83-10499 01
NPO-15741	B83-10129 01	NPO-15971	B83-10551 03
NPO-15743	B83-10503 01	NPO-15987	B83-10599 05
NPO-15748	B83-10183 06	NPO-15991	B83-10583 04
NPO-15750	B83-10697 08	NPO-15997	B83-10454 08
NPO-15754	B83-10301 03	NPO-16002	B83-10707 08
NPO-15755	B83-10126 01	NPO-16004	B83-10553 03
NPO-15758	B83-10593 04	NPO-16006	B83-10622 06
NPO-15759	B83-10277 02	NPO-16008	B83-10634 06
NPO-15760	B83-10349 04	NPO-16017	B83-10608 06
NPO-15762	B83-10560 03	NPO-16046	B83-10568 04
NPO-15763	B83-10351 04	NPO-16049	B83-10475 08
NPO-15767	B83-10153 04	NPO-16050	B83-10457 08
NPO-15768	B83-10565 03	NPO-16054	B83-10591 04
NPO-15769	B83-10314 03	NPO-16081	B83-10235 08
NPO-15772	B83-10226 08	NPO-16140	B83-10702 08
NPO-15774	B83-10302 03	NPO-16142	B83-10726 08
NPO-15776	B83-10570 04	NPO-16143	B83-10552 03
NPO-15779	B83-10263 01	NPO-16206	B83-10729 08
NPO-15784	B83-10545 03	NPO-16207	B83-10729 08
NPO-15787	B83-10507 01	NPO-16208	B83-10729 08
NPO-15789	B83-10222 08	NPO-16209	B83-10729 08
NPO-15790	B83-10329 04	NPO-16274	B83-10735 09
NPO-15796	B83-10350 04			
NPO-15797	B83-10625 06			
NPO-15798	B83-10467 08			
NPO-15800	B83-10459 08			
NPO-15806	B83-10370 05			
NPO-15807	B83-10280 02			
NPO-15808	B83-10563 03			
NPO-15809	B83-10548 03			
NPO-15810	B83-10546 03			
NPO-15825	B83-10410 07			
NPO-15826	B83-10544 03			
NPO-15827	B83-10459 08			
NPO-15828	B83-10145 03			
NPO-15838	B83-10504 01			
NPO-15839	B83-10296 03			
NPO-15840	B83-10590 04			
NPO-15841	B83-10709 08			
NPO-15844	B83-10292 02			
NPO-15847	B83-10419 07			
NPO-15850	B83-10417 07			
NPO-15852	B83-10567 03			
NPO-15854	B83-10162 04			
NPO-15856	B83-10734 09			
NPO-15858	B83-10298 03			
NPO-15868	B83-10266 01			
NPO-15869	B83-10281 02			
NPO-15873	B83-10522 02			
NPO-15874	B83-10273 02			
NPO-15878	B83-10526 02			
NPO-15880	B83-10300 03			

TECH BRIEF NUMBER INDEX

INDEX TO NASA TECH BRIEFS

DECEMBER 1986

Typical Tech Brief Number Index Listing

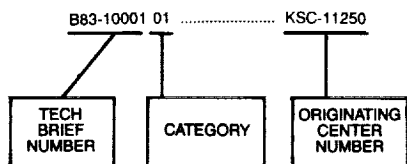

The left hand column identifies the Tech Brief number, e.g., B83-10001, followed by a two-digit number, e.g., 01, which identifies the subject category containing the entire citation. Following the subject category number is the originating Center number.

B83-10001 01	KSC-11250	B83-10045 05	MSC-20078	B83-10110 08	GSC-12739
B83-10002 01	LEW-13913	B83-10046 05	ARC-11388	B83-10111 08	MSC-20340
B83-10003 01	KSC-11256	B83-10047 06	ARC-11354	B83-10112 08	NPO-14978
B83-10004 01	LAR-12938	B83-10048 06	LAR-12890	B83-10113 08	NPO-15575
B83-10005 01	MFS-25172	B83-10049 06	LAR-12954	B83-10114 08	MSC-20101
B83-10006 01	NPO-15584	B83-10050 06	NPO-15531	B83-10115 08	LAR-12915
B83-10007 01	NPO-15107	B83-10051 06	LAR-12862	B83-10116 08	MSC-20227
B83-10008 01	GSC-12682	B83-10052 06	MSC-20318	B83-10117 08	NPO-15453
B83-10009 01	MSC-20302	B83-10053 06	LAR-12861	B83-10118 08	NPO-15562
B83-10010 01	NPO-15449	B83-10054 06	MSC-20229	B83-10119 08	MSC-20231
B83-10011 02	NPO-15676	B83-10055 06	NPO-15589	B83-10120 08	NPO-15694
B83-10012 02	NPO-15392	B83-10056 06	MFS-25690	B83-10121 09	NPO-15492
B83-10013 02	KSC-11220	B83-10057 06	MFS-25745	B83-10122 09	KSC-11230
B83-10014 02	NPO-15307	B83-10058 06	MFS-19680	B83-10123 09	NPO-15391
B83-10015 02	NPO-15089	B83-10059 06	GSC-12759	B83-10124 09	KSC-11219
B83-10016 02	NPO-15351	B83-10060 06	MFS-25729	B83-10125 01	MFS-25861
B83-10017 01	NPO-15155	B83-10061 06	MSC-20338	B83-10126 01	NPO-15755
B83-10018 02	NPO-15049	B83-10062 06	LAR-12950	B83-10127 01	LEW-13728
B83-10019 03	MSC-20286	B83-10063 06	MSC-20113	B83-10128 01	NPO-15677
B83-10020 03	FRC-11058	B83-10064 06	NPO-15412	B83-10129 01	NPO-15741
B83-10021 03	MFS-25461	B83-10065 06	MFS-25753	B83-10130 01	NPO-15734
B83-10022 03	LAR-12648	B83-10066 06	GSC-12789	B83-10131 01	LEW-13208
B83-10023 03	GSC-12745	B83-10067 06	MFS-19759	B83-10132 02	MSC-20079
B83-10024 03	GSC-12770	B83-10068 06	LAR-12815	B83-10133 02	MSC-20187
B83-10025 03	GSC-12740	B83-10069 06	MSC-20447	B83-10134 02	NPO-15342
B83-10026 03	LAR-12893	B83-10070 06	NPO-15150	B83-10135 02	NPO-15350
B83-10027 03	GSC-12640	B83-10071 06	LAR-12969	B83-10136 02	NPO-15224
B83-10028 03	NPO-15580	B83-10072 06	LAR-12924	B83-10137 02	MFS-25825
B83-10029 03	NPO-15555	B83-10073 06	MSC-20348	B83-10138 02	NPO-15514
B83-10030 03	LAR-13001	B83-10074 06	GSC-12705	B83-10139 02	NPO-15158
B83-10031 04	LAR-12980	B83-10075 06	LAR-12962	B83-10140 03	NPO-15699
B83-10032 04	MSC-20103	B83-10076 06	LEW-13842	B83-10141 03	NPO-15285
B83-10033 04	KSC-11261	B83-10077 06	LEW-13778	B83-10142 03	GSC-12761
B83-10034 04	NPO-15304	B83-10078 06	LAR-12925	B83-10143 03	NPO-15398
B83-10035 04	ARC-11261	B83-10079 06	LAR-12987	B83-10144 03	NPO-15603
B83-10036 04	MSC-20088	B83-10080 06	LAR-13015	B83-10145 03	NPO-15828
B83-10037 04	MFS-23250	B83-10081 06	LEW-13818	B83-10146 03	GSC-12756
B83-10038 04	LAR-12981	B83-10082 06	LAR-12985	B83-10147 03	LAR-12748
B83-10039 04	NPO-15601	B83-10083 07	NPO-15065		LAR-12749
B83-10040 04	ARC-11431	B83-10084 07	NPO-15100	B83-10148 03	NPO-15662
B83-10041 04	ARC-11331	B83-10085 07	GSC-12726	B83-10149 03	NPO-15735
B83-10042 04	MFS-25810	B83-10086 07	KSC-11191	B83-10150 03	NPO-15681
B83-10043 04	MFS-25741	B83-10087 07	MFS-19693	B83-10151 04	LAR-12931
B83-10044 04	MFS-25736	B83-10088 07	MSC-20470	B83-10152 04	NPO-15710
		B83-10089 07	MSC-20230	B83-10153 04	NPO-15767
		B83-10090 07	LAR-12922	B83-10154 04	MSC-20207
		B83-10091 07	MSC-20053	B83-10155 04	NPO-15721
		B83-10092 07	MFS-25519	B83-10156 04	MSC-20408
		B83-10093 07	MSC-20337	B83-10157 04	MFS-25767
		B83-10094 07	LAR-12711	B83-10158 04	NPO-15587
		B83-10095 07	MFS-19716	B83-10159 04	MFS-25767
		B83-10096 07	MSC-20242	B83-10160 04	MFS-25773
		B83-10097 07	MSC-20339	B83-10161 04	NPO-15072
		B83-10098 07	MFS-19725	B83-10162 04	NPO-15854
		B83-10099 07	MFS-19729	B83-10163 04	MSC-20433
		B83-10100 07	NPO-15245	B83-10164 05	LAR-12871
		B83-10101 07	NPO-15617	B83-10165 05	LAR-12259
		B83-10102 07	LEW-13832	B83-10166 05	GSC-12652
		B83-10103 07	LEW-13740	B83-10167 05	NPO-15207
		B83-10104 07	LEW-13437	B83-10168 06	GSC-12738
		B83-10105 08	LAR-12884	B83-10169 06	GSC-12742
		B83-10106 08	NPO-15646	B83-10170 06	MFS-19667
		B83-10107 08	NPO-15608	B83-10171 06	GSC-12753
		B83-10108 08	MSC-20228	B83-10172 06	MFS-25798
		B83-10109 08	LAR-12894	B83-10173 06	MSC-18996

NUMBER

TECH BRIEF/ORIGINATING CENTER NUMBER INDEX

B83-10174 06	MSC-20233	B83-10251 01	MFS-25211	B83-10326 04	NPO-15891
B83-10175 06	MFS-19674	B83-10252 01	NPO-15892	B83-10327 04	NPO-15711
B83-10176 06	NPO-15728	B83-10253 01	NPO-15282	B83-10328 04	GSC-12805
B83-10177 06	MSC-20358	B83-10254 01	MFS-25863	B83-10329 04	NPO-15790
B83-10178 06	NPO-15686	B83-10255 01	ARC-11303	B83-10330 04	MFS-25758
B83-10179 06	LAR-12913	B83-10256 01	LAR-12929	B83-10331 04	MFS-25721
B83-10180 06	ARC-11384	B83-10257 01	NPO-15641	B83-10332 04	ARC-11447
B83-10181 06	NPO-15187		NPO-15642	B83-10333 04	MFS-25766
B83-10182 06	NPO-14872		NPO-15643	B83-10334 04	ARC-11305
B83-10183 06	NPO-15748	B83-10258 01	LEW-13886	B83-10335 04	ARC-11402
B83-10184 06	NPO-15550	B83-10259 01	NPO-15066	B83-10336 04	ARC-11400
B83-10185 06	MSC-20522	B83-10260 01	MFS-25507	B83-10337 04	MSC-20109
B83-10186 06	LEW-13896	B83-10261 01	HQN-10936	B83-10338 04	ARC-11369
B83-10187 06	LAR-12957	B83-10262 01	MFS-25638	B83-10339 04	NPO-15680
B83-10188 06	LAR-13042	B83-10263 01	NPO-15779	B83-10340 04	MFS-25815
B83-10189 06	LEW-13854	B83-10264 01	NPO-15401	B83-10341 04	ARC-11368
B83-10190 06	LEW-13862	B83-10265 01	NPO-14832	B83-10342 04	MFS-25400
B83-10191 06	LEW-13505	B83-10266 01	NPO-15868	B83-10343 04	ARC-11464
B83-10192 06	LAR-13039	B83-10267 01	NPO-15172	B83-10344 04	MFS-27012
B83-10193 06	LAR-12959	B83-10268 01	NPO-15043	B83-10345 04	MFS-25516
B83-10194 06	LAR-12951	B83-10269 01	NPO-14938	B83-10346 04	NPO-15426
B83-10195 06	LEW-13674	B83-10270 01	MFS-25531	B83-10347 04	NPO-15105
B83-10196 06	LEW-13488	B83-10271 01	NPO-15352	B83-10348 04	NPO-15454
B83-10197 07	MFS-25171	B83-10272 02	NPO-15895	B83-10349 04	NPO-15760
B83-10198 07	NPO-15517	B83-10273 02	NPO-15874	B83-10350 04	NPO-15796
B83-10199 07	MFS-25791	B83-10274 02	NPO-15899	B83-10351 04	NPO-15763
B83-10200 07	MSC-20127	B83-10275 02	GSC-12714	B83-10352 04	NPO-14945
B83-10201 07	MSC-20304	B83-10276 02	KSC-11227	B83-10353 04	NPO-15146
B83-10202 07	MSC-20439	B83-10277 02	NPO-15759	B83-10354 04	NPO-14923
B83-10203 07	MFS-19739	B83-10278 02	KSC-11267	B83-10355 04	NPO-15715
B83-10204 07	MSC-20332	B83-10279 02	ARC-11438	B83-10356 04	NPO-14827
B83-10205 07	MSC-20194	B83-10280 02	NPO-15807	B83-10357 04	NPO-15510
B83-10206 07	MSC-20410	B83-10281 02	NPO-15869	B83-10358 04	NPO-15202
B83-10207 07	MFS-19747	B83-10282 02	NPO-15295	B83-10359 04	NPO-15273
B83-10208 07	MSC-20281	B83-10283 02	NPO-15030	B83-10360 04	NPO-15161
B83-10209 07	MSC-20282	B83-10284 02	MFS-23721	B83-10361 04	NPO-15011
B83-10210 07	MSC-20250	B83-10285 02	NPO-14882	B83-10362 04	NPO-14826
B83-10211 07	MFS-19658	B83-10286 02	KSC-11080	B83-10363 04	NPO-14857
B83-10212 07	MFS-25772	B83-10287 02	NPO-15519	B83-10364 04	NPO-14995
B83-10213 07	LEW-13528	B83-10288 02	NPO-15515	B83-10365 04	NPO-15113
B83-10214 08	NPO-15664	B83-10289 02	NPO-15433	B83-10366 04	NPO-15163
B83-10215 08	NPO-15912	B83-10290 02	NPO-15040	B83-10367 05	LAR-12471
B83-10216 08	MFS-25875	B83-10291 02	NPO-14998	B83-10368 05	ARC-11322
B83-10217 08	NPO-15640	B83-10292 02	NPO-15844	B83-10369 05	LAR-12990
B83-10218 08	NPO-15626	B83-10293 03	MFS-25511	B83-10370 05	NPO-15806
B83-10219 08	MSC-20427	B83-10294 03	NPO-15404	B83-10371 05	NPO-15527
B83-10220 08	MSC-20452	B83-10295 03	NPO-15484	B83-10372 05	MFS-25677
B83-10221 08	MFS-19783	B83-10296 03	NPO-15839	B83-10373 06	MSC-20468
B83-10222 08	NPO-15789	B83-10297 03	NPO-15923	B83-10374 06	MFS-19742
B83-10223 08	NPO-15731	B83-10298 03	NPO-15858	B83-10375 06	LAR-12887
B83-10224 08	NPO-15464	B83-10299 03	ARC-11401	B83-10376 06	MFS-19668
B83-10225 08	NPO-15675	B83-10300 03	NPO-15880	B83-10377 06	MFS-25850
B83-10226 08	NPO-15772	B83-10301 03	NPO-15754	B83-10378 06	MFS-25867
B83-10227 08	NPO-15889	B83-10302 03	NPO-15774	B83-10379 06	MFS-19769
B83-10228 08	NPO-15553	B83-10303 03	MFS-25870	B83-10380 06	GSC-12794
B83-10229 08	NPO-15070	B83-10304 03	MFS-27015	B83-10381 06	MFS-25803
B83-10230 08	NPO-15592	B83-10305 03	NPO-15729	B83-10382 06	MFS-19762
B83-10231 08	NPO-15658	B83-10306 03	NPO-15256	B83-10383 06	LAR-12930
B83-10232 08	NPO-15648	B83-10307 03	NPO-15692	B83-10384 06	GSC-12644
B83-10233 08	MSC-20280	B83-10308 03	NPO-15690	B83-10385 06	MFS-19781
B83-10234 08	NPO-15602	B83-10309 03	NPO-15111	B83-10386 06	MFS-25904
B83-10235 08	NPO-16081	B83-10310 03	NPO-15021	B83-10387 06	ARC-11361
B83-10236 08	MFS-25809	B83-10311 03	NPO-15552	B83-10388 06	NPO-15493
B83-10237 08	MFS-27003	B83-10312 03	MFS-25465	B83-10389 06	NPO-15494
B83-10238 09	MSC-20115	B83-10313 03	NPO-14986	B83-10390 06	MFS-25872
B83-10239 09	MFS-25821	B83-10314 03	NPO-15769	B83-10391 06	MFS-19752
B83-10240 09	MFS-25790	B83-10315 03	MFS-25625	B83-10392 06	LAR-12926
B83-10241 09	KSC-11252	B83-10316 03	NPO-15419		LAR-12927
B83-10242 09	KSC-11253	B83-10317 03	NPO-15186	B83-10393 06	LAR-13004
B83-10243 09	KSC-11241	B83-10318 03	NPO-15148		LAR-13164
B83-10244 09	MFS-23737	B83-10319 03	NPO-15036	B83-10394 06	LAR-12952
B83-10245 09	MSC-20270	B83-10320 03	NPO-15288	B83-10395 06	ARC-11436
B83-10246 09	MSC-20423	B83-10321 03	NPO-15610	B83-10396 06	ARC-11434
B83-10247 01	GSC-12788	B83-10322 03	NPO-15609	B83-10397 06	NPO-15371
B83-10248 01	MFS-25854	B83-10323 03	NPO-15063	B83-10398 06	MFS-25633
B83-10249 01	MFS-25852	B83-10324 03	NPO-15114	B83-10399 06	NPO-15023
B83-10250 01	MFS-25899	B83-10325 03	NPO-15932	B83-10400 06	MFS-25732

TECH BRIEF/ORIGINATING CENTER NUMBER INDEX

B83-10401 06	ARC-11263	B83-10475 08	NPO-16049	B83-10551 03	NPO-15971
B83-10402 06	NPO-15386	B83-10476 08	NPO-14914	B83-10552 03	NPO-16143
B83-10403 06	MFS-25754		NPO-14931	B83-10553 03	NPO-16004
B83-10404 06	NPO-15693	B83-10477 08	NPO-15481	B83-10554 03	MFS-27036
B83-10405 06	NPO-15370	B83-10478 08	MFS-25305	B83-10555 03	NPO-15560
B83-10406 06	MFS-25901	B83-10479 08	NPO-14932	B83-10556 03	NPO-15181
B83-10407 07	MFS-25837	B83-10480 08	MFS-19664	B83-10557 03	NPO-15723
B83-10408 07	GSC-12771	B83-10481 08	MFS-19628	B83-10558 03	NPO-15242
B83-10409 07	NPO-15959	B83-10482 08	KSC-11017	B83-10559 03	LAR-12897
B83-10410 07	NPO-15825	B83-10483 08	MFS-19631	B83-10560 03	NPO-15762
B83-10411 07	MFS-25687	B83-10484 08	MFS-19618	B83-10561 03	NPO-15667
B83-10412 07	KSC-11248	B83-10485 08	NPO-15212	B83-10562 03	NPO-15034
B83-10413 07	MFS-19789	B83-10486 08	NPO-15346	B83-10563 03	NPO-15808
B83-10414 07	MFS-19763	B83-10487 08	MFS-25922	B83-10564 03	NPO-15674
B83-10415 07	MFS-19768	B83-10488 09	NPO-15316	B83-10565 03	NPO-15768
B83-10416 07	MSC-20401	B83-10489 09	MSC-20404	B83-10566 03	NPO-15628
B83-10417 07	NPO-15850	B83-10490 09	ARC-11441	B83-10567 03	NPO-15852
B83-10418 07	NPO-15949	B83-10491 09	ARC-11446	B83-10568 04	NPO-16046
B83-10419 07	NPO-15847	B83-10492 09	NPO-15014	B83-10569 04	KSC-11278
B83-10420 07	MFS-25888	B83-10493 09	NPO-15048	B83-10570 04	NPO-15776
B83-10421 07	GSC-12773	B83-10494 09	MFS-25865	B83-10571 04	MFS-25911
B83-10422 07	ARC-11349	B83-10495 09	MFS-25898	B83-10572 04	LEW-13951
B83-10423 07	MFS-19788	B83-10496 09	MFS-27039	B83-10573 04	ARC-11164
B83-10424 07	MFS-25849	B83-10497 01	GSC-12782	B83-10574 04	NPO-15896
B83-10425 07	MFS-25848	B83-10498 01	NPO-15935	B83-10575 04	NPO-15411
B83-10426 07	MFS-19793	B83-10499 01	NPO-15961	B83-10576 04	NPO-15145
B83-10427 07	MFS-19737	B83-10500 01	NPO-15291	B83-10577 04	MFS-25917
B83-10428 07	MFS-25879	B83-10501 01	GSC-12816	B83-10578 04	LEW-13135
B83-10429 07	MFS-25510	B83-10502 01	MSC-20625	B83-10579 04	NPO-14988
B83-10430 07	NPO-15164	B83-10503 01	NPO-15743	B83-10580 04	MFS-19387
B83-10431 07	NPO-15165	B83-10504 01	NPO-15838	B83-10581 04	MFS-27002
B83-10432 07	NPO-15166	B83-10505 01	MSC-20334	B83-10582 04	NPO-15655
B83-10433 07	NPO-15167	B83-10506 01	MFS-25802	B83-10583 04	NPO-15991
B83-10434 07	KSC-11115	B83-10507 01	NPO-15787	B83-10584 04	MFS-19481
B83-10435 07	MFS-19728	B83-10508 01	MFS-25498	B83-10585 04	MFS-25621
B83-10436 07	MFS-25694	B83-10509 01	LAR-12716	B83-10586 04	MFS-25467
B83-10437 07	MFS-25834	B83-10510 01	MFS-25215	B83-10587 04	MFS-25763
B83-10438 07	MFS-19713	B83-10511 01	NPO-15688	B83-10588 04	MSC-20600
B83-10439 07	MFS-19673	B83-10512 01	ARC-11406	B83-10589 04	NPO-15727
B83-10440 07	MFS-25964	B83-10513 01	MFS-19614	B83-10590 04	NPO-15840
B83-10441 07	NPO-15084	B83-10514 01	MFS-19608	B83-10591 04	NPO-16054
B83-10442 07	MFS-19315	B83-10515 01	LAR-12900	B83-10592 04	MFS-25935
B83-10443 07	NPO-15631	B83-10516 01	NPO-15029	B83-10593 04	NPO-15758
B83-10444 07	NPO-15037	B83-10517 01	MFS-25724	B83-10594 04	MFS-27038
B83-10445 07	NPO-15128	B83-10518 01	NPO-15632	B83-10595 04	NPO-15927
B83-10446 07	MFS-25956	B83-10519 01	MFS-25868	B83-10596 04	MFS-25605
B83-10447 07	NPO-15495	B83-10520 01	KSC-11270	B83-10597 04	MFS-25707
B83-10448 08	GSC-12743	B83-10521 02	NPO-15889	B83-10598 05	ARC-11359
B83-10449 08	GSC-12751	B83-10522 02	NPO-15873	B83-10599 05	NPO-15987
B83-10450 08	NPO-15908	B83-10523 02	NPO-15390	B83-10600 05	MFS-25161
B83-10451 08	NPO-15925	B83-10524 02	NPO-15920	B83-10601 05	NPO-15571
B83-10452 08	NPO-15740	B83-10525 02	MFS-25871	B83-10602 06	MFS-25890
B83-10453 08	NPO-15881	B83-10526 02	NPO-15878	B83-10603 06	LAR-13065
B83-10454 08	NPO-15997	B83-10527 02	NPO-15684	B83-10604 06	NPO-14884
B83-10455 08	NPO-15938	B83-10528 02	LAR-13073	B83-10605 06	ARC-11363
B83-10456 08	NPO-15916	B83-10529 02	NPO-15942	B83-10606 06	LAR-13053
	NPO-15917	B83-10530 02	MFS-25679	B83-10607 06	MFS-19831
	NPO-15918	B83-10531 02	NPO-15581	B83-10608 06	NPO-16017
B83-10457 08	NPO-16050	B83-10532 02	KSC-11254	B83-10609 06	LAR-13089
B83-10458 08	NPO-15919	B83-10533 02	GSC-12804	B83-10610 06	NPO-15094
B83-10459 08	NPO-15800	B83-10534 02	KSC-11287	B83-10611 06	MFS-25873
	NPO-15827	B83-10535 02	MFS-25955	B83-10612 06	GSC-12854
B83-10460 08	MFS-25829	B83-10536 02	NPO-15355	B83-10613 06	MFS-25908
B83-10461 08	NPO-15634	B83-10537 02	NPO-15525	B83-10614 06	GSC-12795
B83-10462 08	MFS-25828	B83-10538 02	NPO-15362	B83-10615 06	LAR-12968
B83-10463 08	LAR-12939	B83-10539 03	GSC-12851	B83-10616 06	LAR-13032
B83-10464 08	KSC-11206	B83-10540 03	NPO-15547	B83-10617 06	LAR-13012
B83-10465 08	MFS-25786	B83-10541 03	GSC-12808	B83-10618 06	GSC-12824
B83-10466 08	MFS-19797	B83-10542 03	NPO-15887	B83-10619 06	MFS-19859
B83-10467 08	NPO-15798	B83-10543 03	MFS-25897	B83-10620 06	NPO-15090
B83-10468 08	MFS-25841	B83-10544 03	NPO-15826	B83-10621 06	MFS-25919
B83-10469 08	MSC-20259	B83-10545 03	NPO-15784		MFS-25920
B83-10470 08	MFS-25761	B83-10546 03	NPO-15810	B83-10622 06	NPO-16006
B83-10471 08	NPO-15237	B83-10547 03	NPO-15698	B83-10623 06	LAR-13046
B83-10472 08	NPO-15538	B83-10548 03	NPO-15809	B83-10624 06	LAR-13107
B83-10473 08	NPO-15356	B83-10549 03	NPO-15183	B83-10625 06	NPO-15797
B83-10474 08	NPO-15629	B83-10550 03	KSC-11269	B83-10626 06	GSC-12783

TECH BRIEF/ORIGINATING CENTER NUMBER INDEX

B83-10627 06	LEW-13819	B83-10704 08	LAR-12960
B83-10628 06	GSC-12801	B83-10705 08	LAR-12986
B83-10629 06	LEW-13910	B83-10706 08	MFS-25959
B83-10630 06	GSC-12802	B83-10707 08	NPO-16002
B83-10631 06	LAR-12908	B83-10708 08	MFS-25857
B83-10632 06	LAR-13026	B83-10709 08	NPO-15841
B83-10633 06	LAR-13086	B83-10710 08	NPO-15605
B83-10634 06	NPO-16008	B83-10711 08	MFS-25771
B83-10635 06	KSC-11265	B83-10712 08	MSC-20336
B83-10636 06	LAR-13198	B83-10713 08	MFS-19633
B83-10637 06	MFS-25518	B83-10714 08	MFS-27018
B83-10638 06	ARC-11466	B83-10715 08	MFS-19651
B83-10639 06	MFS-25709	B83-10716 08	MFS-19685
B83-10640 06	MFS-25934	B83-10717 08	LAR-12904
B83-10641 06	MFS-25746	B83-10718 08	NPO-15613
B83-10642 06	NPO-15226	B83-10719 08	NPO-15407
B83-10643 06	KSC-11225	B83-10720 08	NPO-15415
B83-10644 06	NPO-15395	B83-10721 08	NPO-15319
B83-10645 06	NPO-15722	B83-10722 08	MFS-27042
B83-10646 06	LAR-12785	B83-10723 08	MFS-25714
B83-10647 06	MFS-25485	B83-10724 08	MSC-20413
B83-10648 06	MFS-19599	B83-10725 08	MFS-25604
B83-10649 06	MFS-19459	B83-10726 08	NPO-16142
B83-10650 06	NPO-15706	B83-10727 08	NPO-15193
B83-10651 06	MFS-19794	B83-10728 08	MFS-25483
B83-10652 06	MFS-19892	B83-10729 08	NPO-16206
B83-10653 06	MFS-19596		NPO-16207
B83-10654 06	KSC-11247		NPO-16208
B83-10655 06	MSC-20390		NPO-16209
B83-10656 06	MFS-19753	B83-10730 08	NPO-14831
B83-10657 06	MFS-19758	B83-10731 08	NPO-15532
B83-10658 07	GSC-12799	B83-10732 08	NPO-15298
B83-10659 07	MFS-25811	B83-10733 08	NPO-15739
B83-10660 07	MFS-25881	B83-10734 09	NPO-15856
B83-10661 07	NPO-15960	B83-10735 09	NPO-16274
B83-10662 07	LEW-13921	B83-10736 09	MFS-27017
B83-10663 07	MFS-19719	B83-10737 09	GSC-12684
B83-10664 07	MFS-19814	B83-10738 09	GSC-12724
B83-10665 07	MFS-19765	B83-10739 09	GSC-12803
B83-10666 07	MSC-20080	B83-10740 09	GSC-12711
B83-10667 07	MSC-20606	B83-10741 09	GSC-12847
B83-10668 07	ARC-11404	B83-10742 09	GSC-12827
B83-10669 07	MSC-20627		
B83-10670 07	MSC-20628		
B83-10671 07	LEW-13626		
B83-10672 07	MFS-19884		
B83-10673 07	MFS-19748		
B83-10674 07	MFS-25957		
B83-10675 07	LAR-12765		
B83-10676 07	MFS-19702		
B83-10677 07	MFS-19691		
B83-10678 07	MFS-19679		
B83-10679 07	MFS-19638		
B83-10680 07	MFS-19646		
B83-10681 07	MFS-19708		
B83-10682 07	MFS-19731		
B83-10683 07	MFS-19827		
B83-10684 07	KSC-11249		
B83-10685 07	MFS-19790		
B83-10686 07	MFS-19643		
B83-10687 07	ARC-11452		
B83-10688 08	MSC-20283		
B83-10689 08	MFS-19796		
B83-10690 08	MFS-25807		
B83-10691 08	MSC-20503		
B83-10692 08	LAR-13059		
B83-10693 08	MFS-19837		
B83-10694 08	MFS-25880		
B83-10695 08	MFS-19851		
B83-10696 08	MFS-19829		
B83-10697 08	NPO-15750		
B83-10698 08	MFS-19701		
B83-10699 08	NPO-15511		
B83-10700 08	MFS-25958		
B83-10701 08	GSC-12762		
B83-10702 08	NPO-16140		
B83-10703 08	NPO-15079		